

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C

B


A

D



C

B

A

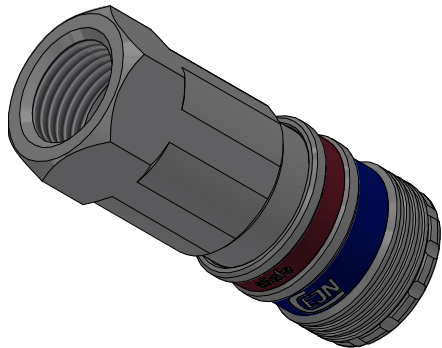


1 : 1

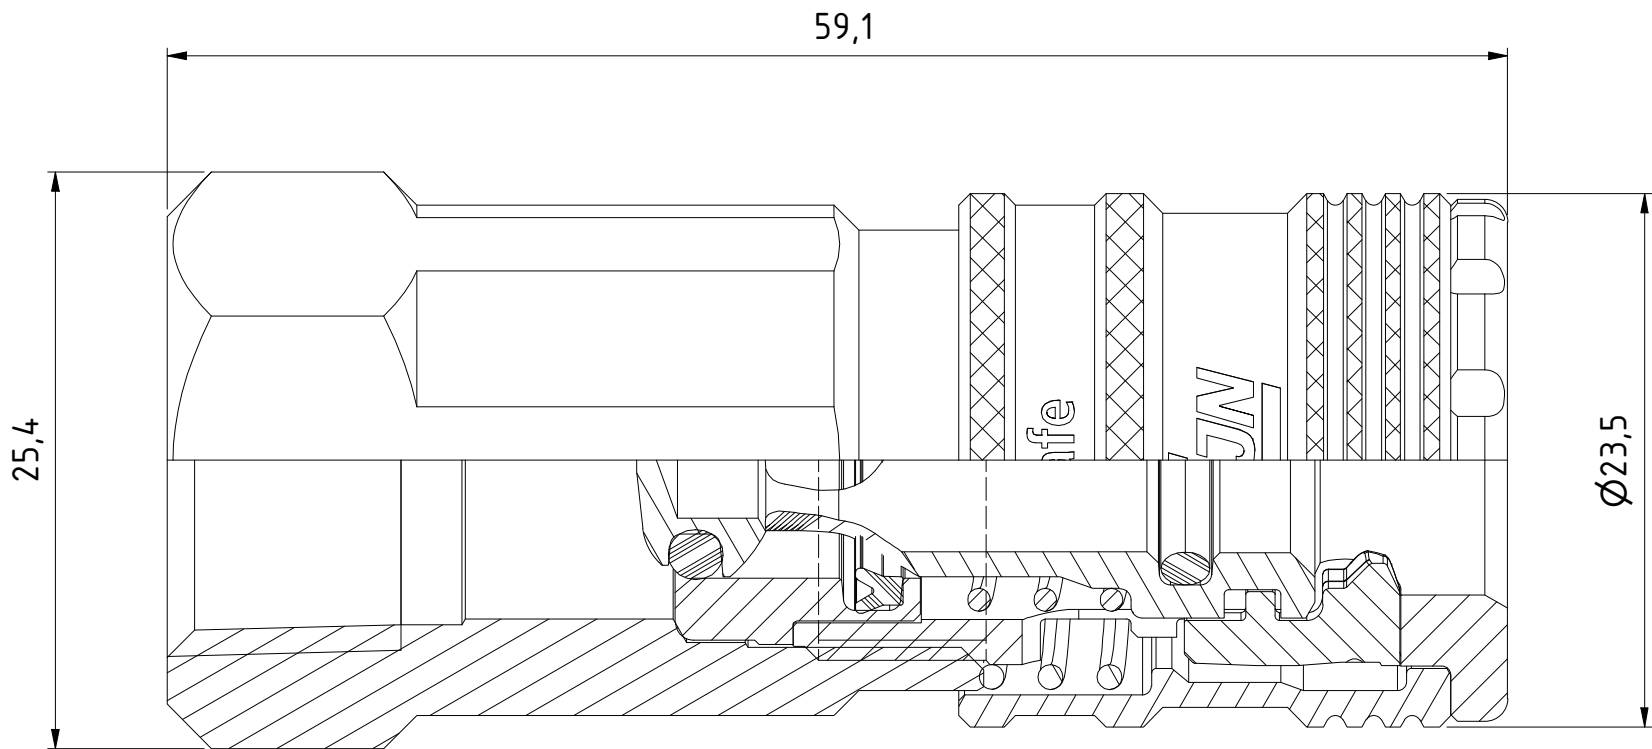

11	1	Valve	Aluminum Lead Free
10	1	Valve seat	Aluminium Lead Free
9	1	Spring	Stainless steel
8	1	Spring	Stainless steel
7	1	Lip seal	NBR
6	1	O-ring	NBR
5	1	O-ring	NBR
4	1	Locking sleeve	Hard. steel, Zn 8 Silver
3	2	Hook	Hard. Steel, Zn-Ni 8 transp.
2	1	Front part	Hard. Steel, Zn 8 Silver
1	1	Back part	Steel, Zn 8 Silver
Item	Qty	Description	Material

State	Drawn	Checked	Approved	Date
Production	CABALAL	LIJA	OSJO	2025-01-20
 Coupling 3/8" NPT fem NBR - eSafe		ECO	Former No.	Scale
		002136		1 : 1
Drawing No.			Issue	Sheet
103102404			B	1 /(1)



Connection stroke

Product No. 103102404

Nominal flow Ø DN: 5,3 mm
Connection Stroke: 19,5 mm
Max WP Connected: 16 bar
Min BP Connected: 140 bar
Temperature range: -20°C - +100°C
Connection: NPT 3/8" Fem
Sealing material: NBR
Hexagon: 22