

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C

B


A

D



C

B

A

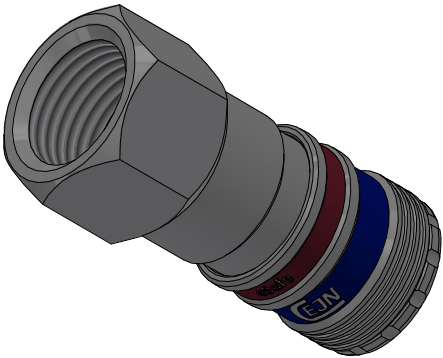


1 : 1

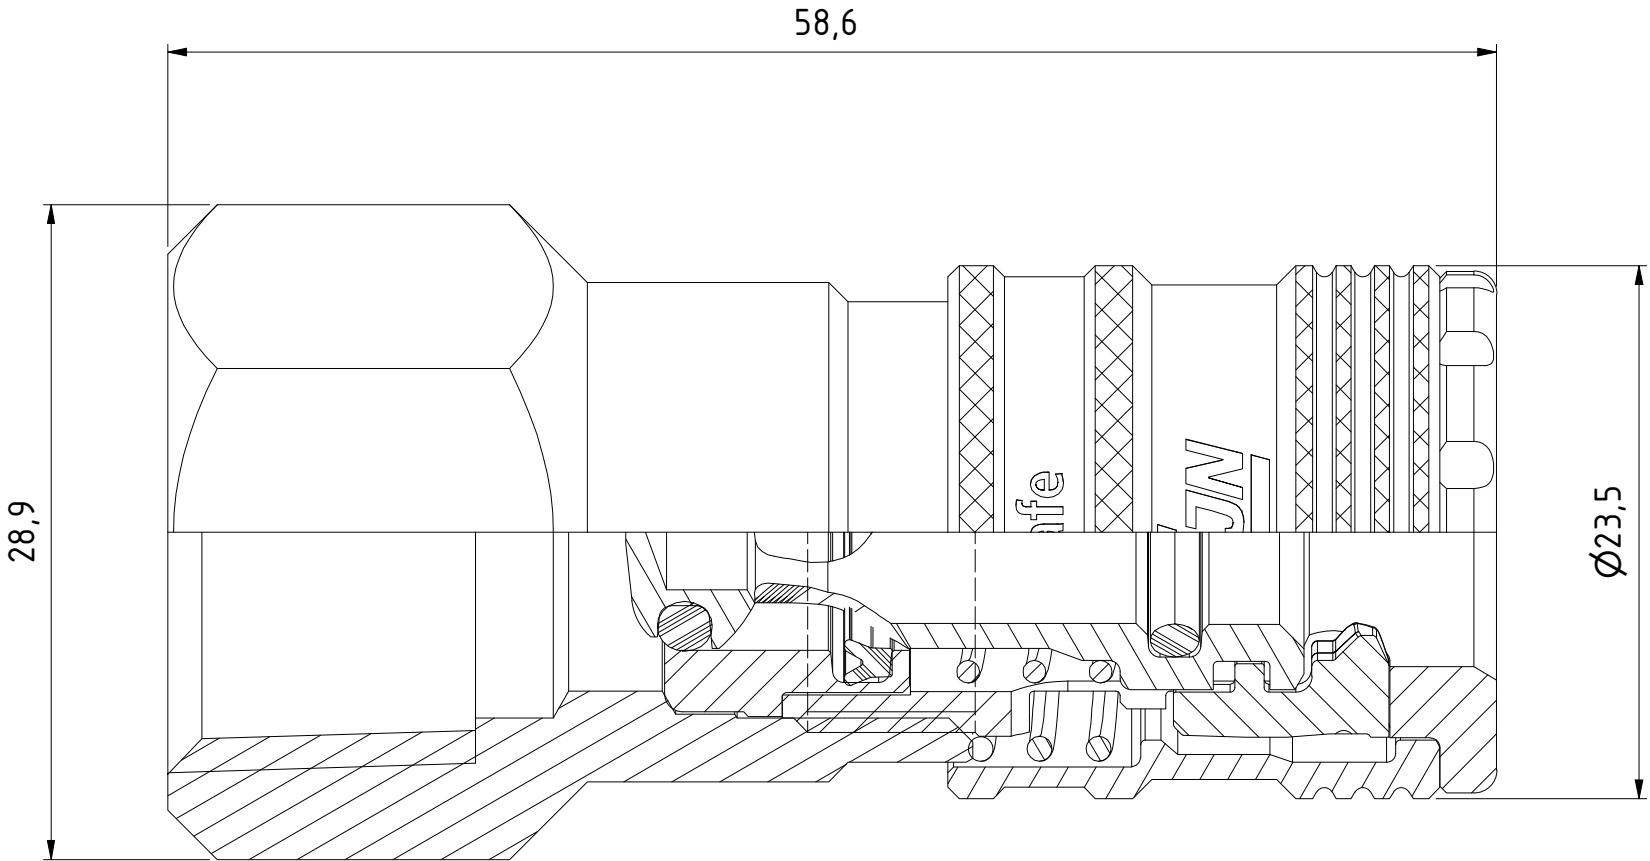

11	1	Valve	Aluminum Lead Free
10	1	Valve seat	Aluminium Lead Free
9	1	Spring	Stainless steel
8	1	Spring	Stainless steel
7	1	Lip seal	NBR
6	1	O-ring	NBR
5	1	O-ring	NBR
4	1	Locking sleeve	Hard. steel, Zn 8 Silver
3	2	Hook	Hard. Steel, Zn-Ni 8 transp.
2	1	Front part	Hard. Steel, Zn 8 Silver
1	1	Back part	Steel, Zn 8 silver

Item	Qty	Description	Material
State		Drawn	Checked
Production		CABALAL	LIJA
ECO		Approved	Date
002136		OSJO	2025-01-21
Drawing No.		Former No.	Scale
103102405			1 : 1
Issue		Sheet	
B		1 /(1)	



Connection stroke

Product No.	103102405
Nominal flow Ø DN:	5,3 mm
Connection Stroke:	19,5 mm
Max WP Connected:	16 bar
Min BP Connected:	140 bar
Temperature range:	-20°C - +100°C
Connection:	NPT 1/2" Fem
Sealing material:	NBR
Hexagon:	25



Coupling 1/2" NPT fem NBR - eSafe