

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D




C

B

A

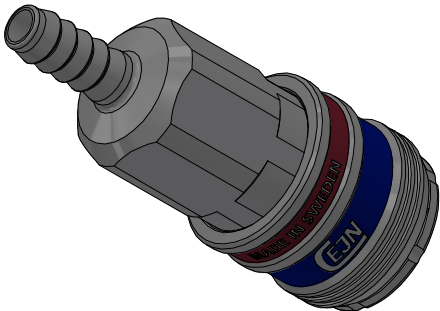

1 : 1

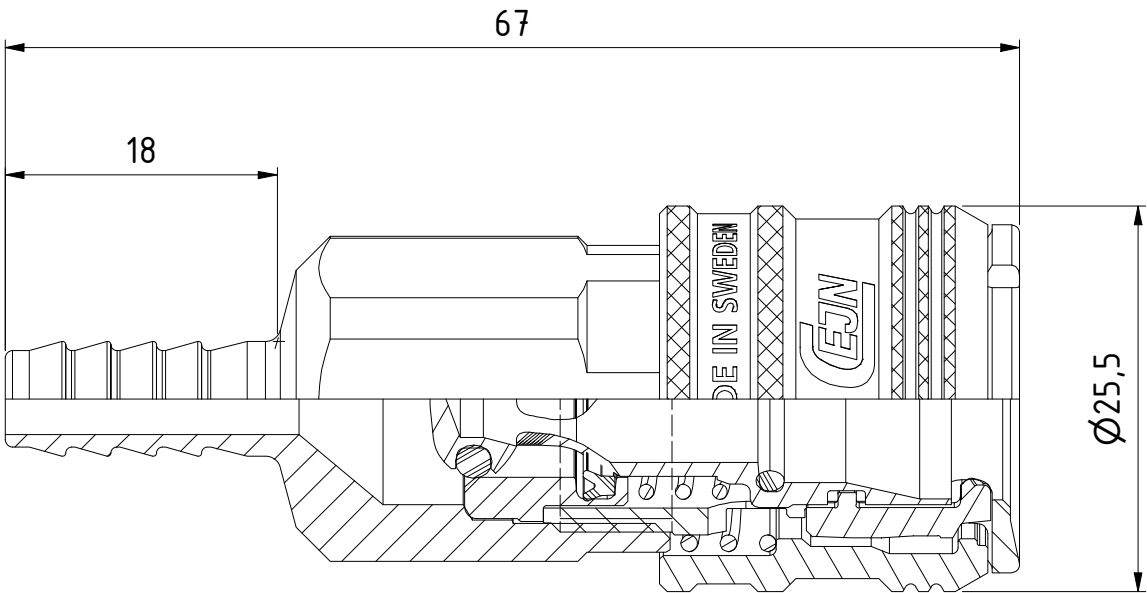

Connection stroke

Product No.	103152002
Nominal flow Ø DN:	4,7 mm
Connection Stroke:	19,7 mm
Max WP Connected:	16 bar
Min BP Connected:	64 bar
Temperature range:	-20°C - +100°C
Connection:	Hose 1/4" 6.3mm
Sealing material:	NBR
Hexagon:	20

11	1	Valve	Aluminium Lead Free
10	1	Valve seat	Aluminium Lead Free
9	1	Spring	Stainless steel
8	1	Locking sleeve	Hard. Steel, Zn 8 silver
7	2	Hook	Hard. Steel, Zn-Ni 8 Transp.
6	1	Lip seal	NBR
5	1	Spring	Stainless steel
4	1	O-ring	NBR
3	1	O-ring	NBR
2	1	Front part	Hard. Steel, Zn 8 Silver
1	1	Back part	Steel, Zn 8 Silver

Item	Qty	Description	Material
State		Drawn	Checked
Production		CABLHE	LIJA
ECO		Approved	Date
002136		OSJO	2025-01-16
Former No.		Scale	
Drawing No.		2 : 1	
103152002		Issue	Sheet
		C	1 /(1)



Coupling 1/4" hose NBR - eSafe