

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C

B


A

D



C

B

A

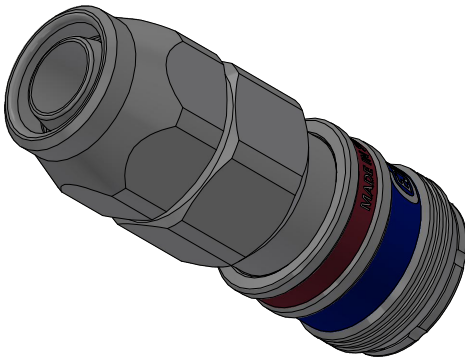


1 : 1

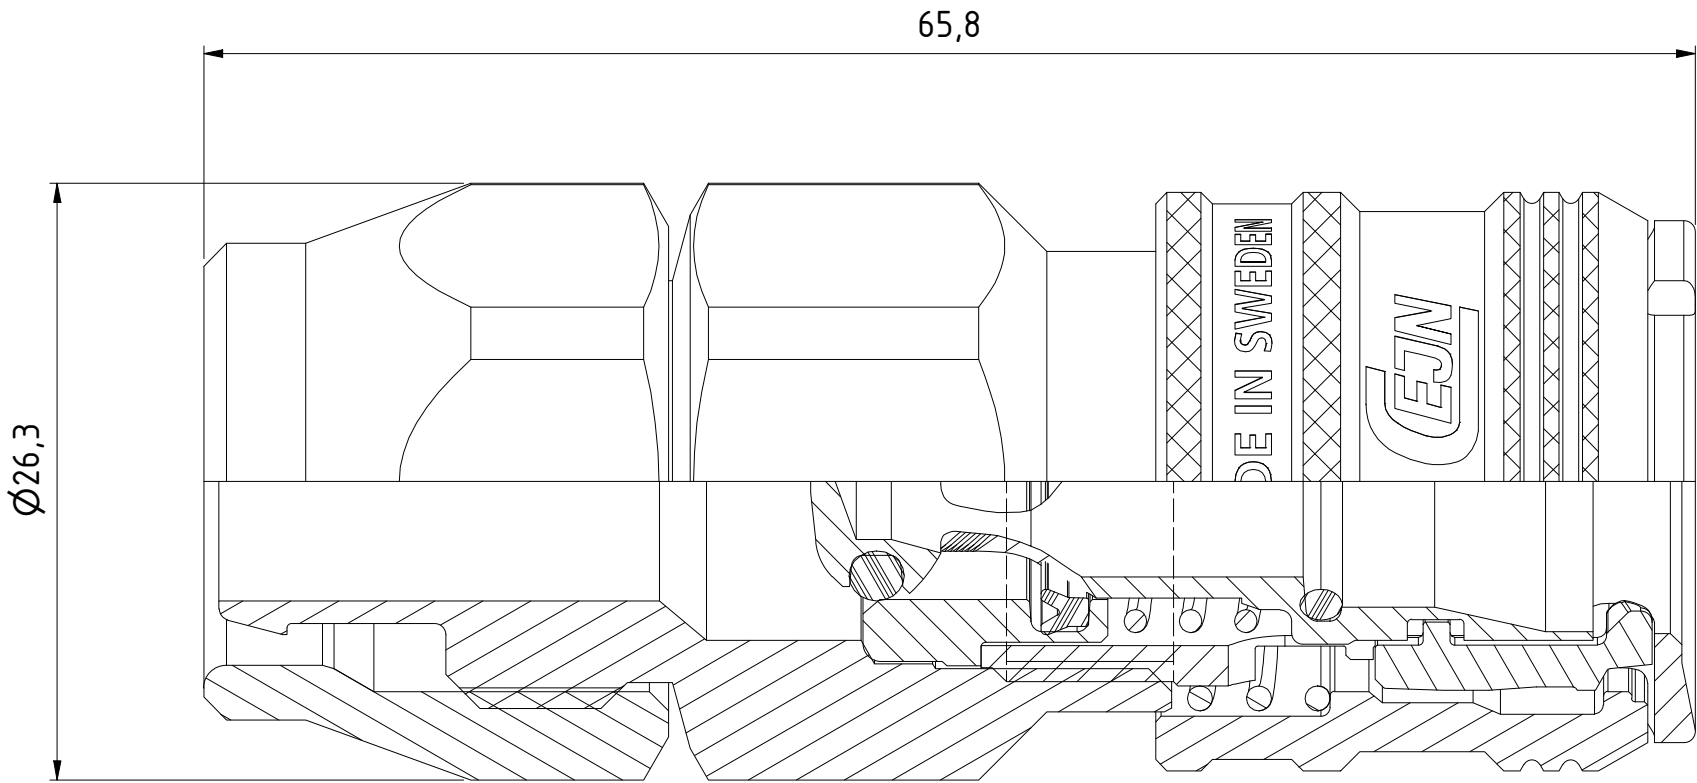

12	1	Valve	Aluminium Lead Free
11	1	Valve seat	Aluminium Lead Free
10	1	Spring	Stainless steel
9	1	Locking sleeve	Hard. Steel, Zn 8 silver
8	2	Hook	Hard. Steel, Zn-Ni 8 Transp.
7	1	Lip seal	NBR
6	1	Spring	Stainless steel
5	1	O-ring	NBR
4	1	O-ring	NBR
3	1	Front part	Hard. Steel, Zn 8 Silver
2	1	Swivel nut 11x16	Steel, Zn 8 Silver
1	1	Back part 11x16	Steel, Zn 8 Silver

Item	Qty	Description	Material
State		Drawn	Checked
Production		CABLHE	LIJA
ECO		Approved	Date
002136		OSJO	2025-01-16
Former No.		Scale	
		3 : 1	
Drawing No.		Issue	Sheet
103152066		D	1 /(1)



Connection stroke

Product No.	103152066
Nominal flow Ø DN:	7,5 mm
Connection Stroke:	19,7 mm
Max WP Connected:	12 bar w. CEJN braided PUR hose
Min BP Connected:	48 bar w. CEJN braided PUR hose
Temperature range:	-20°C - +100°C
Connection:	Stream-line 11x16
Sealing material:	NBR
Hexagon:	24 (2x)



Coupling Stream-Line 11 x 16 mm NBR - eSafe