

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D




C

B

A

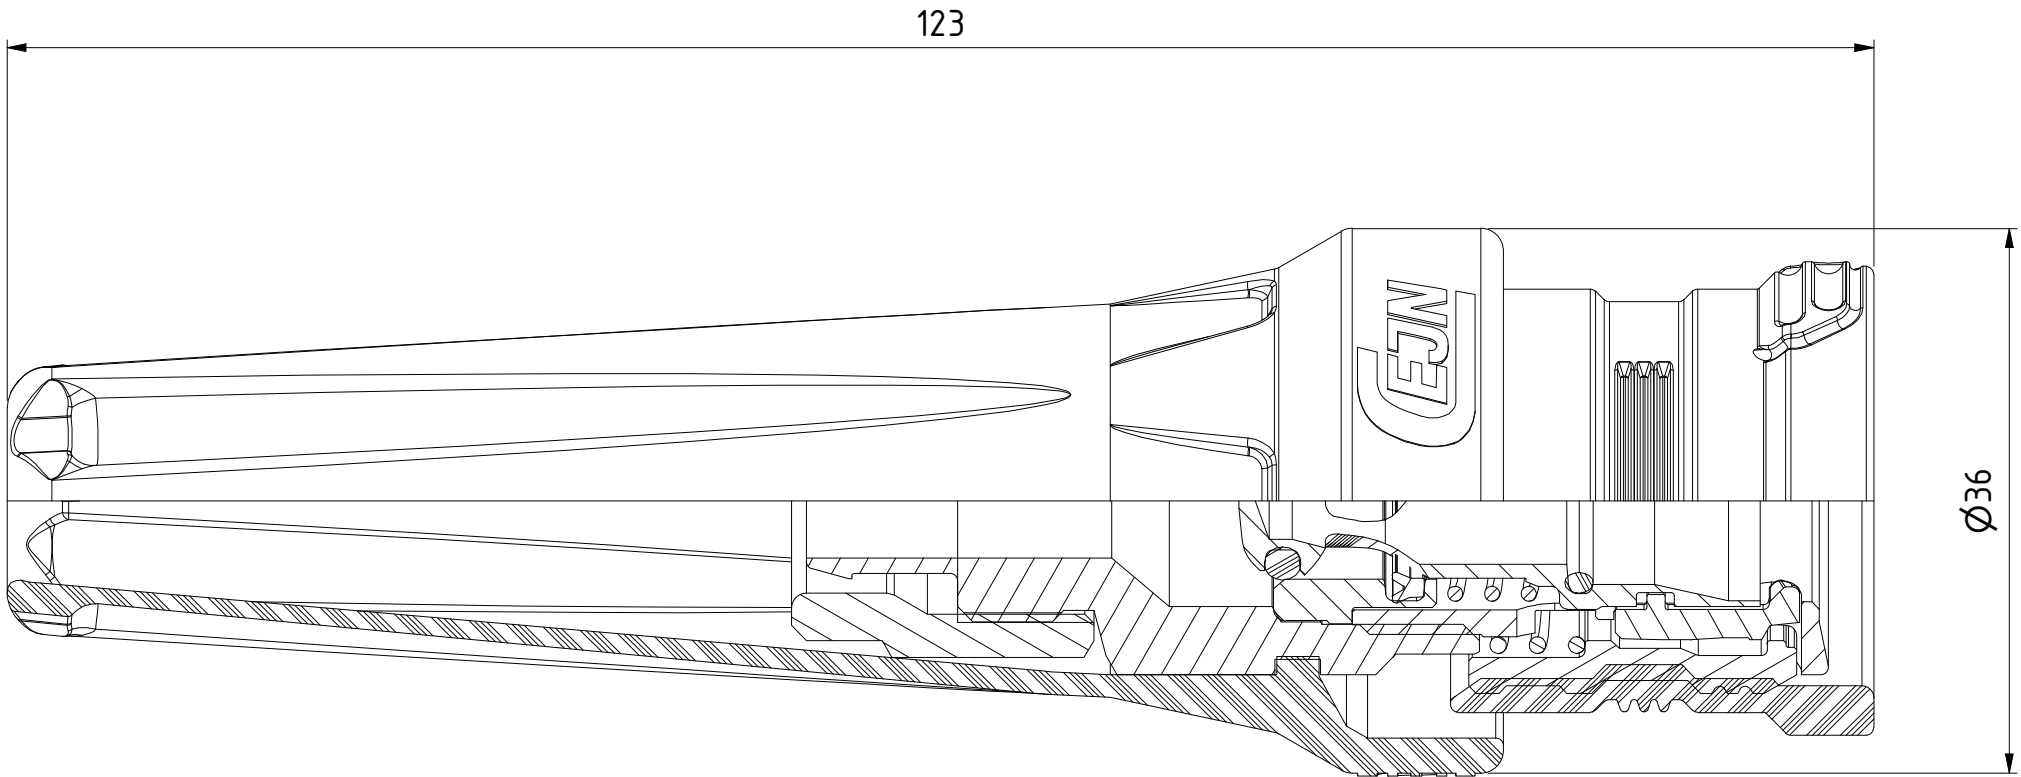

1 : 2



Connection stroke

14	1	Back Part Cover	Rubber
13	1	Locking Sleeve Cover	Rubber
12	1	Spring	Stainless steel
11	1	Locking sleeve	Hard. Steel, Zn 8 silver
10	2	Hook	Hard. Steel, Zn-Ni 8 Transp.
9	1	Lip seal	NBR
8	1	Valve seat	Aluminium Lead Free
7	1	Spring	Stainless steel
6	1	O-ring	NBR
5	1	O-ring	NBR
4	1	Valve	Aluminium Lead Free
3	1	Front part	Hard. Steel, Zn 8 Silver
2	1	Swivel nut 8x12	Steel, Zn 8 Silver
1	1	Back part	Aluminium

Item	Qty	Description	Material
State		Drawn	Checked
Production		CABLHE	LIJA
ECO		Approved	Date
002136		OSJO	2025-01-16
Former No.		Scale	
		2 : 1	
Drawing No.		Issue	Sheet
103152082		D	1 /(1)



Coupling Stream-Line 8 x 12
mm NBR - eSafe, Soft-Line

Product No.	103152082
Nominal flow Ø DN:	7,4 mm
Connection Stroke:	19,7 mm
Max WP Connected:	16 bar w. CEJN braided PUR hose
Min BP Connected:	64 bar w. CEJN braided PUR hose
Temperature range:	-20°C - +100°C
Connection:	Stream-Line 8x12
Sealing material:	NBR
Hexagon:	19/21