

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D



C

B

A

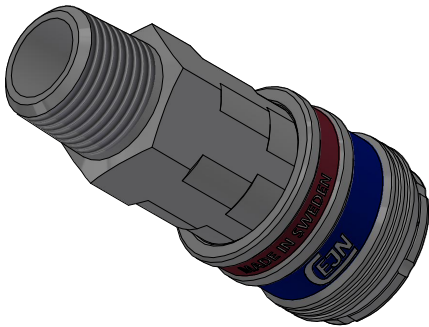


1 : 1

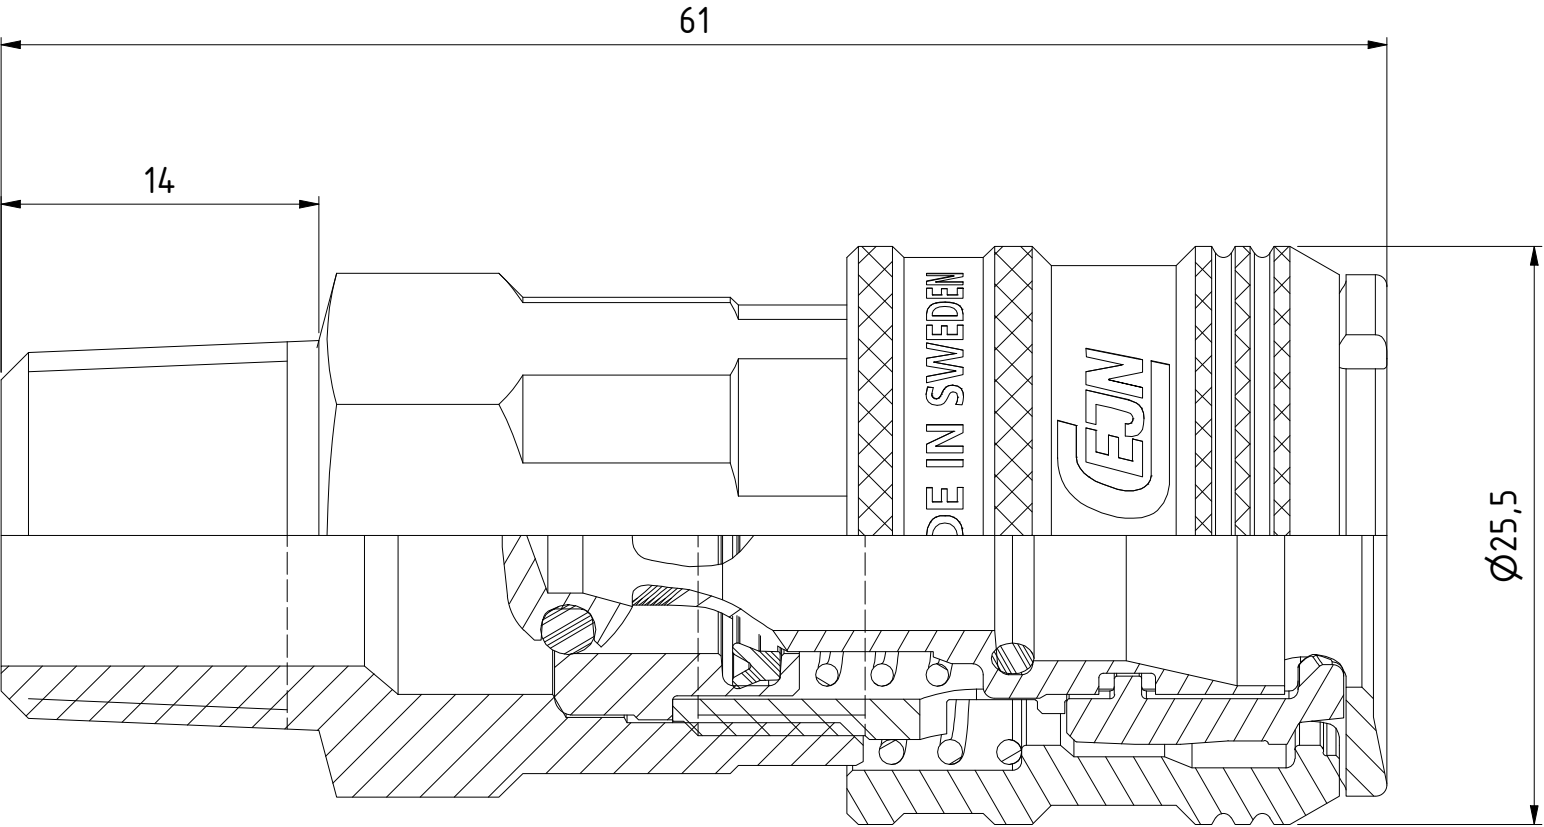

|    |   |                |                              |
|----|---|----------------|------------------------------|
| 11 | 1 | Valve          | Aluminium Lead Free          |
| 10 | 1 | Valve seat     | Aluminium Lead Free          |
| 9  | 1 | Spring         | Stainless steel              |
| 8  | 1 | Locking sleeve | Hard. Steel, Zn 8 silver     |
| 7  | 2 | Hook           | Hard. Steel, Zn-Ni 8 Transp. |
| 6  | 1 | Lip seal       | NBR                          |
| 5  | 1 | Spring         | Stainless steel              |
| 4  | 1 | O-ring         | NBR                          |
| 3  | 1 | O-ring         | NBR                          |
| 2  | 1 | Front part     | Hard. Steel, Zn 8 Silver     |
| 1  | 1 | Back part      | Steel, Zn 8 Silver           |

| Item        | Qty | Description | Material   |
|-------------|-----|-------------|------------|
| State       |     | Drawn       | Checked    |
| Production  |     | CABLHE      | LIJA       |
| Approved    |     | OSJO        | Date       |
|             |     |             | 2025-01-21 |
| ECO         |     | Former No.  | Scale      |
| 002136      |     |             | 3 : 1      |
| Drawing No. |     | Issue       | Sheet      |
| 103152154   |     | B           | 1 /(1 )    |



Connection stroke

Product No. 103152154  
Nominal flow Ø DN: 7,5 mm  
Connection Stroke: 19,7 mm  
Max WP Connected: 16 bar  
Min BP Connected: 140 bar  
Temperature range: -20°C - +100°C  
Connection: R 3/8" Male  
Sealing material: NBR  
Hexagon: 20



Coupling R 3/8" male NBR - eSafe