

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C

B


A

D



C

B

A

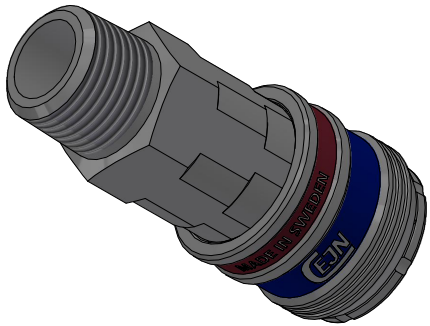


1 : 1

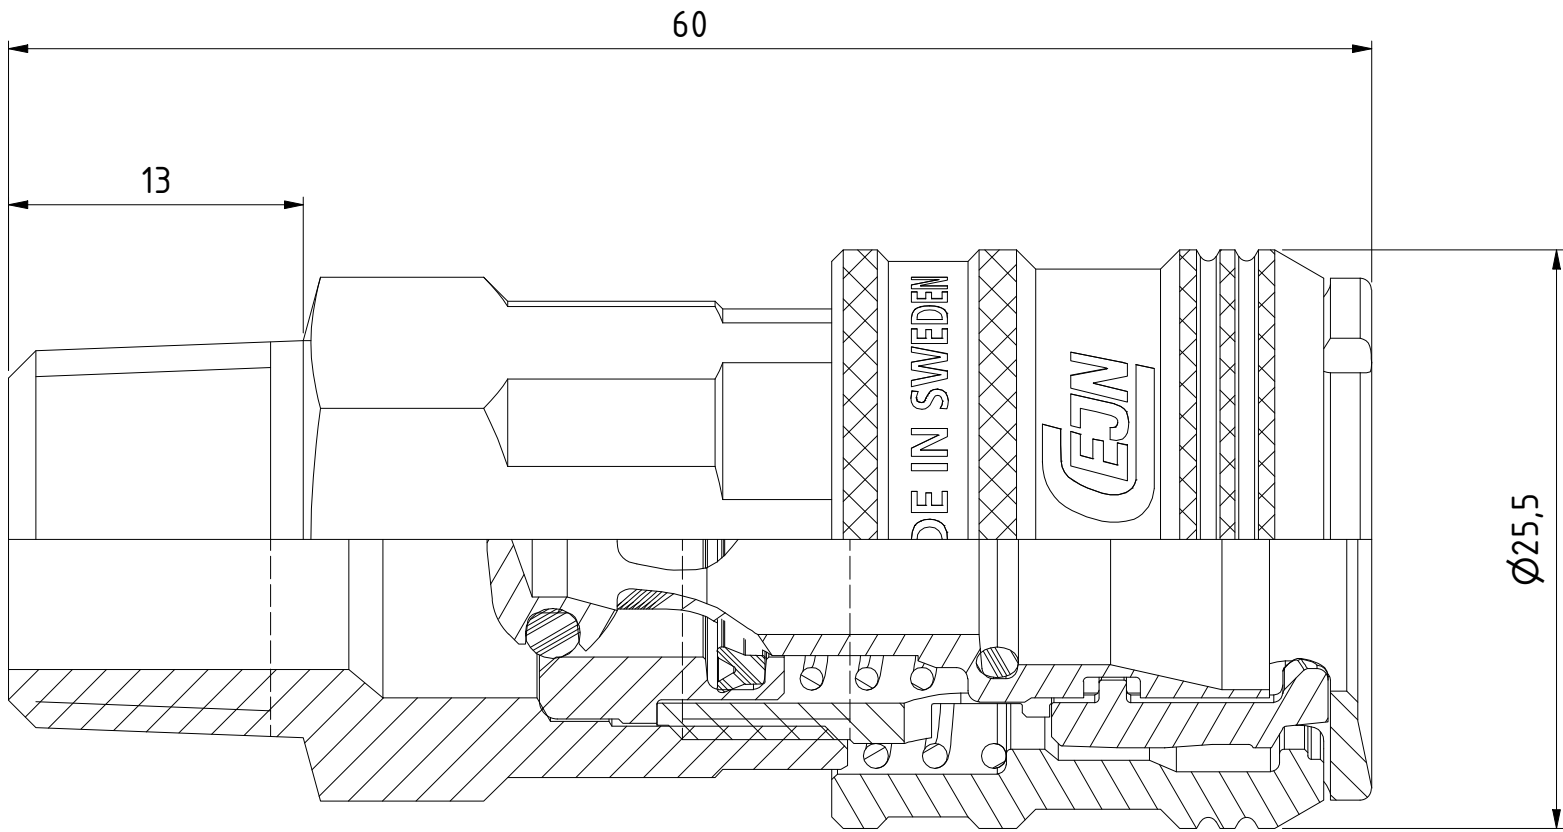

11	1	Valve	Aluminium Lead Free
10	1	Valve seat	Aluminium Lead Free
9	1	Spring	Stainless steel
8	1	Locking sleeve	Hard. Steel, Zn 8 silver
7	2	Hook	Hard. Steel, Zn-Ni 8 Transp.
6	1	Lip seal	NBR
5	1	Spring	Stainless steel
4	1	O-ring	NBR
3	1	O-ring	NBR
2	1	Front part	Hard. Steel, Zn 8 Silver
1	1	Back part	Steel, Zn 8 Silver

Item	Qty	Description	Material			
State		Drawn	Checked	Approved	Date	
Production		CABLHE	LIJA	OSJO	2025-01-21	
 Coupling 3/8" NPT male NBR - eSafe			ECO	Former No.		Scale
			002136			3 : 1
Drawing No.					Issue	Sheet
103152454					B	1 /(1)



Connection stroke

Product No.	103152454
Nominal flow Ø DN:	7,5 mm
Connection Stroke:	19,7 mm
Max WP Connected:	16 bar
Min BP Connected:	140 bar
Temperature range:	-20°C - +100°C
Connection:	NPT 3/8"Male
Sealing material:	NBR
Hexagon:	20