

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D


C

B

A



1 : 1

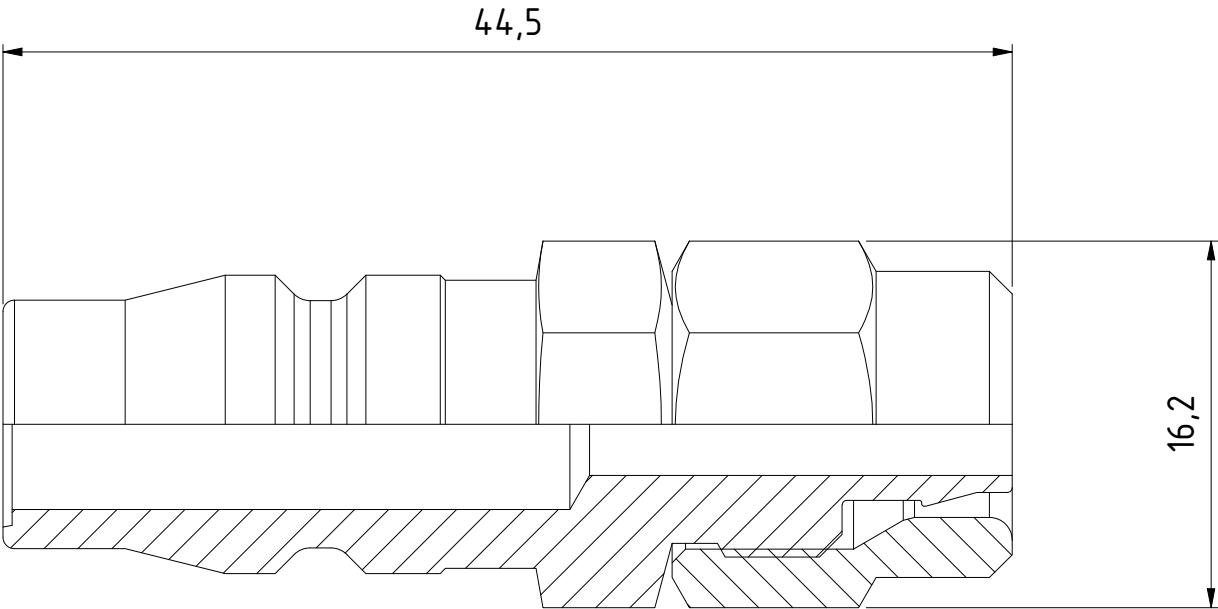

* WP/BP is valid with CEJN non-braided hose

Product No.	103155058
Nominal flow $\varnothing$ DN:	4,5 mm
Connection Stroke:	mm
Max WP Connected:	10 bar *
Min BP Connected:	25 bar *
Temperature range:	-20°C - +100°C
Connection:	Stream-line 5x8
Sealing material:	
Hexagon:	14 (2x)

2	1	Swivel nut	Steel, Zn 8 Silver
1	1	Nipple body	Hard. steel, Zn 8 Silver
Item	Qty	Description	Material
		Scale	3 : 1
		Drawn	CABANLA
		Checked	JOTU
		Appr.	JOOL
		ECO	12833
		Date	2020-03-20
		Drawing No.	503155058
		Issue	AC
		Sheet	1 /(1)



Assembly Drawing 503155058