

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D


C

B

A

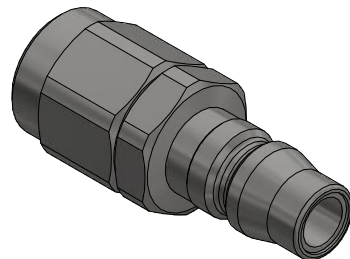

1 : 1

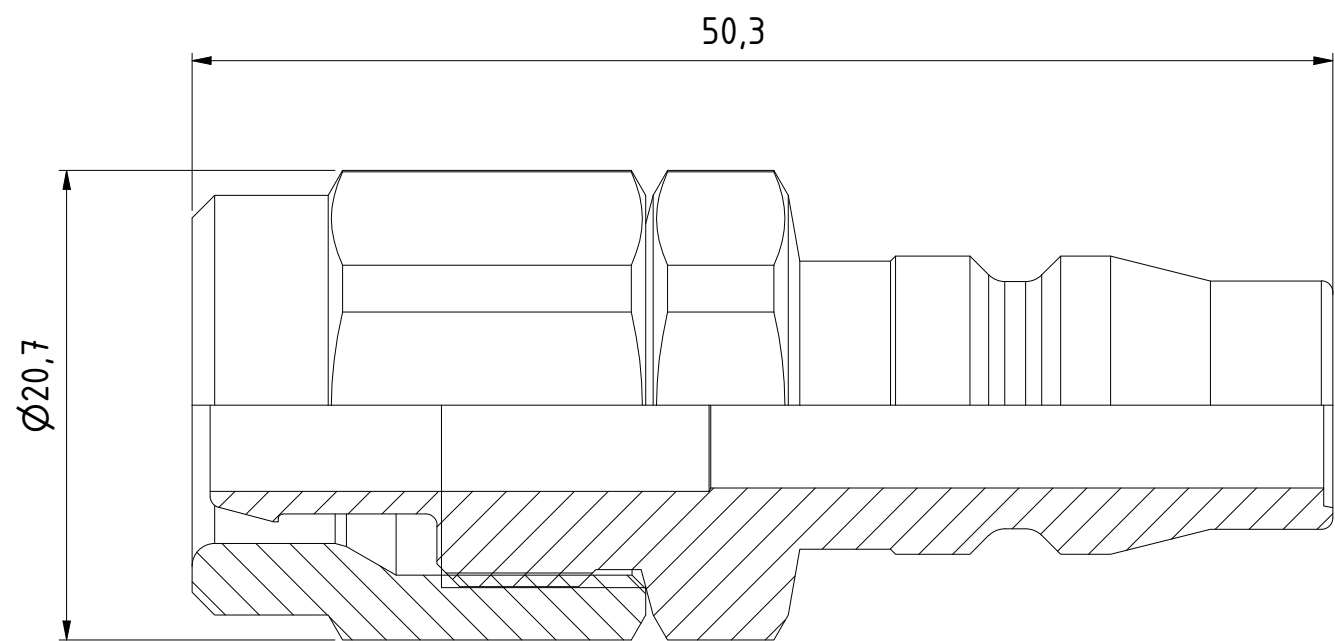

Product No. 103155062	
Nominal flow Ø DN:	7,3 mm
Connection Stroke:	mm
Max WP Connected:	16 bar w. CEJN braided PUR hose
Min BP Connected:	64 bar w. CEJN braided PUR hose
Temperature range:	-20°C - +100°C
Connection:	Stream-line 8x12
Sealing material:	
Hexagon:	19 (2x)

2	1	Swivel nut 8x12	Steel, Zn 8 Silver			
1	1	Nipple body 8x12	Hard. steel, Zn 8 Silver			
Item	Qty	Description	Material			
		Scale 3 : 1	Drawn CABANLA	Checked JOTU	Appr. JOOL	ECO 12833
		Date 2020-03-18			Issue AF	Sheet 1 /(1)
		Drawing No. 503155062				



Assembly Drawing 503155062