

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B

A

D


C

B


A





1 : 2

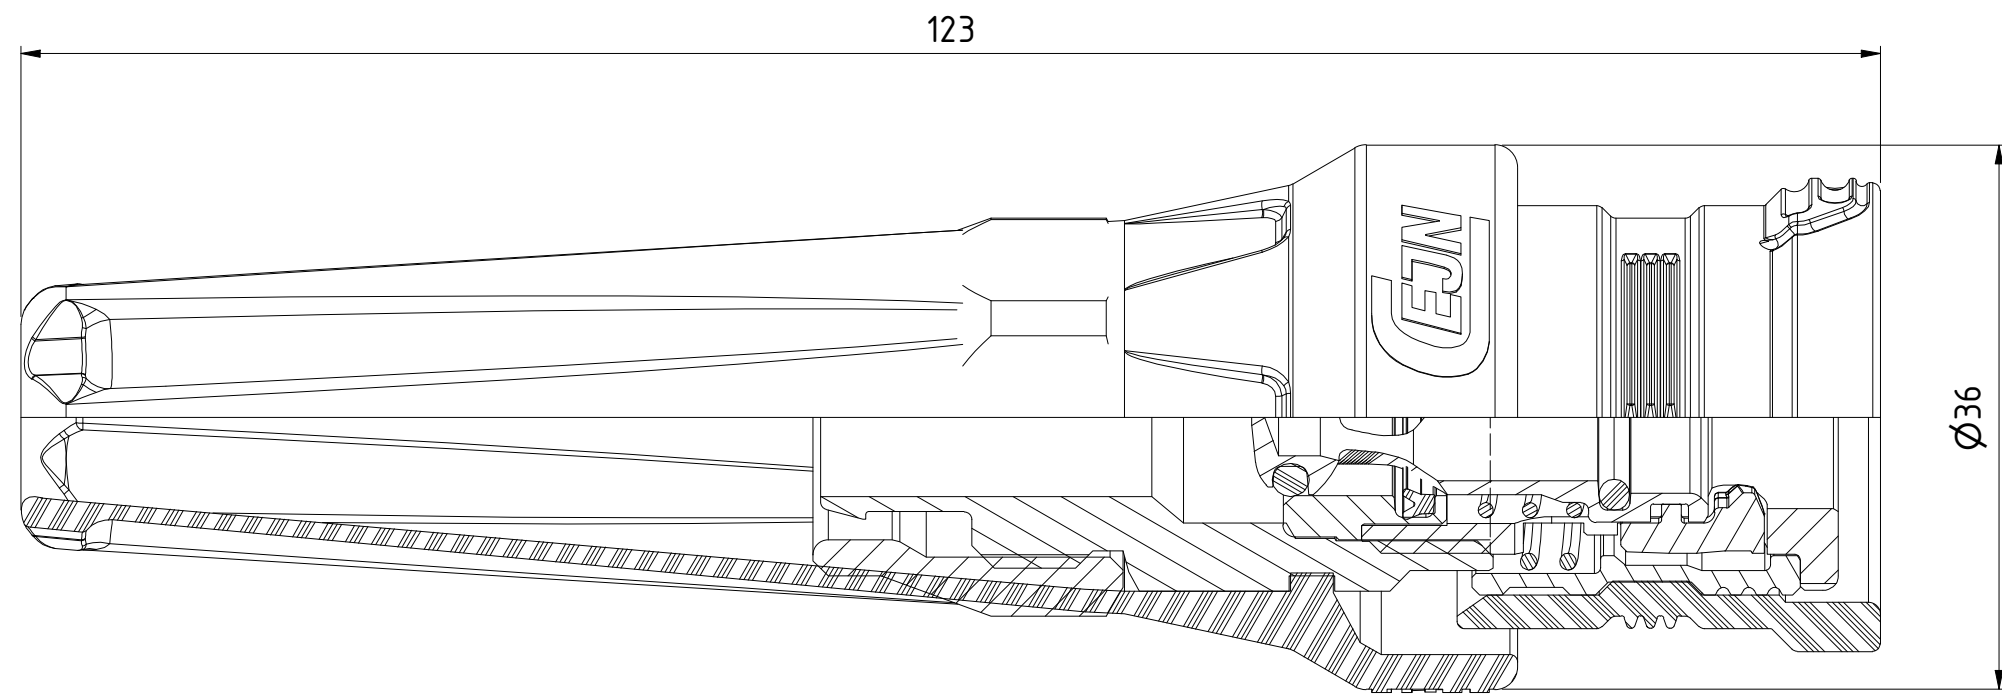

Product No. 103202085	
Nominal flow Ø DN:	7,6 mm
Connection Stroke:	19,2 mm
Max WP Connected:	12 bar w. CEJN braided PUR hose
Min BP Connected:	48 bar w. CEJN braided PUR hose
Temperature range:	-20°C - +100°C
Connection:	Stream-Line 11x16
Sealing material:	NBR
Hexagon:	21/24

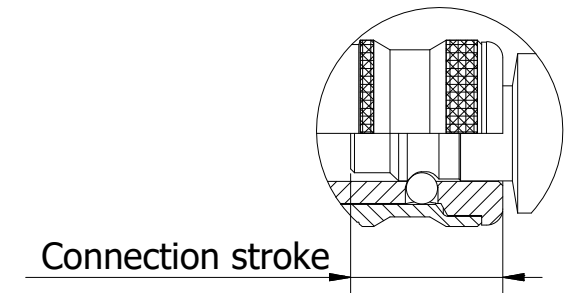

Connection stroke



14	1	Back Part Cover	Rubber
13	1	Locking Sleeve Cover	Rubber
12	1	Swivel nut 11x16	Steel, Zn 8 Silver
11	1	Back part	Aluminium
10	1	Spring	Stainless steel
9	1	Spring	Stainless steel
8	1	Lip seal	NBR
7	1	Valve seat	Aluminium Lead Free
6	1	O-ring	NBR
5	1	O-ring	NBR
4	1	Valve	Aluminium Lead Free
3	1	Locking sleeve	Hard. steel, Zn 8 Silver
2	2	Hook	Hard. Steel, Zn-Ni 8 transp.
1	1	Front part	Hard. Steel, Zn 8 silver
Item	Qty	Description	Material
State Production		Drawn CABLIJA	Checked ALAL
		Approved OSJO	Date 2025-05-08
		ECO 002136	Former No.
		Scale 2 : 1	
		Drawing No. 103202085	Issue D
			Sheet 1 /(1)



Coupling Stream-Line 11 x 16 mm NBR - eSafe, Soft-Line