



This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

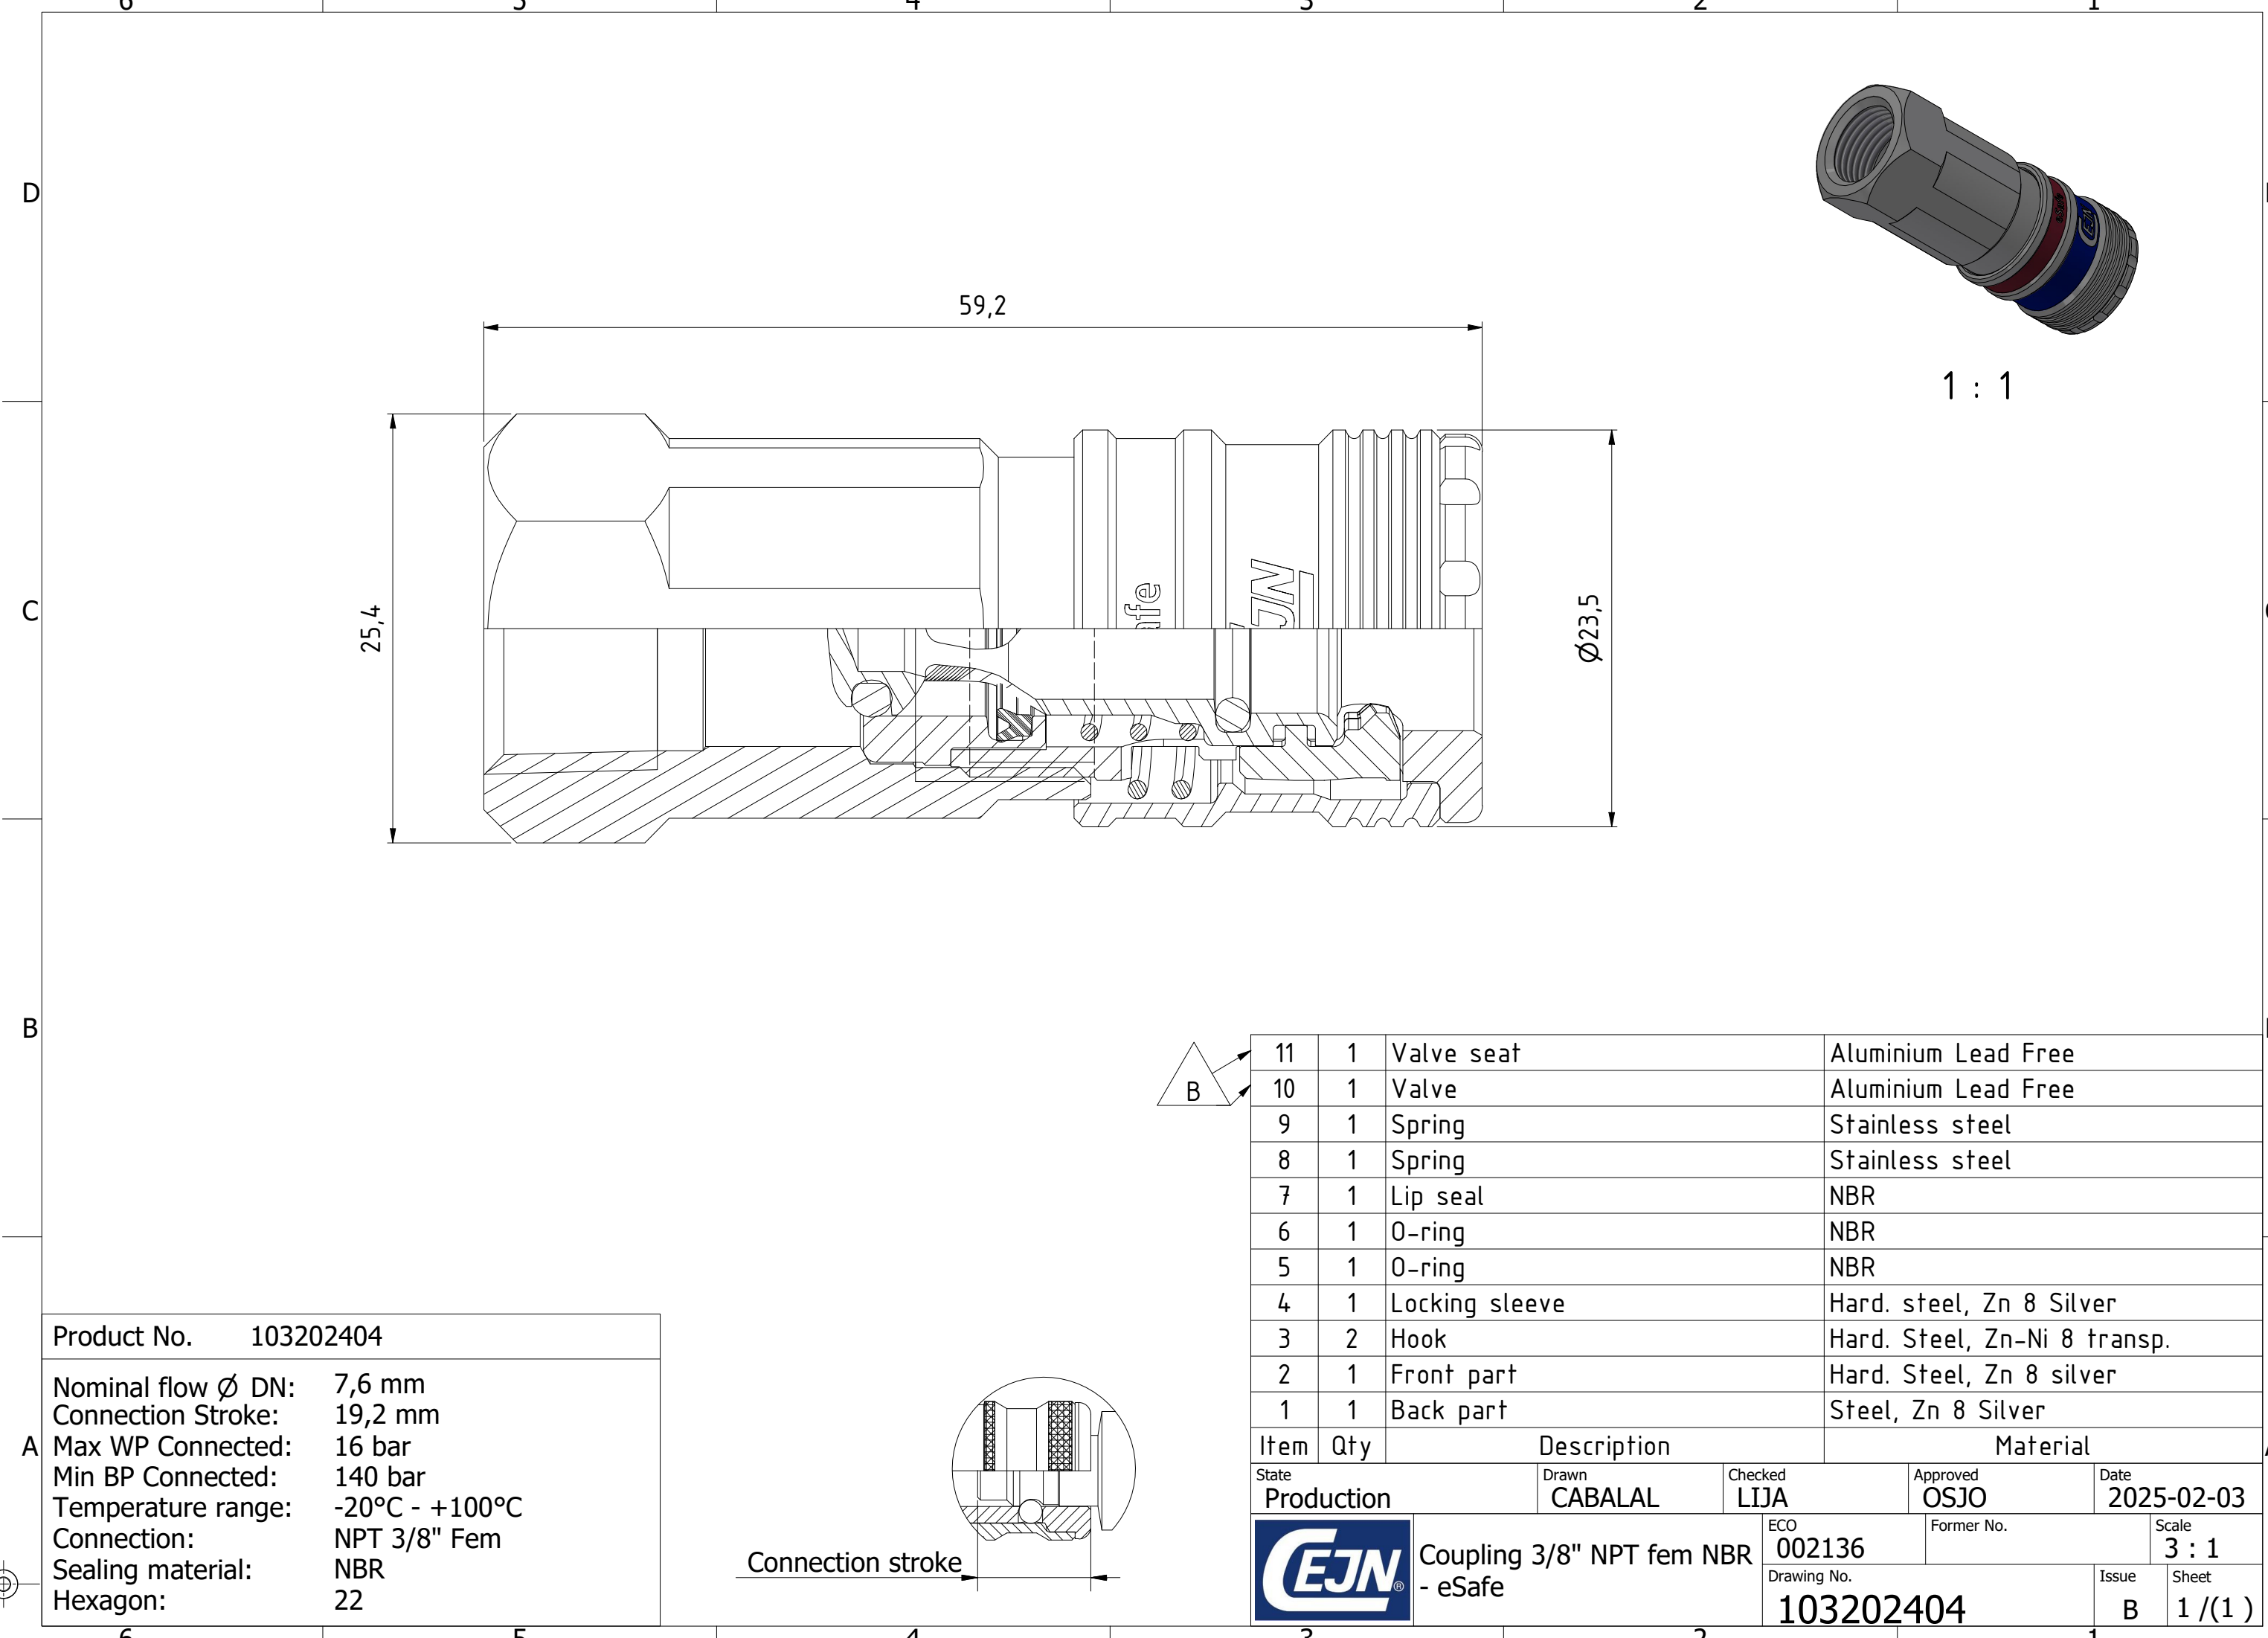

Product No. 103202404	
Nominal flow Ø DN:	7,6 mm
Connection Stroke:	19,2 mm
Max WP Connected:	16 bar
Min BP Connected:	140 bar
Temperature range:	-20°C - +100°C
Connection:	NPT 3/8" Fem
Sealing material:	NBR
Hexagon:	22

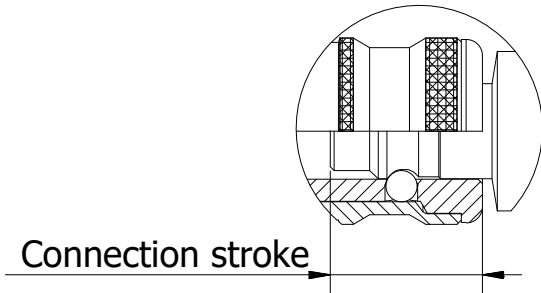

	11	1	Valve seat	Aluminium Lead Free
	10	1	Valve	Aluminium Lead Free
	9	1	Spring	Stainless steel
	8	1	Spring	Stainless steel
	7	1	Lip seal	NBR
	6	1	O-ring	NBR
	5	1	O-ring	NBR
	4	1	Locking sleeve	Hard. steel, Zn 8 Silver
	3	2	Hook	Hard. Steel, Zn-Ni 8 transp.
	2	1	Front part	Hard. Steel, Zn 8 silver
	1	1	Back part	Steel, Zn 8 Silver
Item		Qty	Description	Material
State			Drawn	Checked
Production			CABALAL	LIJA
			Approved	
			OSJO	
			Date	
			2025-02-03	
			ECO	Scale
			002136	3 : 1
			Former No.	
			Drawing No.	Issue
			103202404	B
			Sheet	
			1 /(1)	



Coupling 3/8" NPT fem NBR - eSafe