

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D



C

B


A

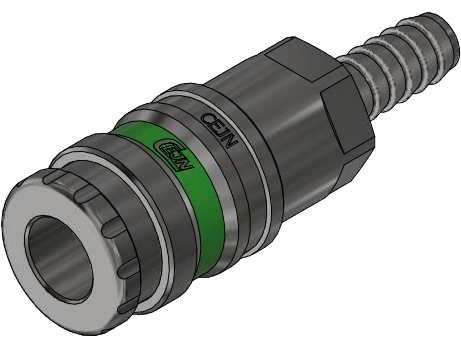

1 : 1

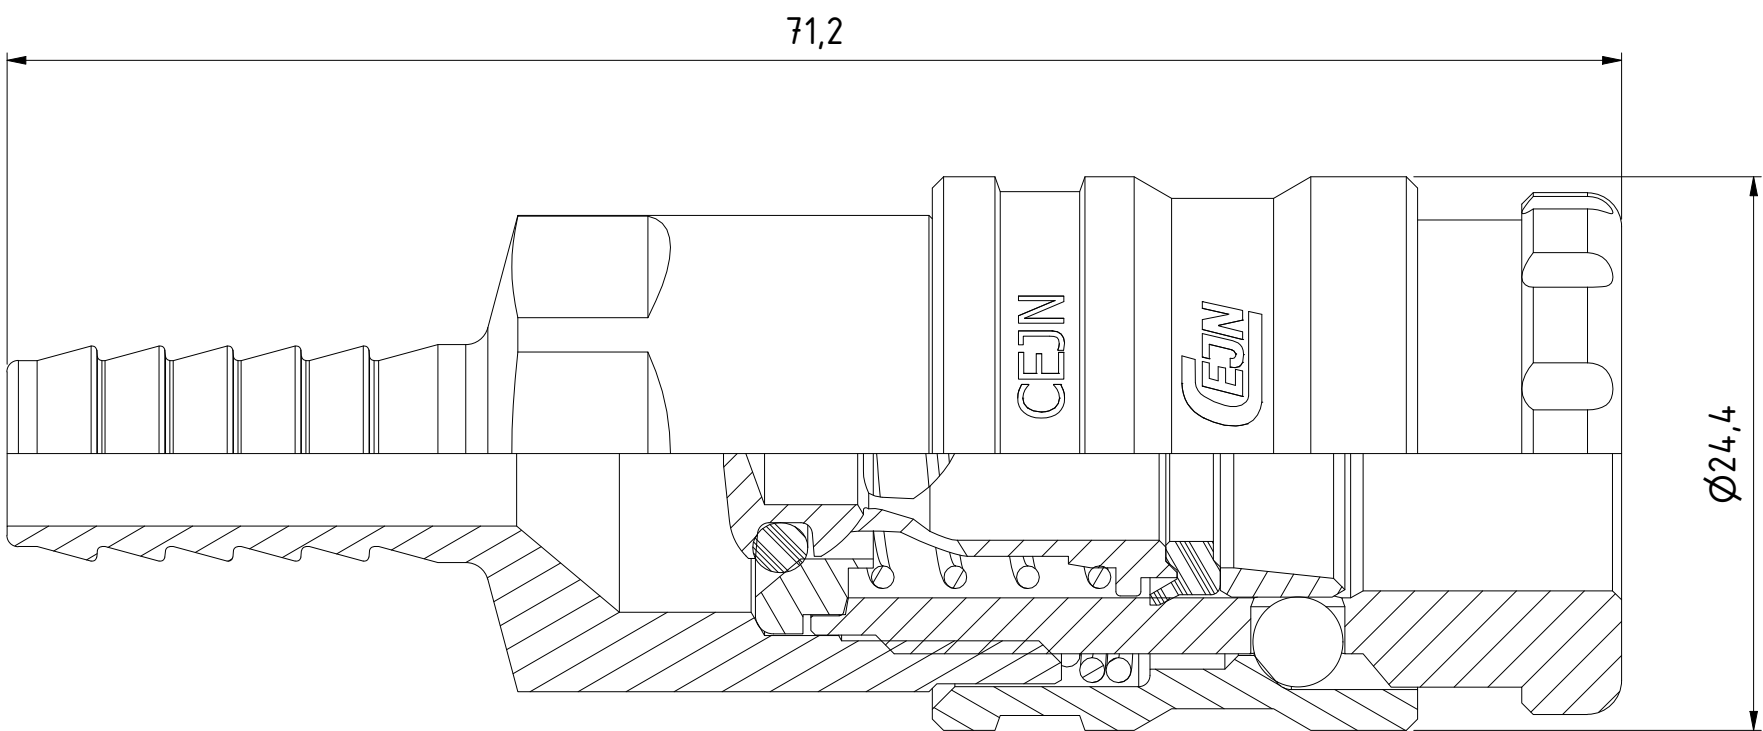

Connection stroke



11	1	Back part	Brass, Ni5b
10	1	Locking sleeve	Brass, Ni5b
9	1	Valve seat	Brass
8	1	Spring	Stainless steel
7	1	O-ring	NBR
6	1	Valve	Brass
5	1	Spring	Stainless steel
4	1	Lip seal	NBR
3	1	Ratchet sleeve	Stainless steel
2	6	Ball	Acid proof steel
1	1	Front part	Brass, Ni5b
Item	Qty	Description	Material
	Scale	Drawn	Checked
	3 : 1	CABLHE	ANLA
	Appr.		
		JOOL	ECO
		12561	Date
		2019-08-07	
		Drawing No.	Issue
		503411034	Sheet
		AD	1 /(1)

Product No. 103411034	
Nominal flow Ø DN:	6,4 mm
Connection Stroke:	22,7 mm
Max WP Connected:	35 bar
Min BP Connected:	140 bar
Temperature range:	-30°C - +100°C
Connection:	Hose 5/16" 8mm
Sealing material:	NBR
Hexagon:	19