

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B



A

D


C

B


A

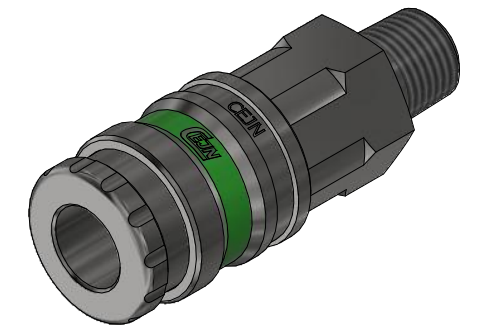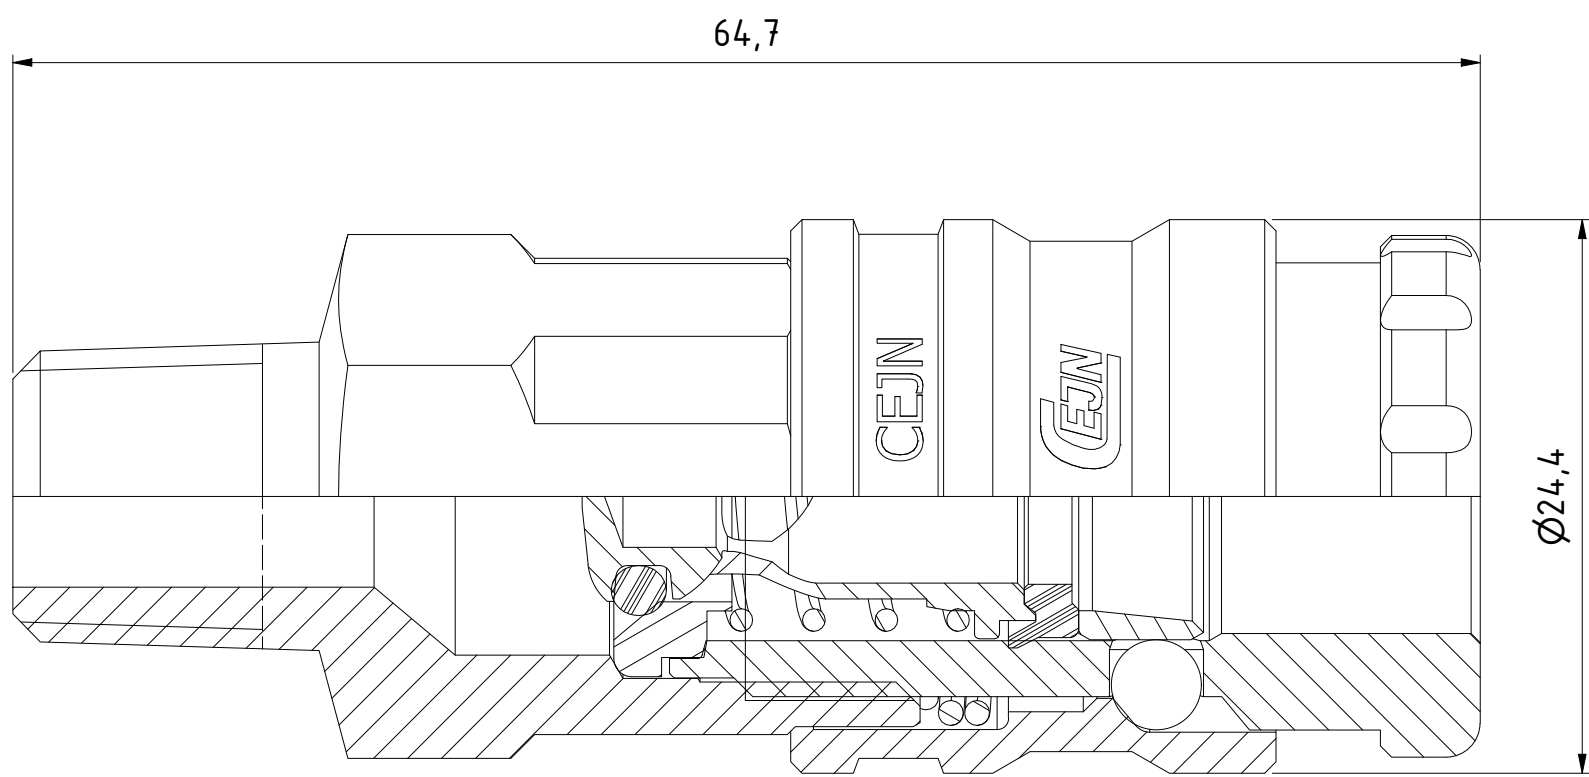

1 : 1



Product No. 103411152	
Nominal flow Ø DN:	7.4 mm
Connection Stroke:	22.7 mm
Max WP Connected:	35 bar
Min BP Connected:	140 bar
Temperature range:	-30°C - +100°C
Connection:	R 1/4" male
Sealing material:	NBR
Hexagon:	20

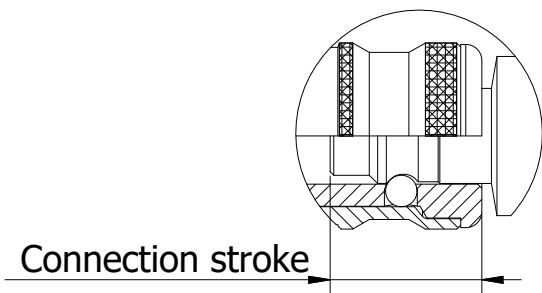

Connection stroke

11	1	Locking sleeve	Brass, Ni5b
10	1	Valve seat	Brass
9	1	Spring	Stainless steel
8	1	O-ring	NBR
7	1	Valve	Brass
6	1	Spring	Stainless steel
5	1	Lip seal	NBR
4	1	Ratchet sleeve	Stainless steel
3	6	Ball	Acid proof steel
2	1	Front part	Brass, Ni5b
1	1	Back part	Brass, Ni5
Item	Qty	Description	Material
Scale		3 : 1	Drawn CABLHE
Checked		ANLA	Appr. JOOL
ECO		12561	Date 2019-08-07
Drawing No.		503411152	Issue AD
Sheet		1 / (1)	



Assembly Drawing 503411152