

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D



C

B

A

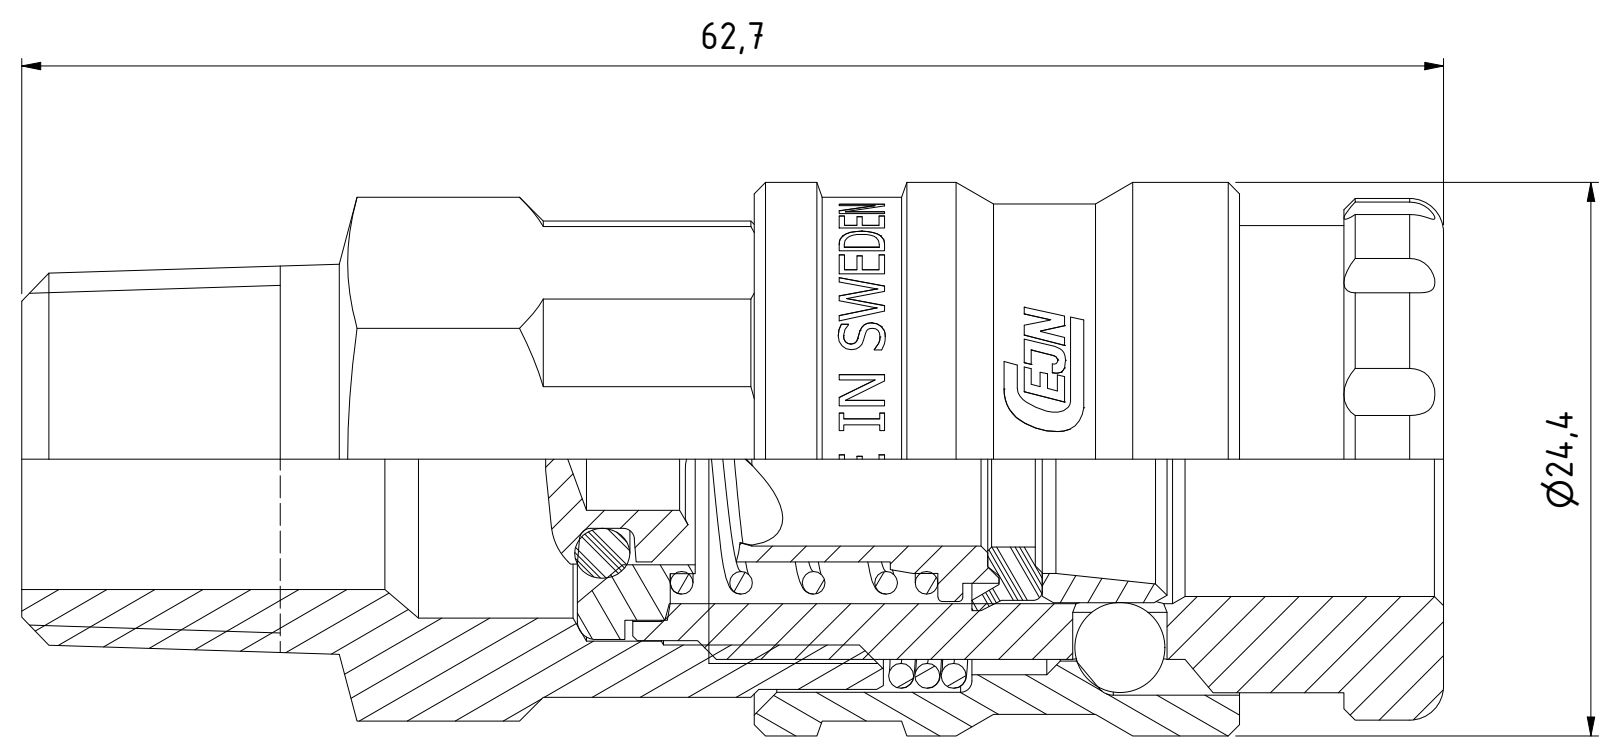

1 : 1



Connection stroke

Product No.	103411154
Nominal flow Ø DN:	7.4 mm
Connection Stroke:	22.7 mm
Max WP Connected:	35 bar
Min BP Connected:	140 bar
Temperature range:	-30°C - +100°C
Connection:	R 3/8" male
Sealing material:	NBR
Hexagon:	20

11	1	Locking sleeve	Brass, Ni5b
10	1	Valve seat	Brass
9	1	Spring	Stainless steel
8	1	O-ring	NBR
7	1	Valve	Brass
6	1	Spring	Stainless steel
5	1	Lip seal	NBR
4	1	Ratchet sleeve	Stainless steel
3	6	Ball	Acid proof steel
2	1	Front part	Brass, Ni5b
1	1	Back part	Brass, Ni5b
Item	Qty	Description	Material
		Scale 3 : 1	Drawn CABLHE
		Checked ANLA	Appr. JOOL
		ECO 12561	Date 2019-08-08
		Drawing No. 503411154	Issue AD
			Sheet 1 /(1)



Assembly Drawing 503411154