

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B



A

D


C

B


A

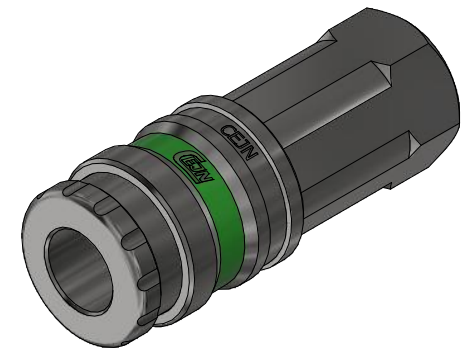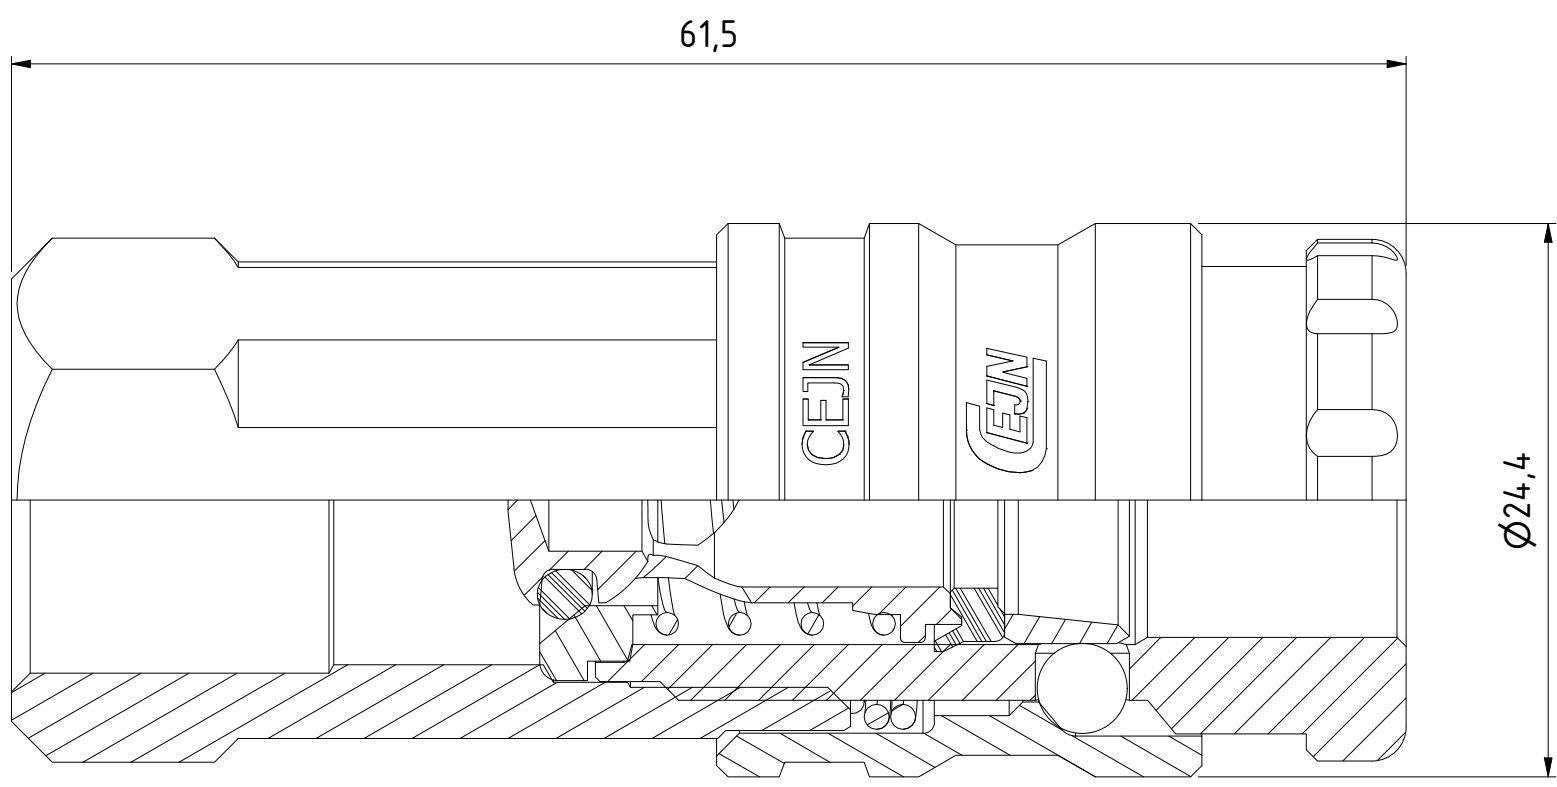

1 : 1



11	1	Locking sleeve	Brass, Ni5b			
10	1	Valve seat	Brass			
9	1	Spring	Stainless steel			
8	1	O-ring	NBR			
7	1	Valve	Brass			
6	1	Spring	Stainless steel			
5	1	Lip seal	NBR			
4	1	Ratchet sleeve	Stainless steel			
3	6	Ball	Acid proof steel			
2	1	Front part	Brass, Ni5b			
1	1	Back part	Brass, CuNi5b			
Item	Qty	Description			Material	
		Scale	Drawn	Checked	Appr.	ECO
		3 : 1	CABLHE	ANLA	JOOL	12561
		Drawing No.			Date	
		503411204			2019-08-08	
		Issue			Sheet	
		AC			1 /(1)	



Connection stroke

Product No.	103411204
Nominal flow Ø DN:	7.4 mm
Connection Stroke:	22.7 mm
Max WP Connected:	35 bar
Min BP Connected:	140 bar
Temperature range:	-30°C - +100°C
Connection:	G 3/8" Fem
Sealing material:	NBR
Hexagon:	20



Assembly Drawing 503411204