

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B



A

D

C


B

A

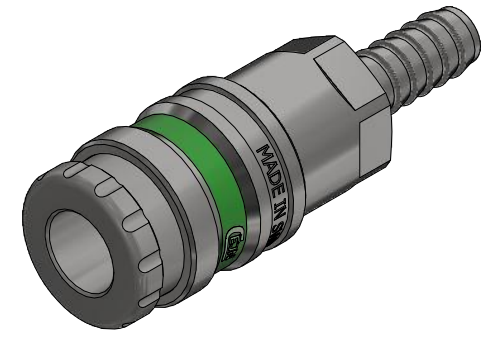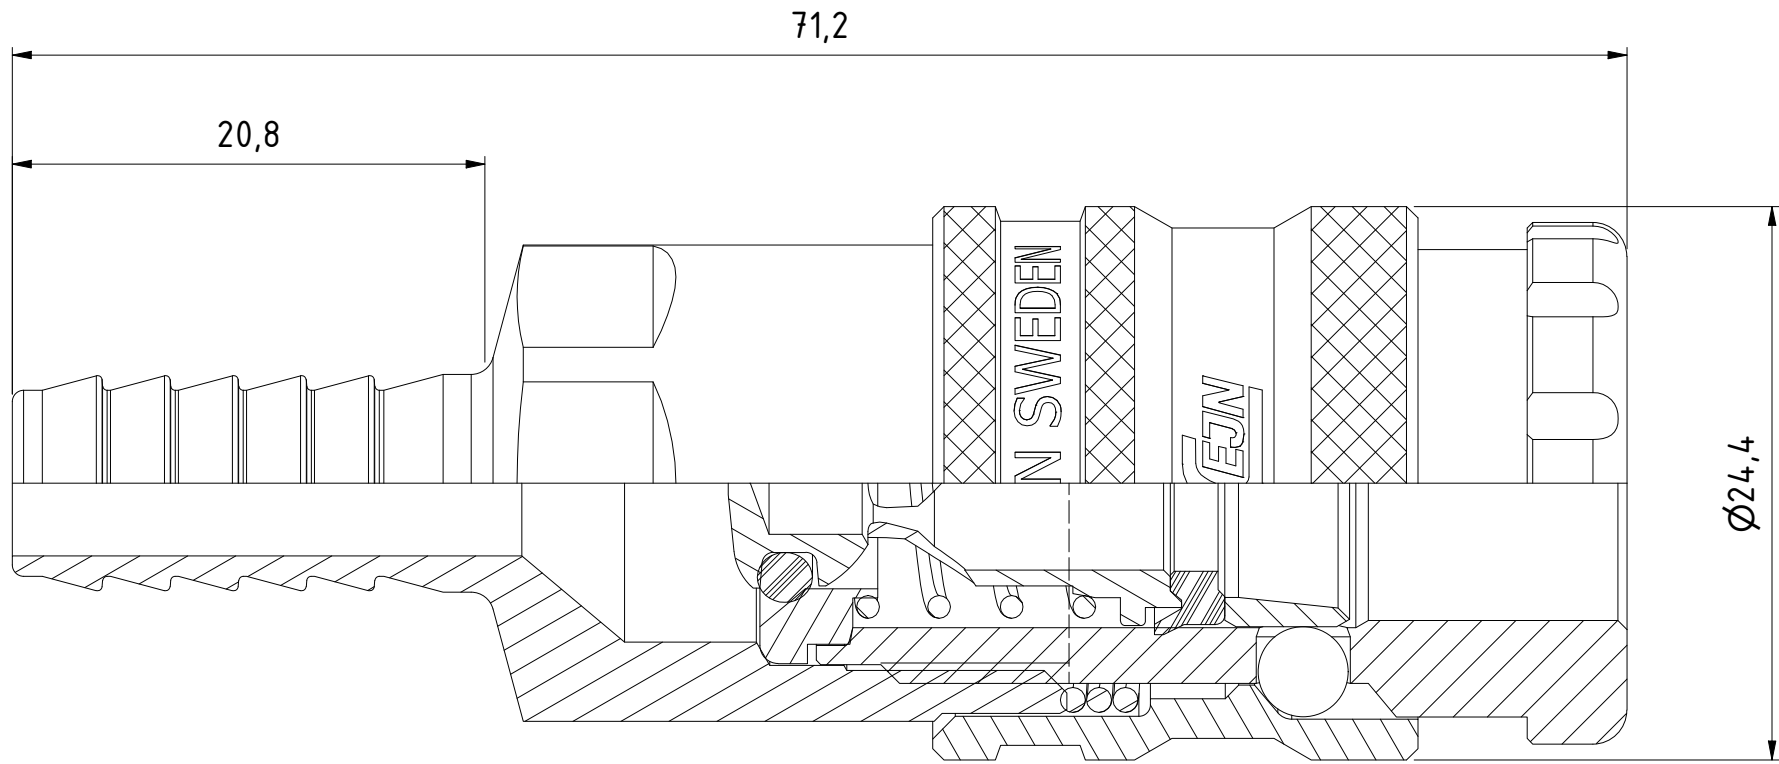

1 : 1

Product No. 103421003	
Nominal flow Ø DN:	6,4 mm
Connection Stroke:	22,7 mm
Max WP Connected:	35 bar
Min BP Connected:	140 bar
Temperature range:	-30°C - +100°C
Connection:	Hose 5/16" 8,0 mm
Sealing material:	NBR
Hexagon:	19

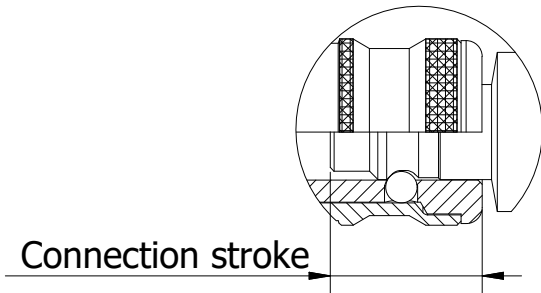

Connection stroke



11	1	Valve seat	Brass
10	1	Spring	Stainless steel
9	1	O-ring	NBR
8	1	Valve	Brass
7	1	Spring	Stainless steel
6	6	Ball	Stainless steel
5	1	Locking sleeve	Steel, Ni5b
4	1	Lip seal	NBR
3	1	Ratchet sleeve	Stainless steel
2	1	Front part	Steel, Chem. Ni.
1	1	Back part	Brass, Ni5b
Item	Qty	Description	Material
Scale		3 : 1	
Drawn		CABJOTU	
Checked		ANLA	
Appr.		JOOL	
ECO		000880	
Date		2021-12-02	
Drawing No.		503421003	
Issue		AE	
Sheet		1 /(1)	



Assembly Drawing 503421003