

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

A3

D

C

B


A

D


C

B


A

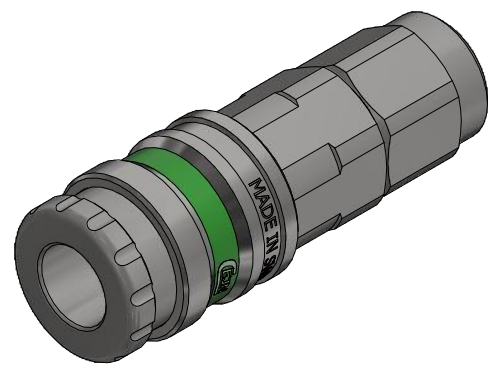

1 : 1

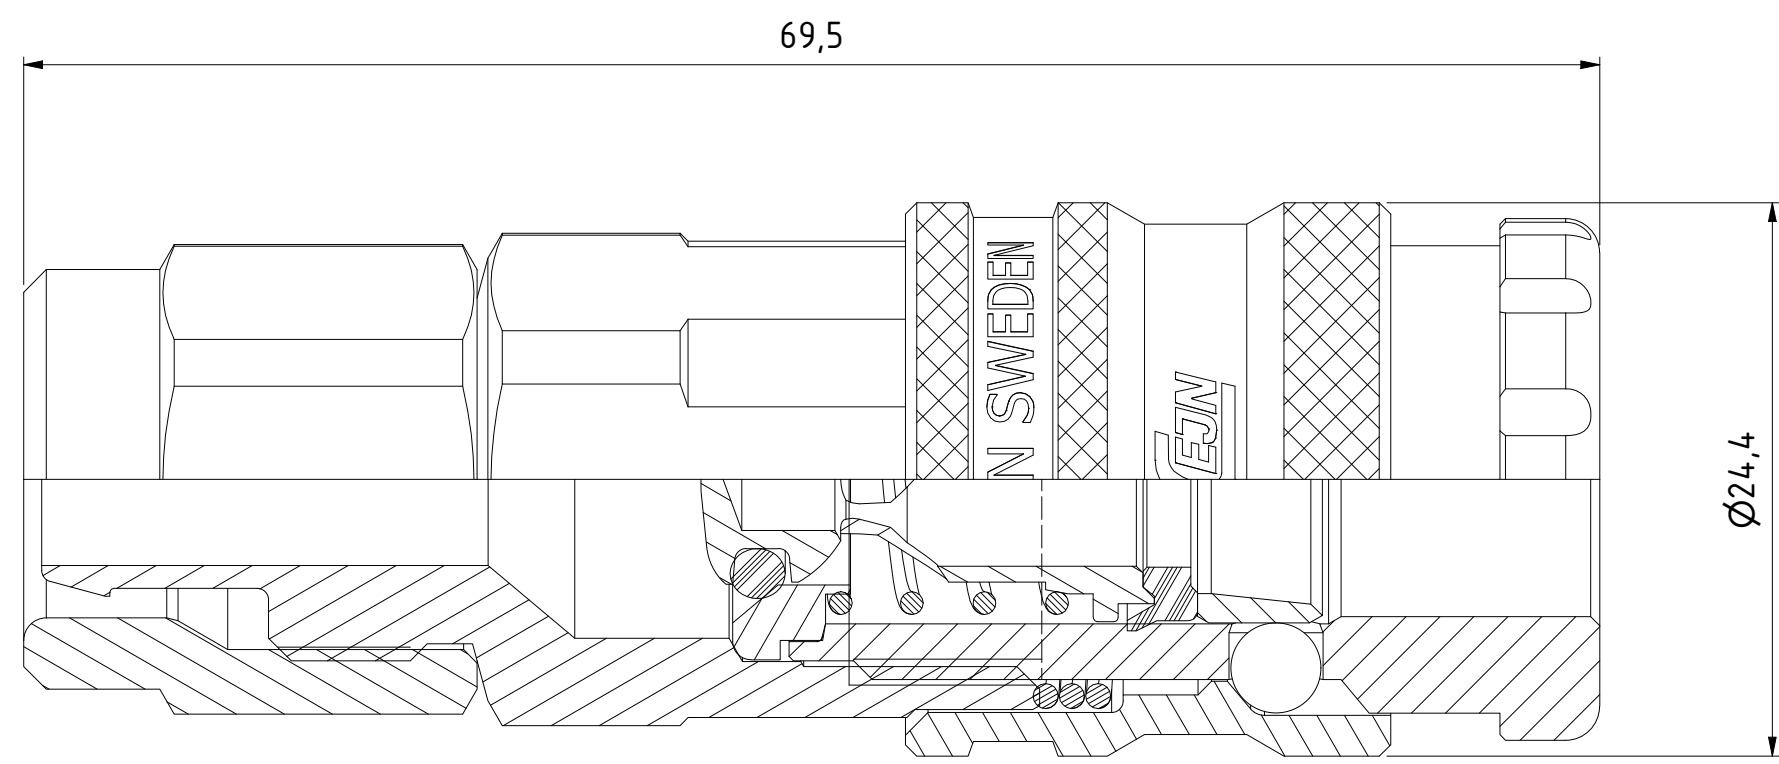

Product No. 103421062	
Nominal flow Ø DN:	7,4 mm
Connection Stroke:	22,7 mm
Max WP Connected:	16 bar w. CEJN braided PUR hose
Min BP Connected:	64 bar w. CEJN braided PUR hose
Temperature range:	-30°C - +100°C
Connection:	Stream-line 8,0x12,0
Sealing material:	NBR
Hexagon:	20/19

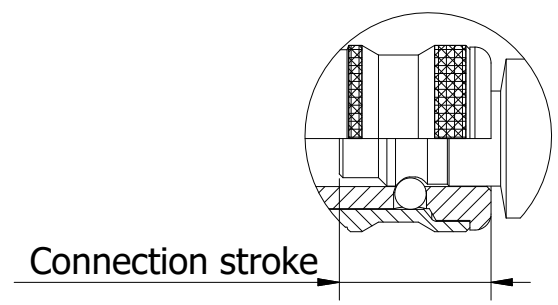

Connection stroke

AF

12	1	Valve seat	Brass
11	1	Spring	Stainless steel
10	1	O-ring	NBR
9	1	Valve	Brass
8	1	Spring	Stainless steel
7	6	Ball	Stainless steel
6	1	Locking sleeve	Steel, Ni5b
5	1	Lip seal	NBR
4	1	Ratchet sleeve	Stainless steel
3	1	Front part	Steel, Chem. Ni.
2	1	Swivel nut 8x12	Steel, Zn 8 Silver
1	1	Back part 8x12	Steel, Zn 8 Silver
Item	Qty	Description	Material
		Scale 3 : 1	Drawn CABJOTU
		Checked ANLA	Appr. JOOL
Assembly Drawing		ECO 000880	Date 2021-12-02
		Drawing No. 503421062	Issue AF Sheet 1 /(1)