

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A



B

C

D

6

Product No. 103421202	
Nominal flow Ø DN:	7,4 mm
Connection Stroke:	22,7 mm
Max WP Connected:	35 bar
Min BP Connected:	140 bar
Temperature range:	-30°C - +100°C
Connection:	G 1/4" Fem
Sealing material:	NBR
Hexagon:	20

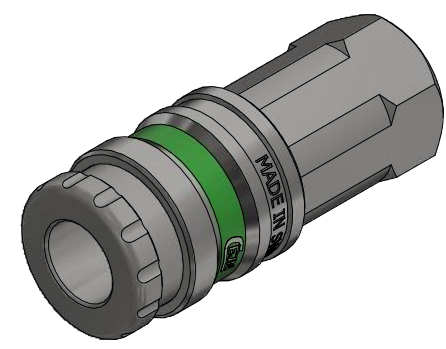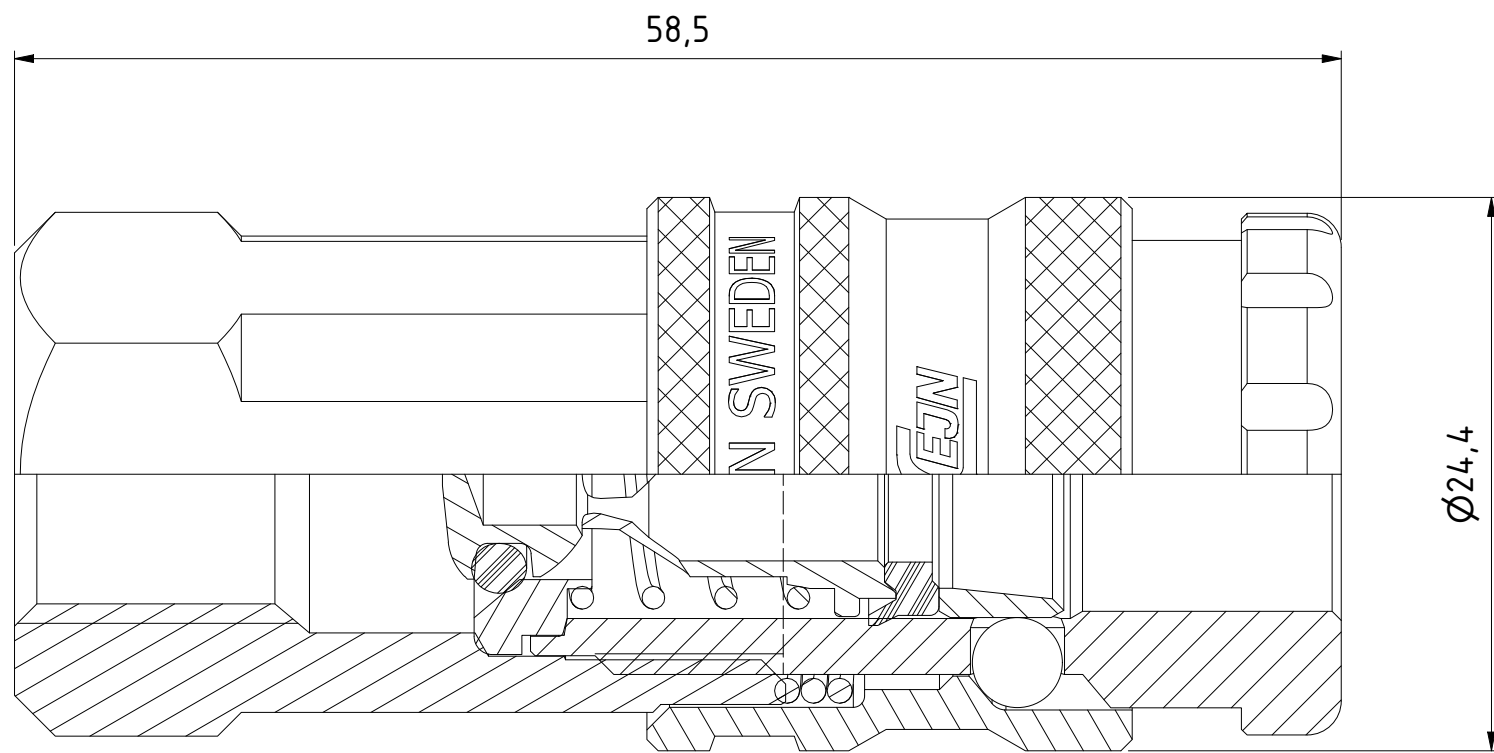

1 : 1

D


C

B

A

1

11	1	Valve seat	Brass
10	1	Spring	Stainless steel
9	1	O-ring	NBR
8	1	Valve	Brass
7	1	Spring	Stainless steel
6	6	Ball	Stainless steel
5	1	Locking sleeve	Steel, Ni5b
4	1	Lip seal	NBR
3	1	Ratchet sleeve	Stainless steel
2	1	Front part	Steel, Chem. Ni.
1	1	Back part	Brass, Ni5b
Item	Qty	Description	Material
		Scale 3 : 1	Drawn CABJOTU
		Checked ANLA	Appr. JOOL
		ECO 000880	Date 2021-12-03
		Drawing No. 503421202	Issue AE
			Sheet 1 /(1)



Connection stroke



Assembly Drawing 503421202