

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D



C

B

A

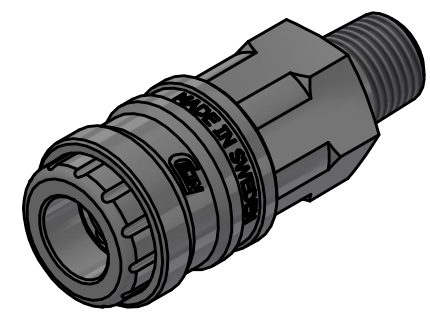

1 : 1

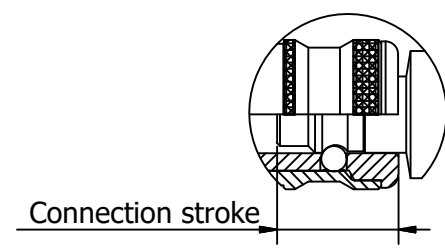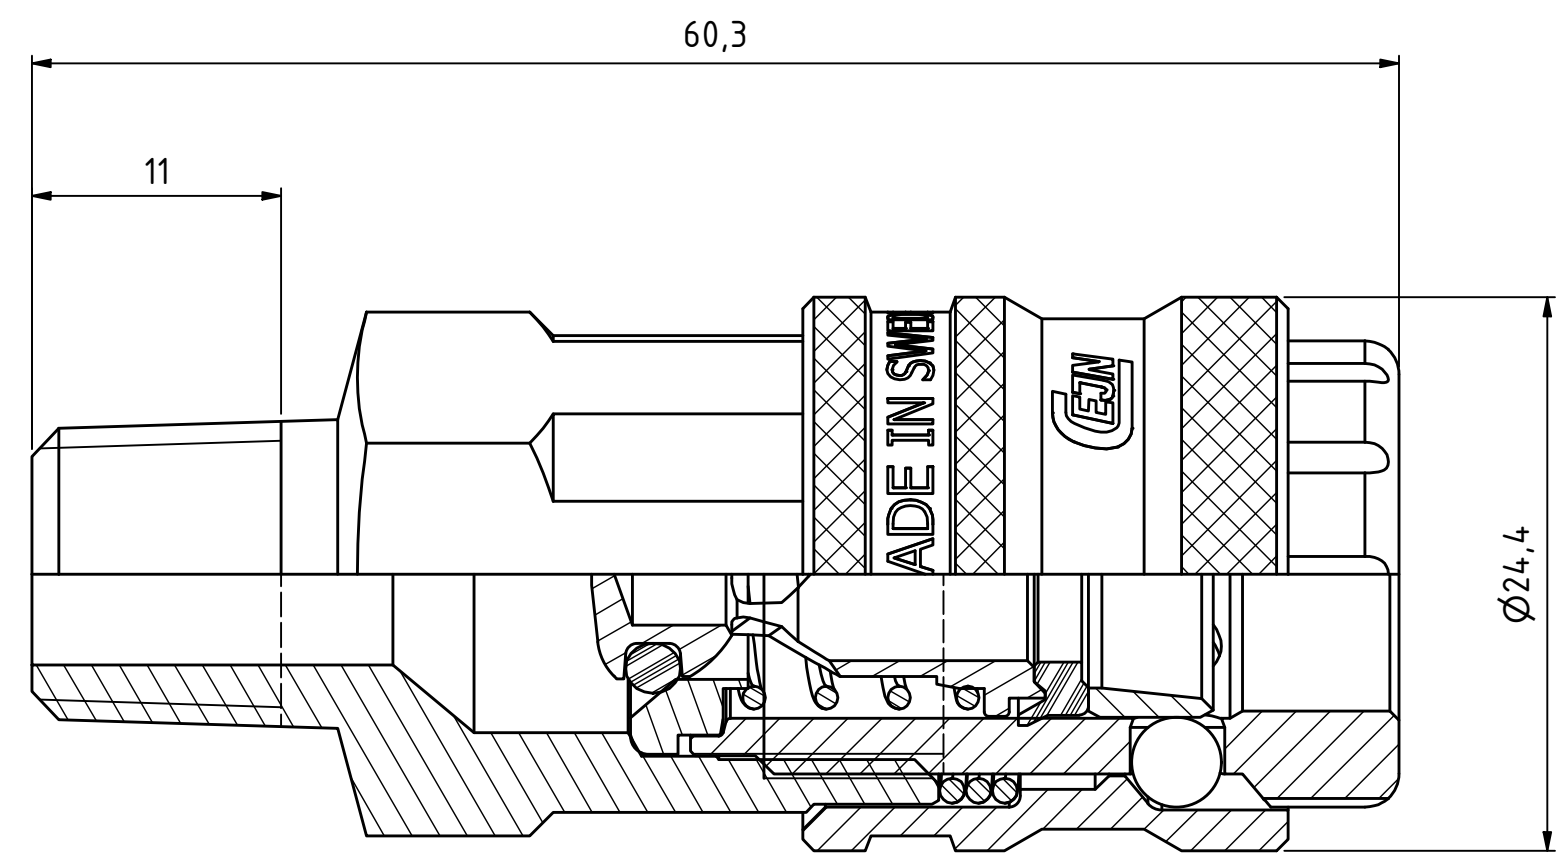

Connection stroke

Product No. 103441152	
Nominal flow Ø DN:	7,4 mm
Connection Stroke:	18,2 mm
Max WP Connected:	35 bar
Min BP Connected:	140 bar
Temperature range:	-40°C - +100°C
Connection:	R 1/4" Male
Sealing material:	NBR Polar
Hexagon:	20

AD	11	1	Lip seal	NBR-polar											
	10	1	O-ring	NBR-polar											
	9	6	Ball	Acid proof steel											
	8	1	Back part	Brass, plated											
	7	1	Spring	Stainless steel											
	6	1	Locking sleeve	Brass, plated											
	5	1	Spring	Stainless steel											
	4	1	Valve	Brass											
	3	1	Valve seat	Brass											
	2	1	Ratchet sleeve	Stainless steel											
	1	1	Front part	Brass, plated											
Item	Qty	Description		Material											
	Scale	3 : 1	Drawn	CABANLA	Checked	LIJA	Appr.	JOOL	ECO	001566	Date	2023-03-28			
	Assembly Drawing					Drawing No.					503441152	Issue	AD	Sheet	1 /(1)