

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D


C

B


A

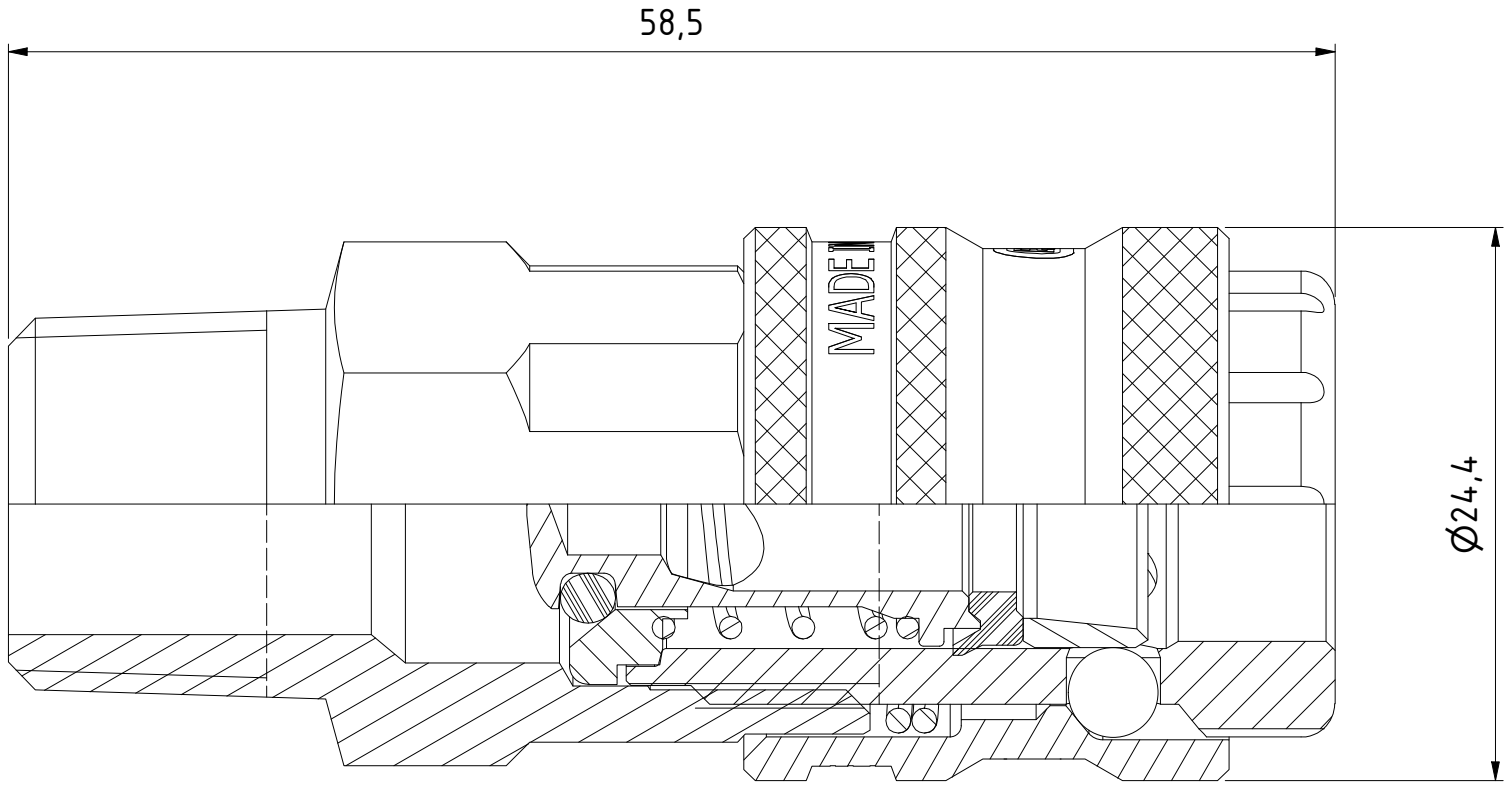

1 : 1



11	1	Lip seal	NBR-polar			
10	1	O-ring	NBR-polar			
9	1	Locking sleeve	Brass, plated			
8	1	Spring	Stainless steel			
7	6	Ball	Acid proof steel			
6	1	Ratchet sleeve	Stainless steel			
5	1	Spring	Stainless steel			
4	1	Valve	Brass			
3	1	Valve seat	Brass			
2	1	Front part	Brass, plated			
1	1	Back part	Brass, plated			
Item	Qty	Description		Material		
		Scale	Drawn	Checked	Appr.	ECO
		3 : 1	CABLHE	ANLA	JOOL	001581
		Drawing No.			Date	
		103441154			2023-04-15	
		Issue			Sheet	
		A			1 /(1)	



Connection stroke

Product No.	103441154
Nominal flow Ø DN:	7,4 mm
Connection Stroke:	18,2 mm
Max WP Connected:	35 bar
Min BP Connected:	140 bar
Temperature range:	-40°C - +100°C
Connection:	R 3/8" Male
Sealing material:	NBR Polar
Hexagon:	20

