
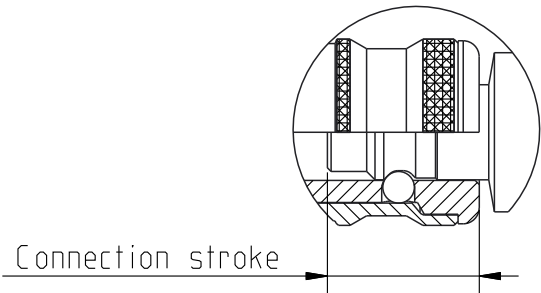


Product no: 10_344_1202		
Max working pressure:	35	bar connected
	35	bar disconnected
Min burst pressure:	140	bar connected
	140	bar disconnected
Sealing material:	NBR	
Temperatur range:	-30��C - +100 ��C	
Nominal flow diameter,DN:	7,4	mm
Connection	G 1/4" Fem	
Connection stroke:	18,2	mm

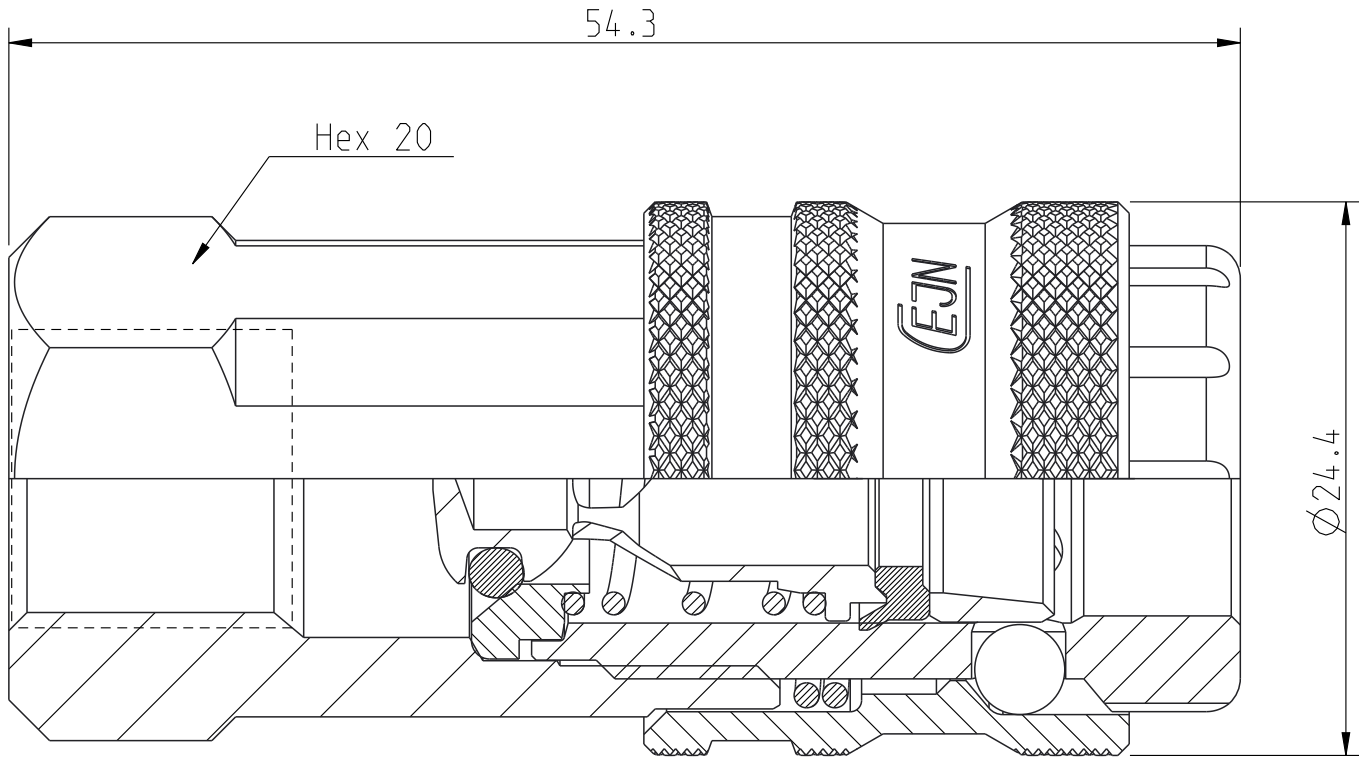

AC

AC

11	1	Front part	Brass, Ni5b
10	1	Ratchet sleeve	Stainless steel
9	1	Spring	Stainless steel
8	1	Locking sleeve	Brass, Ni5b
7	1	Valve seat	Brass
6	1	Valve	Brass
5	1	Back part	Brass, Ni5b
4	1	Lip seal	EPDM
3	1	Spring	Stainless steel
2	1	O-ring	NBR
1	6	Ball	Acid proof steel
Detalj Item	Antal Quant.	Ben��mning Description	Material Material

	Skala Scale	3:1	Ritad Drawn	EMPE01	Kontr. Checked	PGU	Godk. Appr.	J00L	��m nr. Alt. no.	8943	Dat. Date	16-07-04
	Assembly drawing							Ritning nr/Drawing No.			Utg./Issue	
							50_344_1202			AC		



1:1