

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C

B

A



D

C


B

A

Product No. 103441288	
Nominal flow Ø DN:	7 mm
Connection Stroke:	18,2 mm
Max WP Connected:	35 bar
Min BP Connected:	140 bar
Temperature range:	-30°C - +100°C
Connection:	G 1/4" Male
Sealing material:	NBR
Hexagon:	20

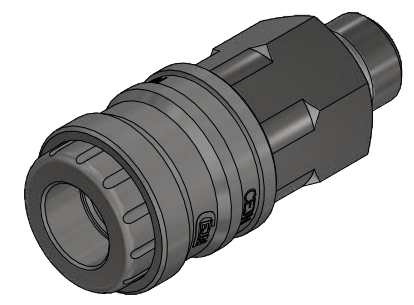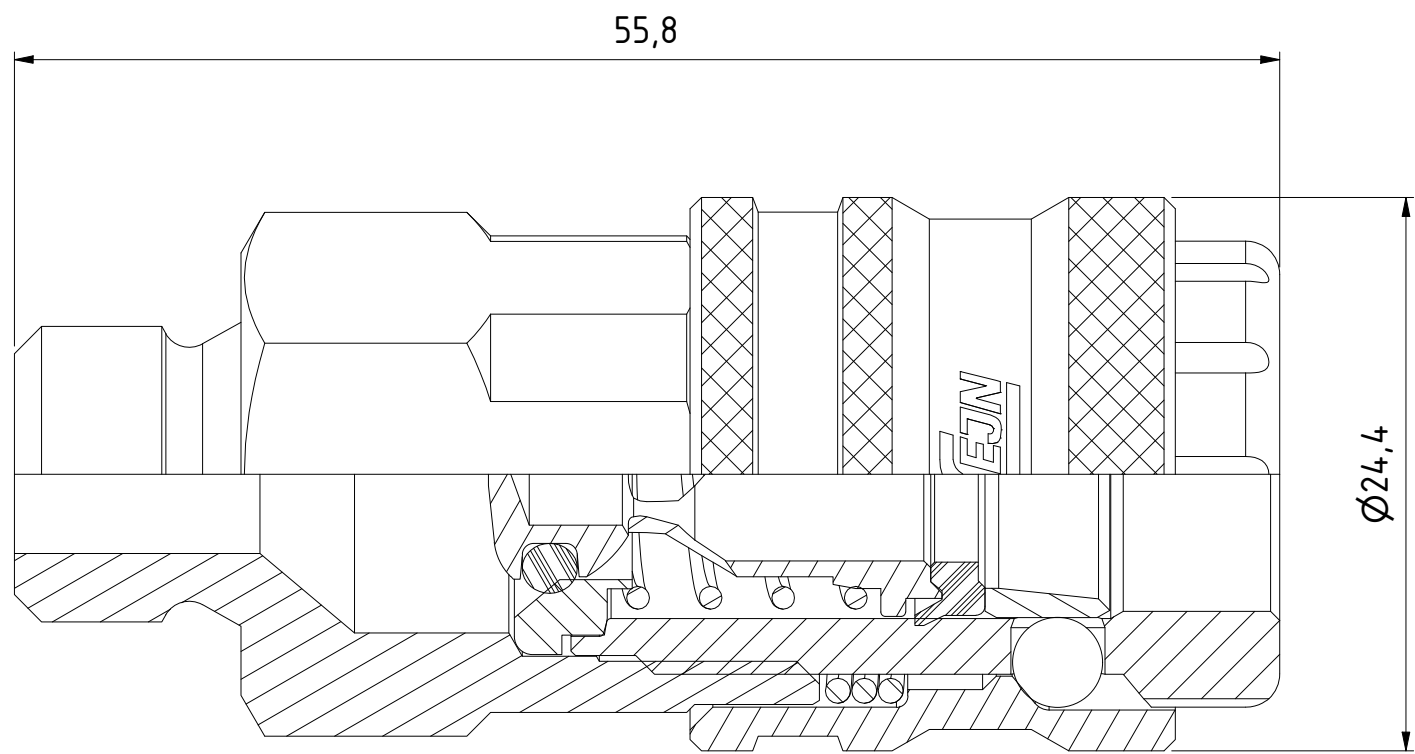

1 : 1

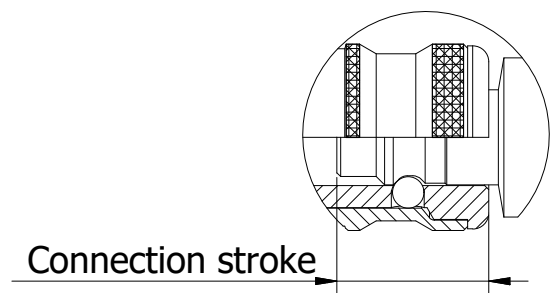

11	1	Back part	Brass, Ni5b
10	1	Locking sleeve	Brass, Ni5b
9	1	Spring	Stainless steel
8	6	Ball	Acid proof steel
7	1	Lip seal	NBR
6	1	Ratchet sleeve	Stainless steel
5	1	Spring	Stainless steel
4	1	O-ring	NBR
3	1	Valve	Brass
2	1	Valve seat	Brass
1	1	Front part	Brass, Ni5b
Item	Qty	Description	Material
	Scale	Drawn	Checked
	3 : 1	CABLHE	ANLA
			Appr.
			JOOL
		ECO	12561
		Date	2019-08-06
Assembly Drawing		Drawing No.	503441288
		Issue	AC
		Sheet	1 /(1)