

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C

B



A

D



C

B

A

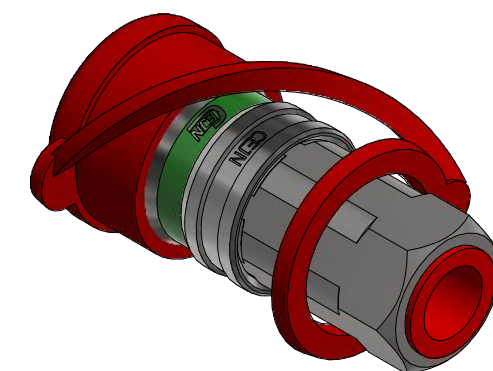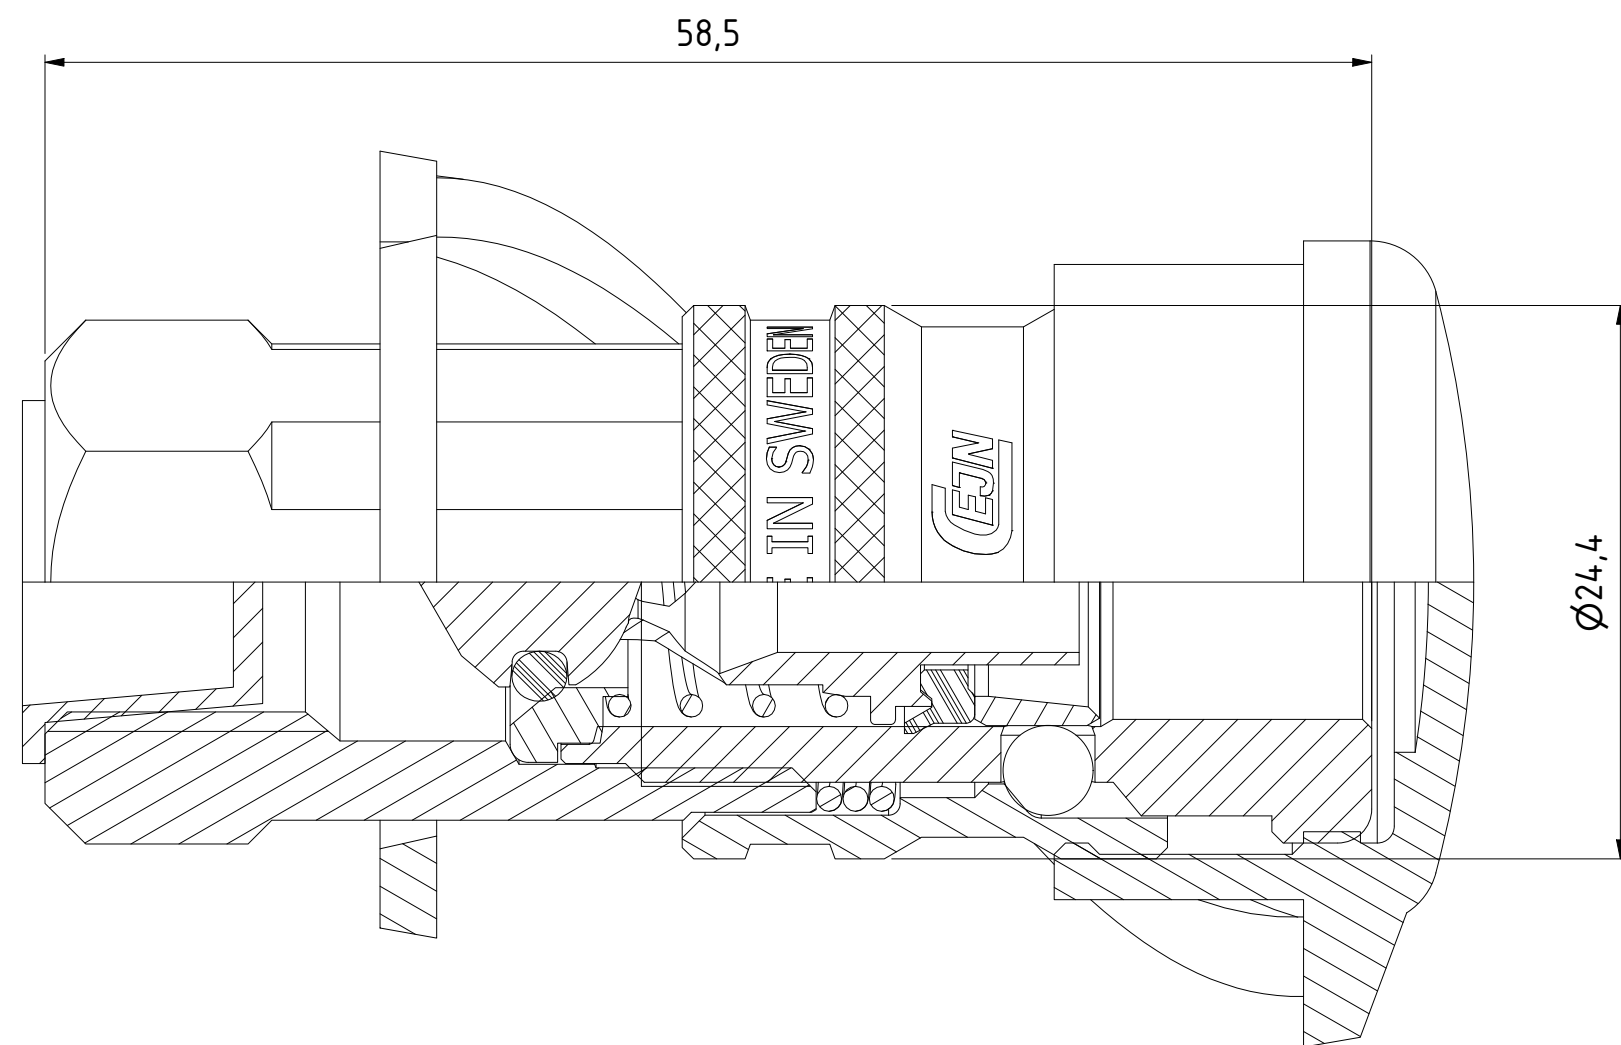

1 : 1

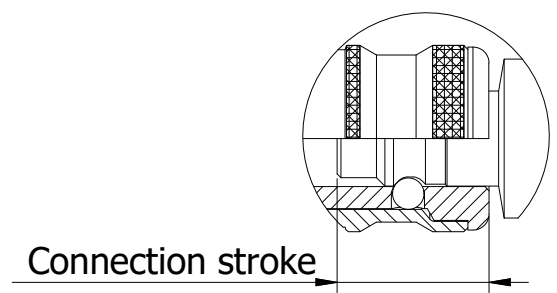

Product No. 103451202	
Nominal flow Ø DN:	6.2 mm
Connection Stroke:	22.7 mm
Max WP Connected:	35 bar
Min BP Connected:	140 bar
Temperature range:	-30°C - +100°C
Connection:	G 1/4" female
Sealing material:	NBR
Hexagon:	20

13	1	Valve	Brass			
12	1	Valve seat	Brass			
11	1	Spring	Stainless steel			
10	1	O-ring	NBR			
9	1	Locking sleeve	Brass, Ni5b			
8	1	Spring	Stainless steel			
7	1	Lip seal	NBR			
6	1	Ratchet sleeve	Stainless steel			
5	6	Ball	Acid proof steel			
4	1	Front part	Brass, Ni5b			
3	1	Thread protection	Plastic			
2	1	Dust cap	PVC, Red			
1	1	Back part	Brass, Ni5b			
Item	Qty	Description	Material			
	Scale	Drawn	Checked	Appr.	ECO	Date
	3 : 1	CABLHE	ANLA	JOOL	12561	2019-08-28
Assembly Drawing		Drawing No.			Issue	Sheet
503451202					AC	1 /(1)