

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B



A

D



C

B

A

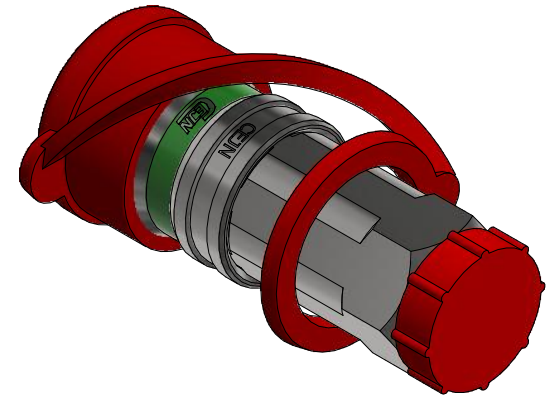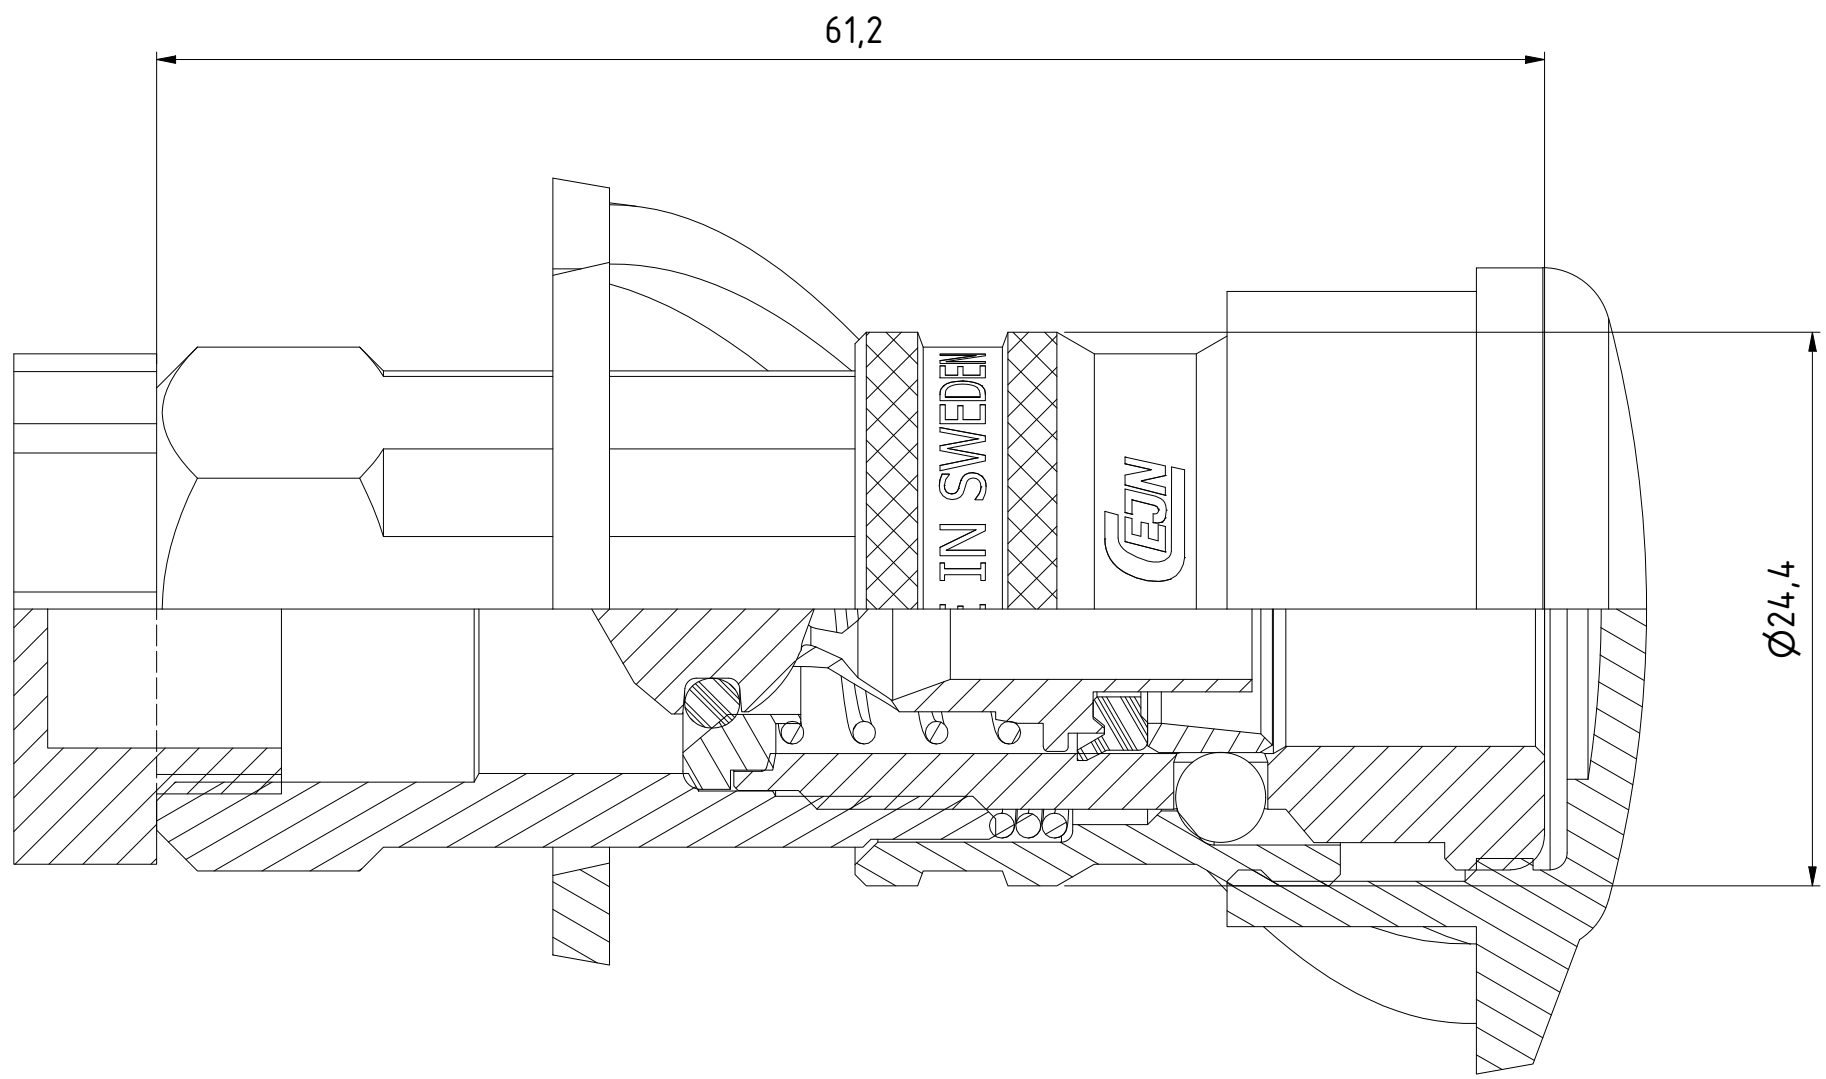

1 : 1



Connection stroke

Product No.	103451204
Nominal flow Ø DN:	6.2 mm
Connection Stroke:	22.7 mm
Max WP Connected:	35 bar
Min BP Connected:	140 bar
Temperature range:	-30°C - +100°C
Connection:	G 3/8" Fem
Sealing material:	NBR
Hexagon:	22

13	1	Valve	Brass
12	1	Valve seat	Brass
11	1	Spring	Stainless steel
10	1	O-ring	NBR
9	1	Locking sleeve	Brass, Ni5b
8	1	Spring	Stainless steel
7	1	Lip seal	NBR
6	1	Ratchet sleeve	Stainless steel
5	6	Ball	Acid proof steel
4	1	Front part	Brass, Ni5b
3	1	Thread Protection	Plastic
2	1	Dust cap	PVC, Red
1	1	Back part	Brass, Ni5b
Item	Qty	Description	Material
		Scale 3 : 1	Drawn CABLHE
		Checked ANLA	Appr. JOOL
		ECO 12561	Date 2019-08-28
		Drawing No.	Issue
		Sheet	1 / (1)
		AC	



Assembly Drawing 503451204