

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©






D


C

B

A

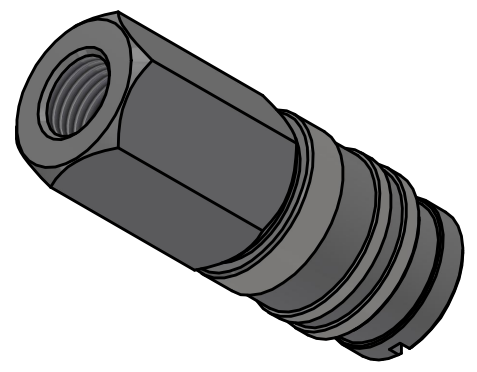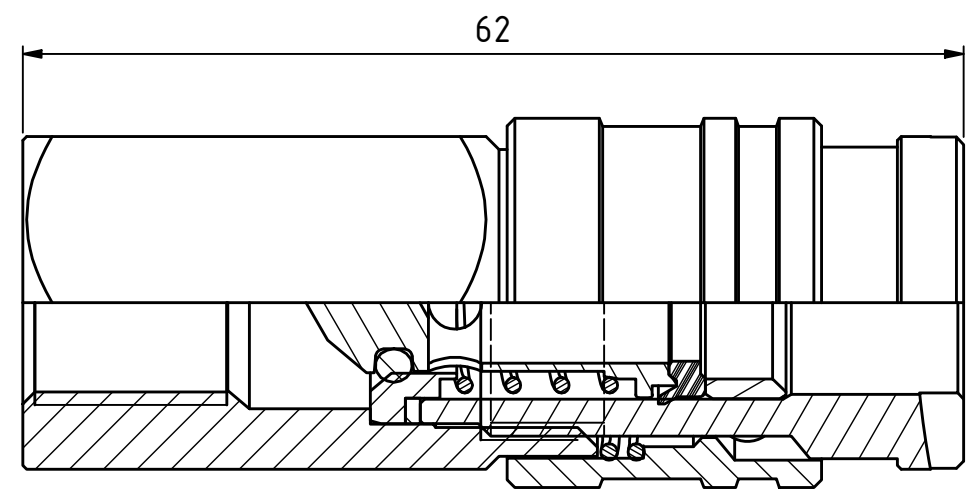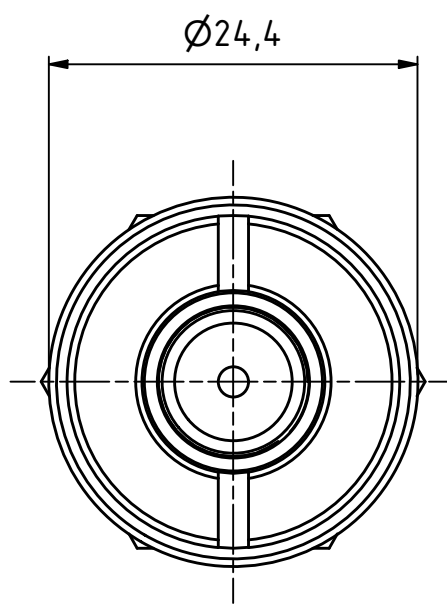

1 : 1



Connection stroke

Product No. 103461202	
Nominal flow Ø DN:	7.4 mm
Connection Stroke:	22.7 mm
Max WP Connected:	35 bar
Min BP Connected:	140 bar
Temperature range:	-30°C - +100°C
Connection:	G 1/4" Fem
Sealing material:	NBR
Hexagon:	22

12	1	Back part	Acid-proof steel	
11	6	Ball	Acid proof steel	
10	1	Ratchet sleeve	Acid-proof steel	
9	1	Valve	Stainless, Acid Proof	
8	1	Front part	Stainless, Acid Proof	
7	1	Locking sleeve	Stainless, Acid Proof	
6	1	Spring	Stainless steel	
5	1	O-ring	NBR	
4	1	Spring	Stainless steel	
3	1	Lip seal	NBR	
2	1	Flat Seal	PA	
1	1	Valve seat	Acid-proof steel	
Item	Qty	Description	Material	
State Production		Drawn CABALAL	Checked LIJA	Approved JOOL
		ECO		Date 2024-08-07
		Former No.		Scale 2 : 1
		Drawing No. 103461202		Issue A
				Sheet 1 /(1)



Coupling G 1/4" fem NBR