

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©






D


C

B

A

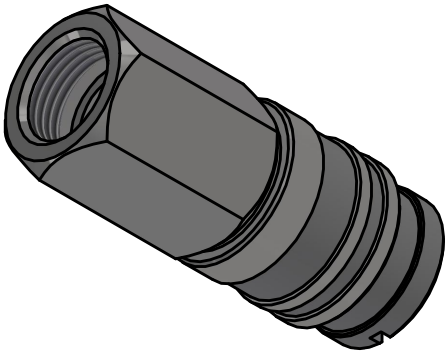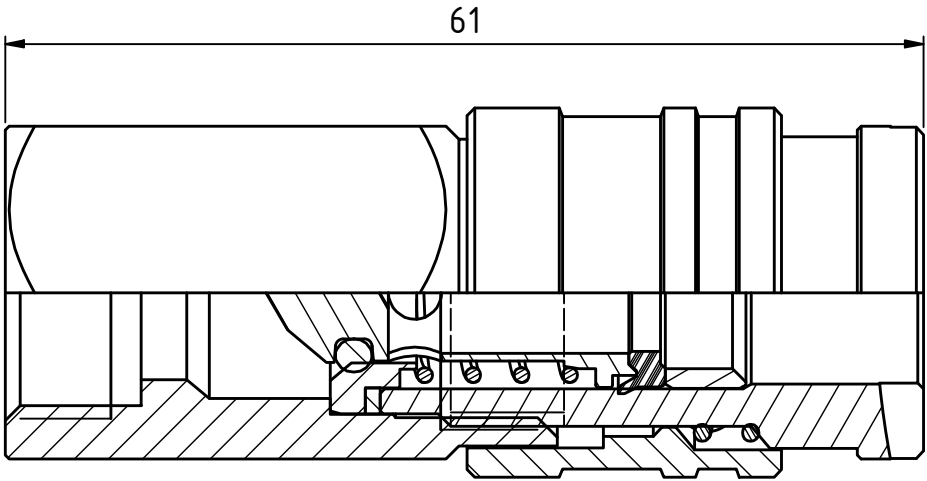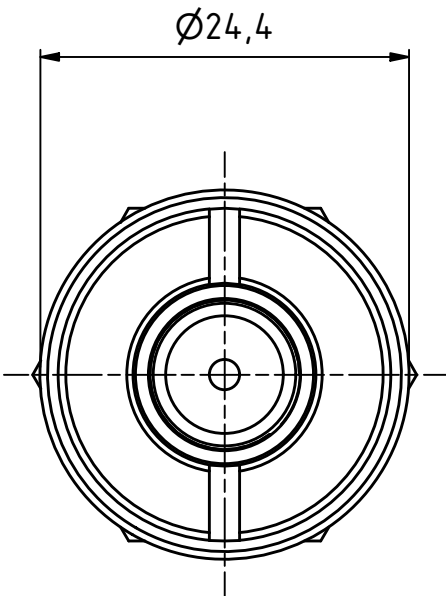

1 : 1



Product No. 103461234	
Nominal flow Ø DN:	7.4 mm
Connection Stroke:	22.7 mm
Max WP Connected:	35 bar
Min BP Connected:	140 bar
Temperature range:	-30°C - +100°C
Connection:	G 3/8" Fem
Sealing material:	NBR
Hexagon:	22

12	1	Back part G 3/8"	Acid-proof steel
11	6	Ball	Acid proof steel
10	1	Ratchet sleeve	Acid-proof steel
9	1	Valve	Stainless, Acid Proof
8	1	Front part	Stainless, Acid Proof
7	1	Locking sleeve	Stainless, Acid Proof
6	1	Spring	Stainless steel
5	1	O-ring	NBR
4	1	Spring	Stainless steel
3	1	Lip seal	NBR
2	1	Flat Seal	PA
1	1	Valve seat	Acid-proof steel
Item	Qty	Description	Material
State Production		Drawn CABALAL	Checked LIJA
		Approved JOOL	Date 2024-08-07
		ECO	Former No.
		Drawing No. 103461234	Scale 2 : 1
		Issue A	Sheet 1 /(1)

D

C

B

A