

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D


C

B

A

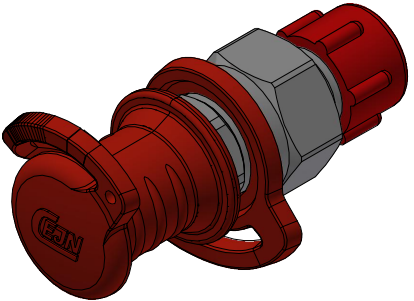

1 : 1

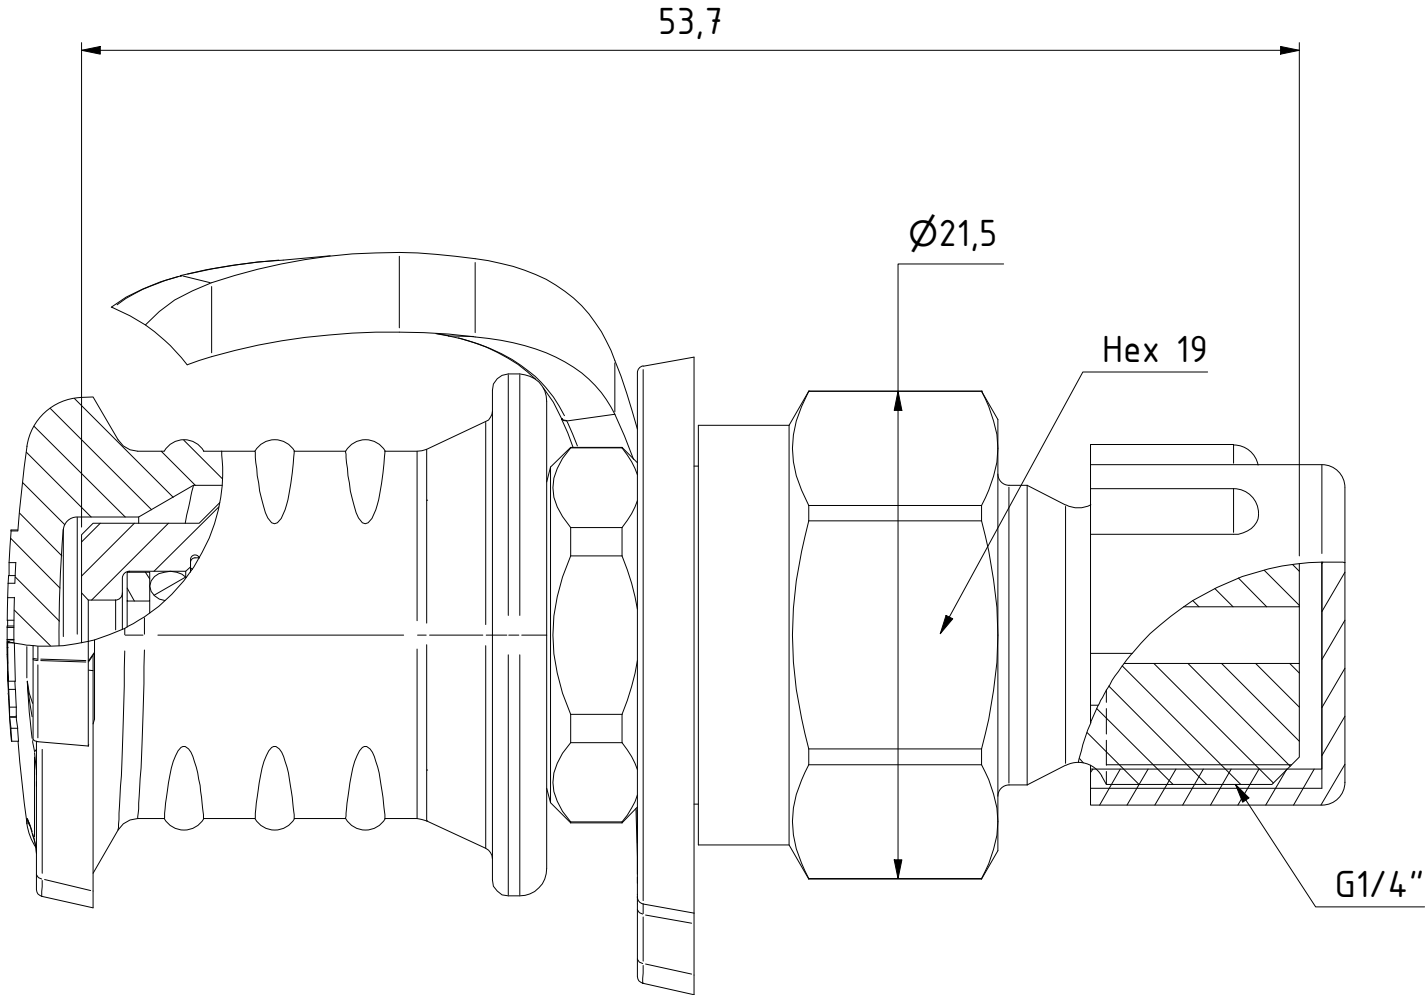

|                       |                |
|-----------------------|----------------|
| Product No. 103586282 |                |
| Nominal flow Ø DN:    | 1.5 mm         |
| Connection Stroke:    | 16.9 mm        |
| Max WP Connected:     | 600 bar        |
| Max WP Disconnected:  | 600 bar        |
| Min BP Connected:     | 1300 bar       |
| Min BP Disconnected:  | 2400 bar       |
| Temperature range:    | -30°C - +100°C |
| Connection:           | G 1/4" Male    |
| Body material:        | Plated steel   |
| Sealing material:     | NBR            |
| Hexagon:              | 19             |



|                                                  |                 |                          |                    |                   |
|--------------------------------------------------|-----------------|--------------------------|--------------------|-------------------|
| Drawn<br>FH                                      | Checked<br>PESV | Approved<br>JOER         | Date<br>2025-10-03 |                   |
| Nipple G 1/4" male NBR - for<br>Tredo connection |                 | Former No.               | Scale<br>3 : 1     | Sheet<br>1 / (1 ) |
|                                                  |                 | Drawing No.<br>103586282 |                    | Issue<br>C        |