


Product no: 10_365_1215		
Max working pressure:	400	bar connected
	400	bar disconnected
Min burst pressure:	1200	bar connected
	1200	bar disconnected
Sealing material:	FPM	
Temperatur range:	-20°C - 205 °C	
Nominal flow diameter,DN:	10	mm
Connection	G 1/2'' Fem	
Connection stroke:	15.6	mm

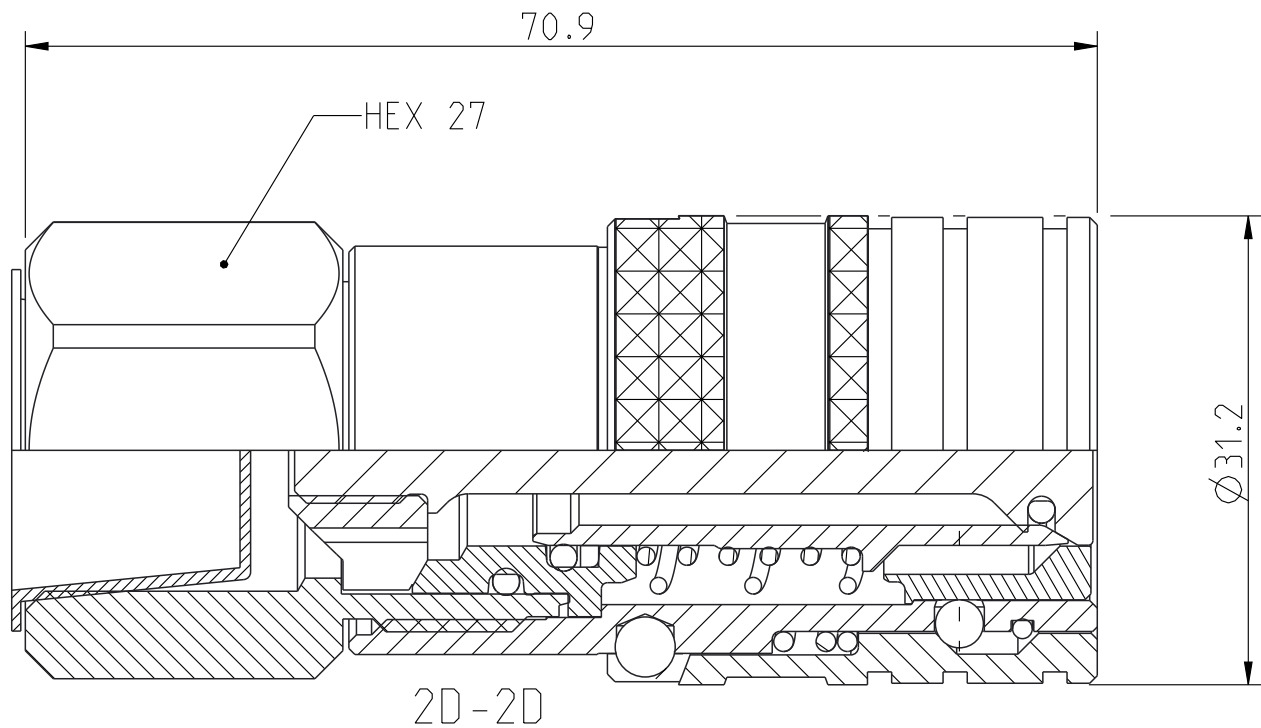

1:1

19	1	Wire coil	Stainless steel
18	1	Valve stop	Steel, Plated
17	1	Valve sleeve	Steel, Zi-Ni 9 T
16	1	Valve seat	Steel, Plated
15	1	Valve opener	Steel, Plated
14	1	Thread protection	Plastic
13	1	Spring	Stainless steel
12	1	Spring	Stainless steel
11	1	Spring	Stainless steel
10	1	Ratchet sleeve	Steel, Zn-Ni 9 T
9	1	O-ring	FPM
8	1	O-ring	FPM
7	1	O-ring	FPM
6	1	Locking sleeve	Steel, Zi-Ni 10 black
5	1	Front part	Steel, Zn-Ni 9 transp
4	12	Ball	Stainless steel
3	1	Ball	Stainless steel
2	1	Backup ring	PTFE
1	1	Back part	Steel, Zn-Ni 9 T
Detalj Item	Antal Quant.	Benämning Description	Material Material

	Skala Scale	2:1	Ritad Drawn	CABPEOD	Kontr. Checked	MBa	Godk. Appr.	PMB	Äm nr. Alt. no.	-	Dat. Date	12-11-27
	Assembly drawing							Ritning nr/Drawing No.		50_365_1215		Utg./Issue