



Product no: 10_365_1284		
Max working pressure:	400	bar connected
	400	bar disconnected
Min burst pressure:	1200	bar connected
	1200	bar disconnected
Sealing material:	NBR	
Temperatur range:	-30��C - 100 ��C	
Nominal flow diameter,DN:	10	mm
Connection	G 3/8'' Fem	
Connection stroke:	15.6	mm

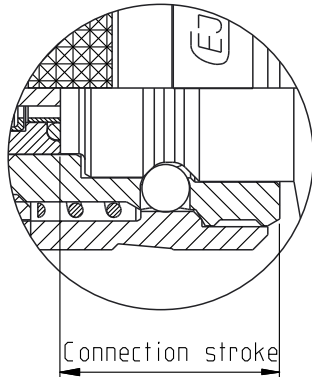

18	1	Wire coil	Stainless steel
17	1	Valve stop	Steel, Plated
16	1	Valve sleeve	Steel, Zn 8 Silver
15	1	Valve seat	Steel, Plated
14	1	Valve opener	Steel, Zn-Ni transp.
13	1	Thread protection	Plastic
12	1	Spring	Stainless steel
11	1	Spring	Stainless steel
10	1	Spring	Stainless steel
9	1	Ratchet sleeve	Steel, Zn-Ni 9 T
8	1	O-ring	NBR
7	1	O-ring	NBR
6	1	O Ring	NBR
5	1	Locking sleeve	Steel, Zn-Ni 10 black
4	2	Locking ring	SGA 31
3	1	Front part	Steel, Zn-Ni 9 transp
2	1	Backup ring	Hytrel
1	1	Back part	Steel, Zi-Ni 9 transp

Detalj Item	Antal Quant.	Ben��mning Description	Material Material	
Skala Scale	5:2	Rit��d Drawn	JoEr	Kontr. Checked
Godk. Appr.	��	��	��	��
AM nr. Alt. no.	��	��	��	��
Dat. Date	120529	Ritning nr/Drawing No.		Utg./Issue
Assembly drawing			50_365_1284	AA

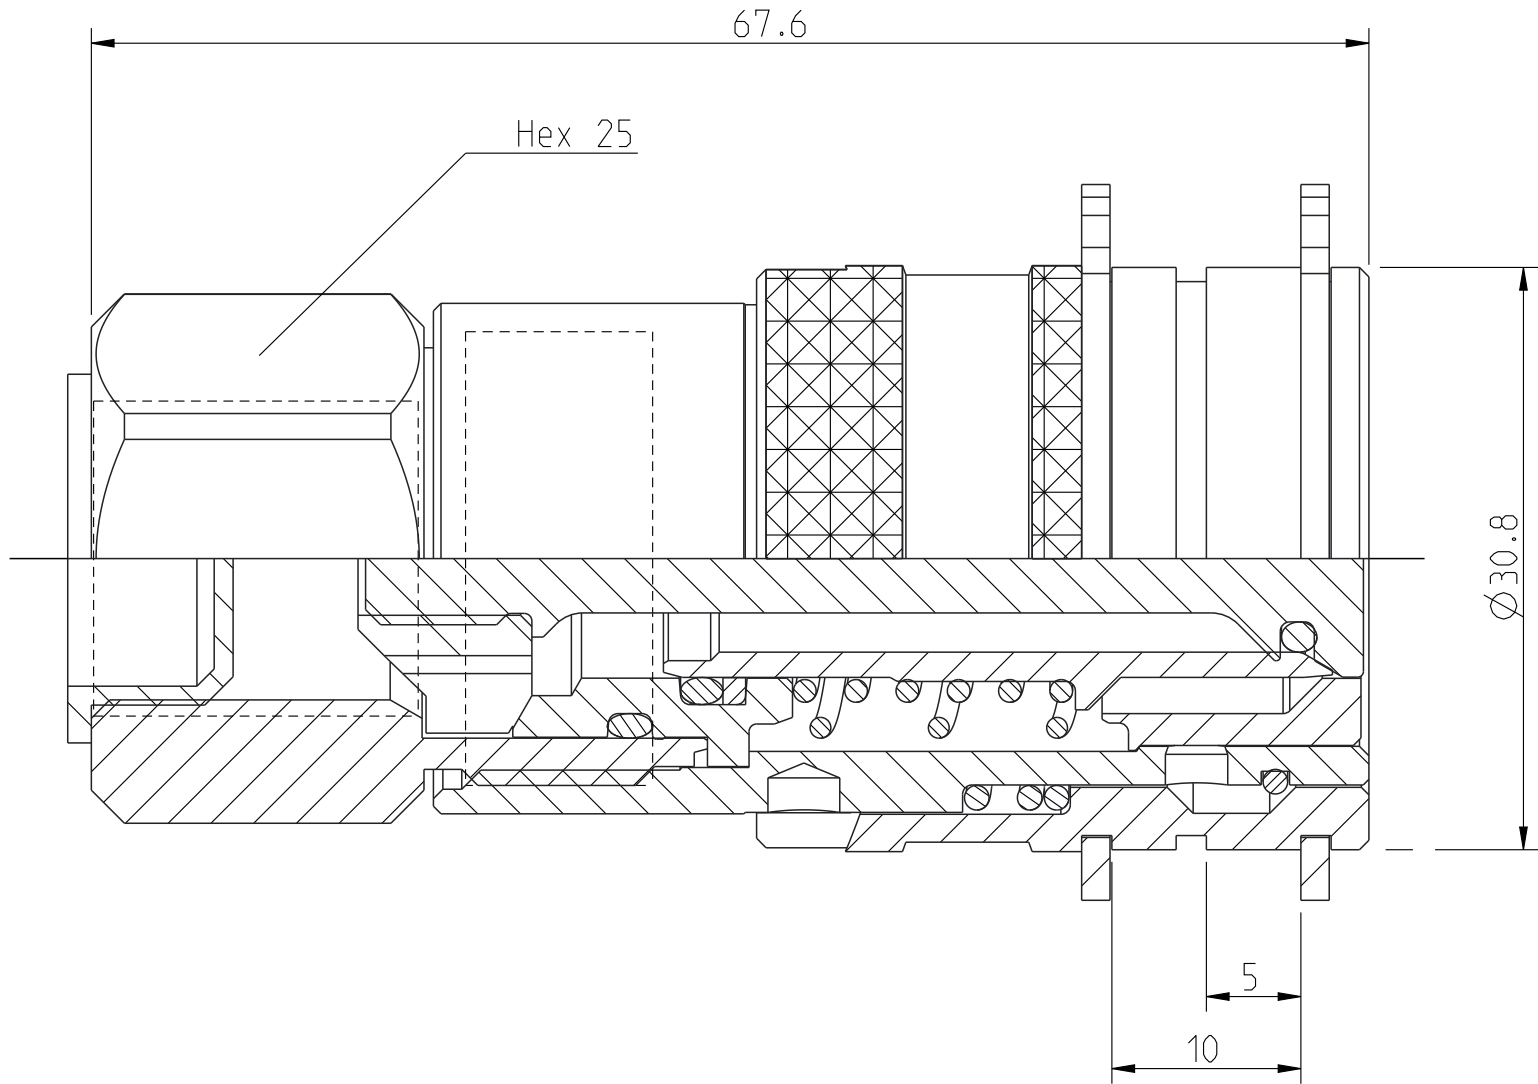