
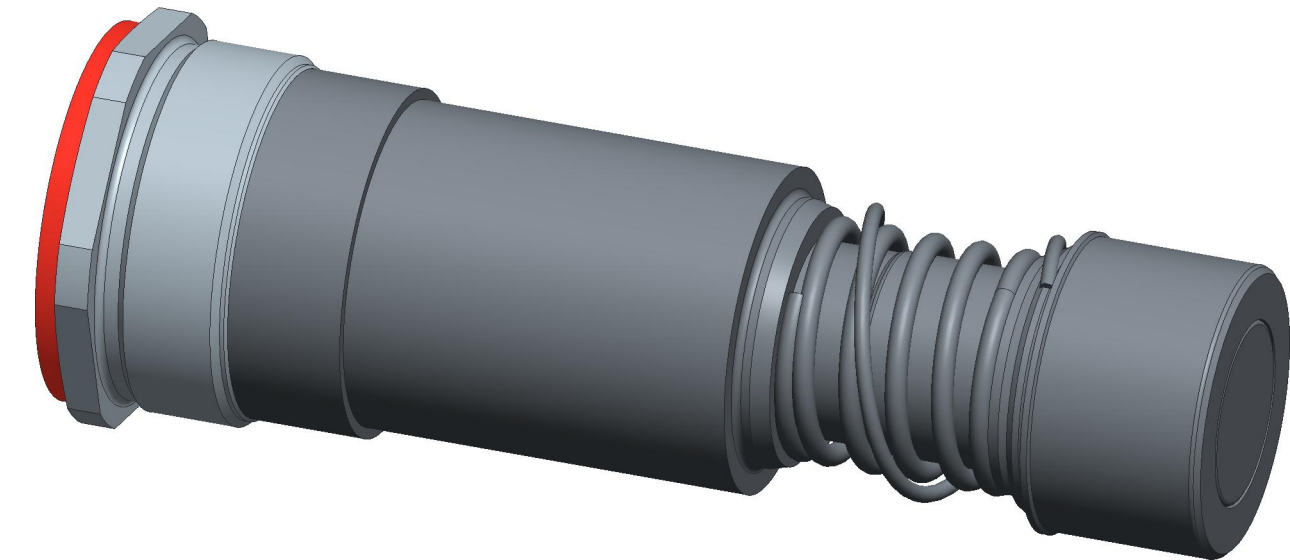


Product no: 10_365_1905		
Max working pressure:	350	bar connected
	350	bar disconnected
Min burst pressure:	1200	bar connected
	1200	bar disconnected
Sealing material:	NBR	
Temperatur range:	-30°C - +100 °C	
Nominal flow diameter,DN:	10	mm
Connection	WEO 1/2"	
Connection stroke:	mm	

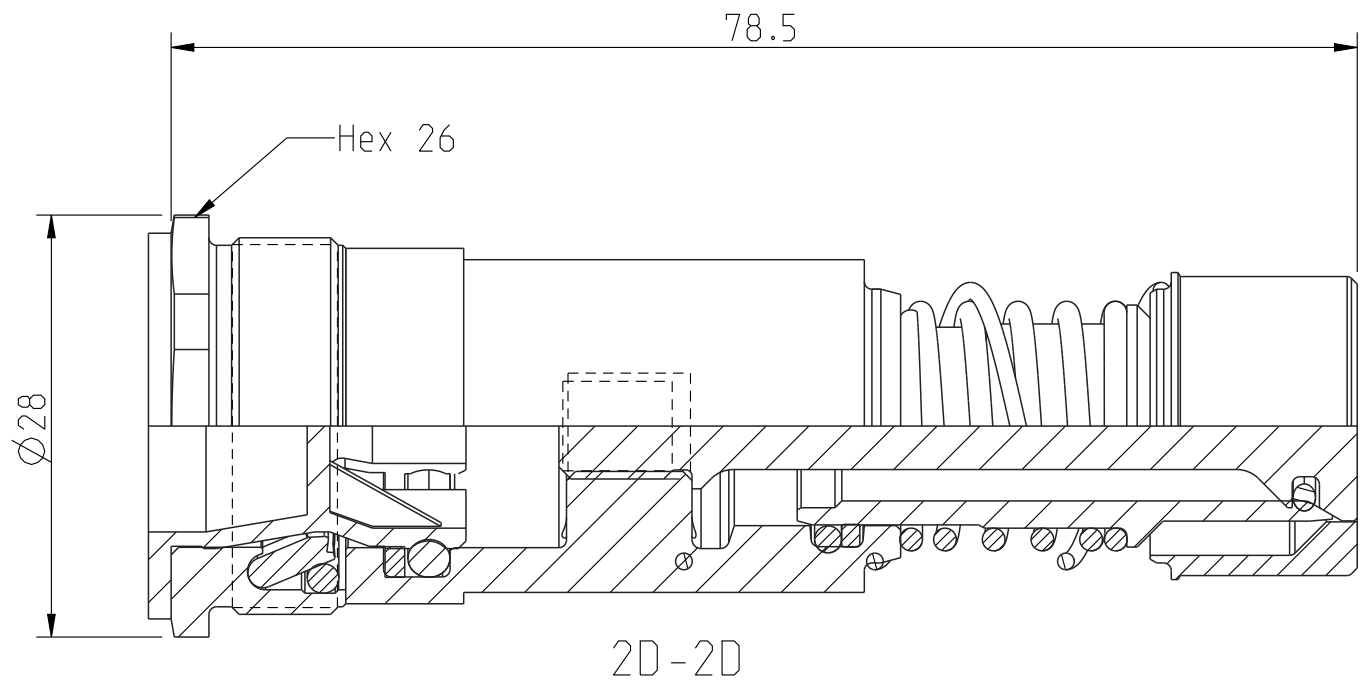

15	1	Valve Sleeve	Steel, plated
14	1	Valve opener	Steel, Plated
13	1	Spring	Steel
12	1	Spring	Stainless steel
11	1	Ratchet sleeve	Steel, plated
10	1	Protection plug	LDPE
9	1	O-ring	NBR
8	2	O-ring	NBR
7	1	O-ring	NBR
6	2	O-ring	NBR
5	5	Locking hook	Hard.steel, Plated
4	1	Front part	Steel, Fe/Zn
3	2	Backup ring	
2	2	Back-up ring	Hytrel
1	1	Back part	Steel, plated
Detalj Item	Antal Quant.	Benämning Description	Material Material

	Skala Scale	2:1	Ritad Drawn	CABPEOD	Kontr. Checked	JoEr	Godk. Appr.	PMB	ÄM nr. Alt. no.	-	Dat. Date	15-08-14
	Assembly drawing							Ritning nr/Drawing No.		Utg./Issue		
							50_365_1905		AB			