

CAD system: Inventor  
All rights reserved  
This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C

B


A

D




C

B

A

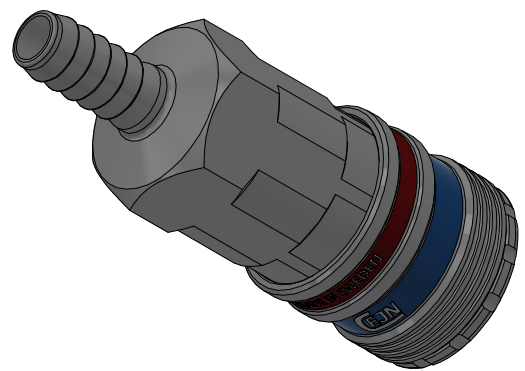

1 : 1

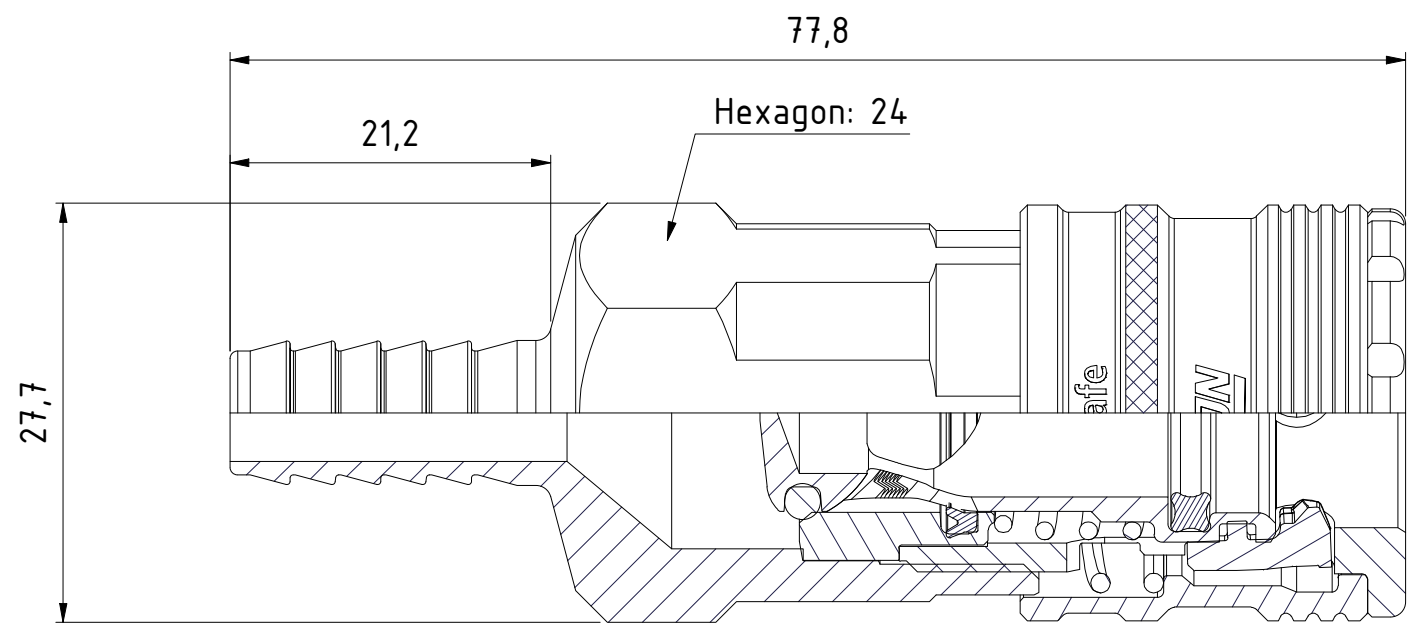

Connection stroke

|                    |                |
|--------------------|----------------|
| Product No.        | 104102003      |
| Nominal flow Ø DN: | 6,4 mm         |
| Connection Stroke: | 18,9 mm        |
| Max WP Connected:  | 16 bar         |
| Min BP Connected:  | 64 bar         |
| Temperature range: | -20°C - +100°C |
| Connection:        | Hose 5/16" 8mm |
| Sealing material:  | NBR            |

|    |   |                |                              |
|----|---|----------------|------------------------------|
| 11 | 1 | Valve          | Aluminum Lead Free           |
| 10 | 1 | Valve seat     | Aluminum Lead Free           |
| 9  | 1 | Spring         | Stainless Steel              |
| 8  | 1 | Spring         | Stainless Steel              |
| 7  | 1 | Lip seal       | NBR                          |
| 6  | 1 | Quad-Ring      | NBR                          |
| 5  | 1 | O-ring         | NBR                          |
| 4  | 1 | Locking sleeve | Hard. Steel, Zn 8 silver     |
| 3  | 3 | Hook           | Hard. Steel, Zn-Ni 8 transp. |
| 2  | 1 | Front part     | Hard. Steel Zn 8 Silver      |
| 1  | 1 | Back part      | Steel, Zn 8 Silver           |

| Item        | Qty | Description | Material   |
|-------------|-----|-------------|------------|
| State       |     | Drawn       | Checked    |
| Production  |     | CABLIJA     | ALAL       |
| ECO         |     | Approved    | Date       |
| 002136      |     | OSJO        | 2025-02-07 |
| Former No.  |     | Scale       |            |
| Drawing No. |     | 2 : 1       |            |
| 104102003   |     | Issue       | Sheet      |
|             |     | C           | 1 /(1 )    |



Coupling 5/16" hose NBR - eSafe