

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B



A

D

C


B

A

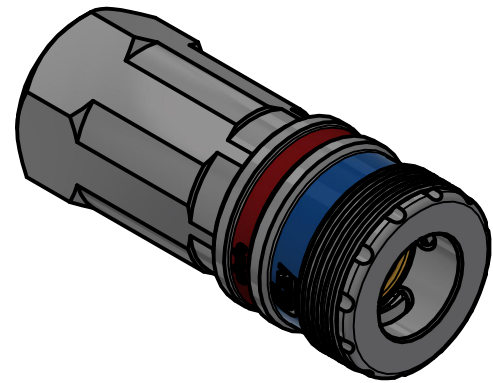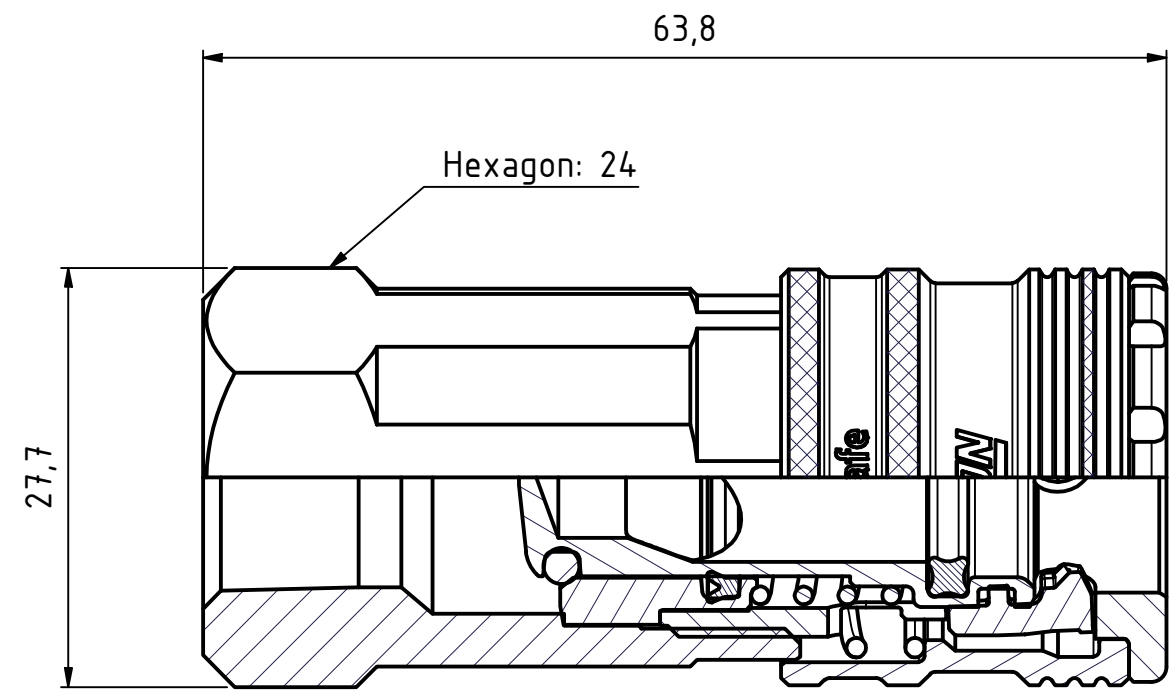

1 : 1

Product No. 104102404	
Nominal flow Ø DN:	10,4 mm
Connection Stroke:	18,9 mm
Max WP Connected:	16 bar
Min BP Connected:	140 bar
Temperature range:	-20°C - +100°C
Connection:	NPT 3/8" Female
Sealing material:	NBR

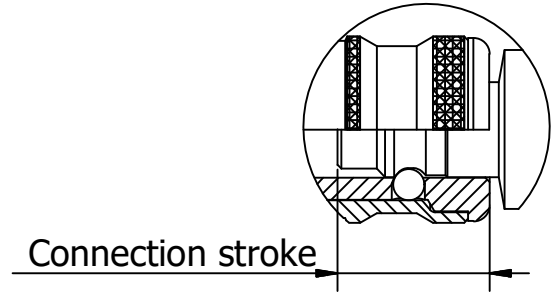

Connection stroke

11	1	Spring	Stainless Steel
10	1	Spring	Stainless Steel
9	1	Lip seal	NBR
8	1	Valve seat	Brass
7	1	Quad-Ring	NBR
6	1	O-ring	NBR
5	1	Valve	Brass
4	1	Locking sleeve	Hard. Steel, Zn 8 silver
3	3	Hook	Hard. Steel, Zn-Ni 8 transp.
2	1	Front part	Hard. Steel Zn 8 Silver
1	1	Back part	Steel, Zn 8 Silver
Item	Qty	Description	Material
		Scale 2 : 1	Drawn CABLHE
		Checked	Appr. JOOL
		ECO 11416	Date 2016-09-13
		Drawing No. 104102404	Issue B
		Sheet 1 / (1)	



Assembly Drawing 104102404