

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D



C

B

A

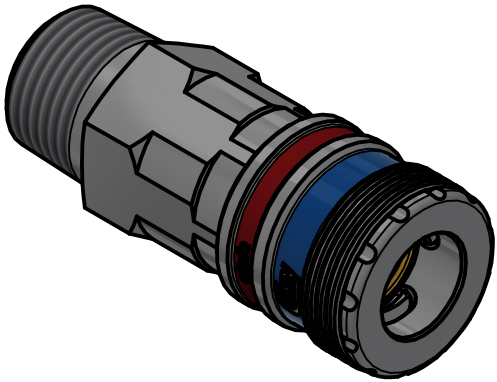

1 : 1

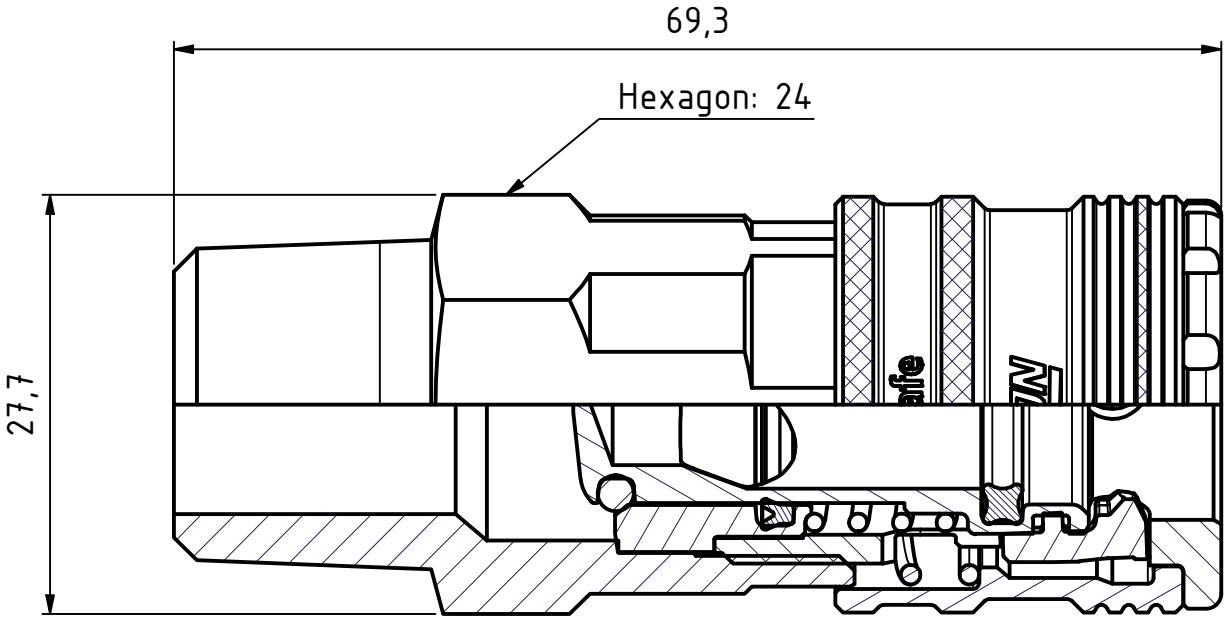

Connection stroke

Product No. 104102455	
Nominal flow Ø DN:	10,4 mm
Connection Stroke:	18,9 mm
Max WP Connected:	16 bar
Min BP Connected:	140 bar
Temperature range:	-20°C - +100°C
Connection:	NPT 1/2" male
Sealing material:	NBR

11	1	Spring	Stainless Steel	
10	1	Spring	Stainless Steel	
9	1	Lip seal	NBR	
8	1	Valve seat	Brass	
7	1	Quad-Ring	NBR	
6	1	O-ring	NBR	
5	1	Valve	Brass	
4	1	Locking sleeve	Hard. Steel, Zn 8 silver	
3	3	Hook	Hard. Steel, Zn-Ni 8 transp.	
2	1	Front part	Hard. Steel Zn 8 Silver	
1	1	Back part	Steel, Zn 8 Silver	
Item	Qty	Description	Material	
		Scale 2 : 1	Drawn CABLHE	Checked
		Appr. JOOL	ECO 11416	Date 2016-09-14
Assembly Drawing			Drawing No. 104102455	Issue B
				Sheet 1 /(1)