

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©





A

B



C

D

Product No. 104302004	
Nominal flow Ø DN:	7.8 mm
Connection Stroke:	23.6 mm
Max WP Connected:	16 bar
Min BP Connected:	64 bar
Temperature range:	-20°C - +100°C
Connection:	Hose 3/8" 10mm
Sealing material:	NBR

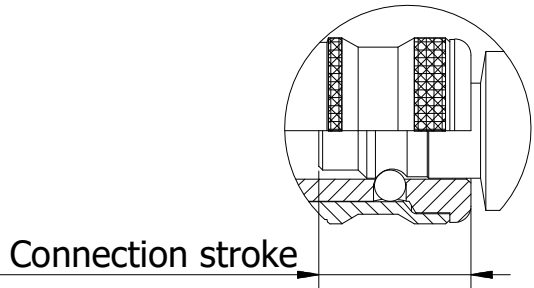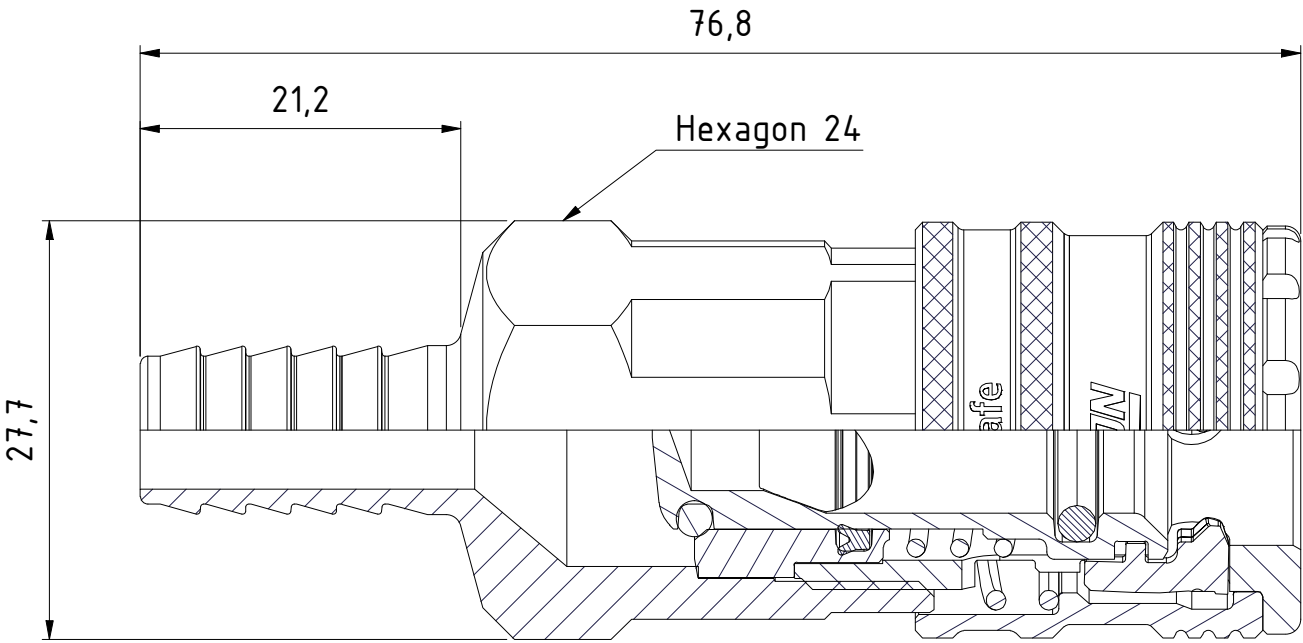

Connection stroke




12	1	Valve seat	Aluminum Lead Free
11	1	Locking sleeve	Hard. Steel, Zn 8 silver
10	1	Spring	Stainless Steel
9	1	Spring	Stainless Steel
8	1	Lip seal	NBR
6	1	O-ring	NBR
5	1	O-ring	NBR
4	1	Valve	Aluminum Lead Free
3	3	Hook	Hard. Steel, Zn-Ni 8 transp.
2	1	Front part	Hard. Steel Zn 8 Silver
1	1	Back part	Steel, Zn 8 Silver

Item	Qty	Description	Material	
State		Drawn	Checked	Approved
Production		CABLIJA	ALAL	OSJO
Date		2025-05-09		
ECO		002136	Former No.	
Drawing No.		104302004		Scale
				2 : 1
				Issue
				C
				Sheet
				1 /(1)



Coupling 3/8" hose NBR - eSafe

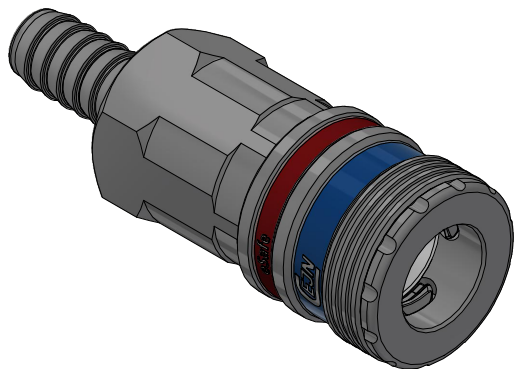

1 : 1

B

C

D

A