

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D



C

B


A

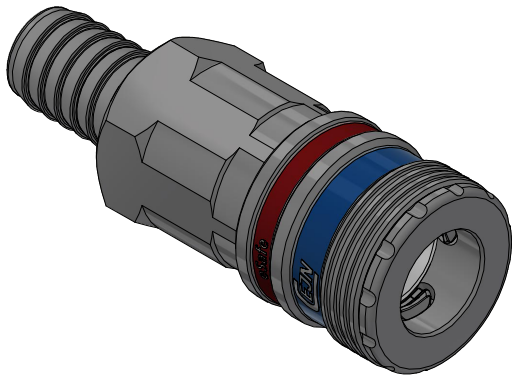

1 : 1

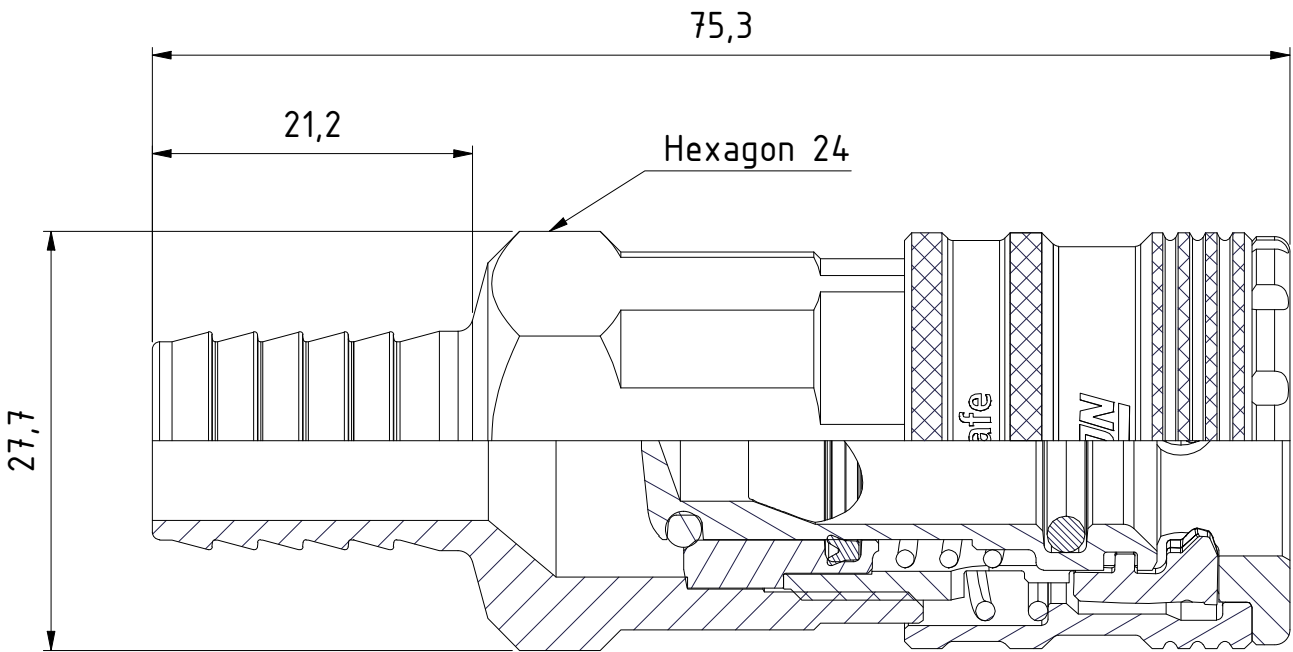

Connection stroke



11	1	Valve	Aluminum Lead Free
10	1	Valve seat	Aluminum Lead Free
9	1	Locking sleeve	Hard. Steel, Zn 8 silver
8	1	Spring	Stainless Steel
7	1	Spring	Stainless Steel
6	1	Lip seal	NBR
5	1	O-ring	NBR
4	1	O-ring	NBR
3	3	Hook	Hard. Steel, Zn-Ni 8 transp.
2	1	Front part	Hard. Steel Zn 8 Silver
1	1	Back part	Steel, Zn 8 Silver

Item	Qty	Description	Material
State		Drawn	Checked
Production		CABLIJA	ALAL
Approved		OSJO	Date
			2025-05-09
ECO		Former No.	Scale
002136			2 : 1
Drawing No.		Issue	Sheet
104302005		C	1 /(1)



Coupling 1/2" hose NBR - eSafe

Product No. 104302005

Nominal flow $\varnothing$ DN: 8.2 mm
Connection Stroke: 23.6 mm
Max WP Connected: 16 bar
Min BP Connected: 64 bar
Temperature range: -20°C - +100°C
Connection: Hose 1/2" 13mm
Sealing material: NBR