

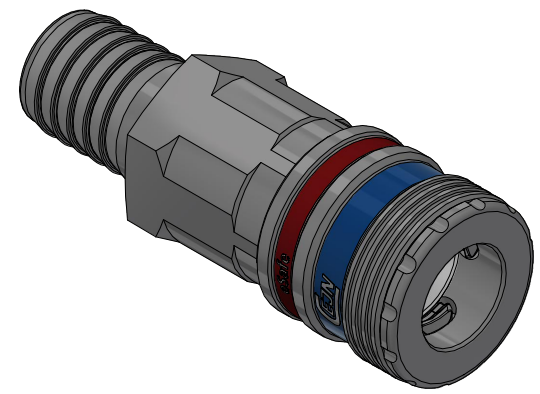


This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

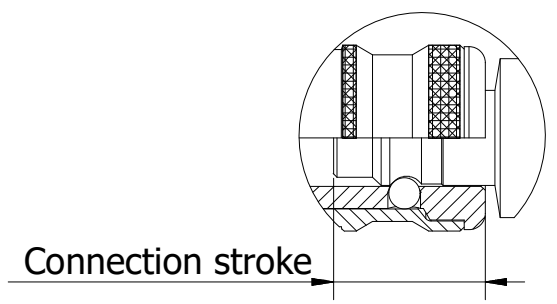


D
C
B
A

Product No. 104302006	
Nominal flow Ø DN:	8.2 mm
Connection Stroke:	23.6 mm
Max WP Connected:	16 bar
Min BP Connected:	64 bar
Temperature range:	-20°C - +100°C
Connection:	Hose 5/8" 16mm
Sealing material:	NBR

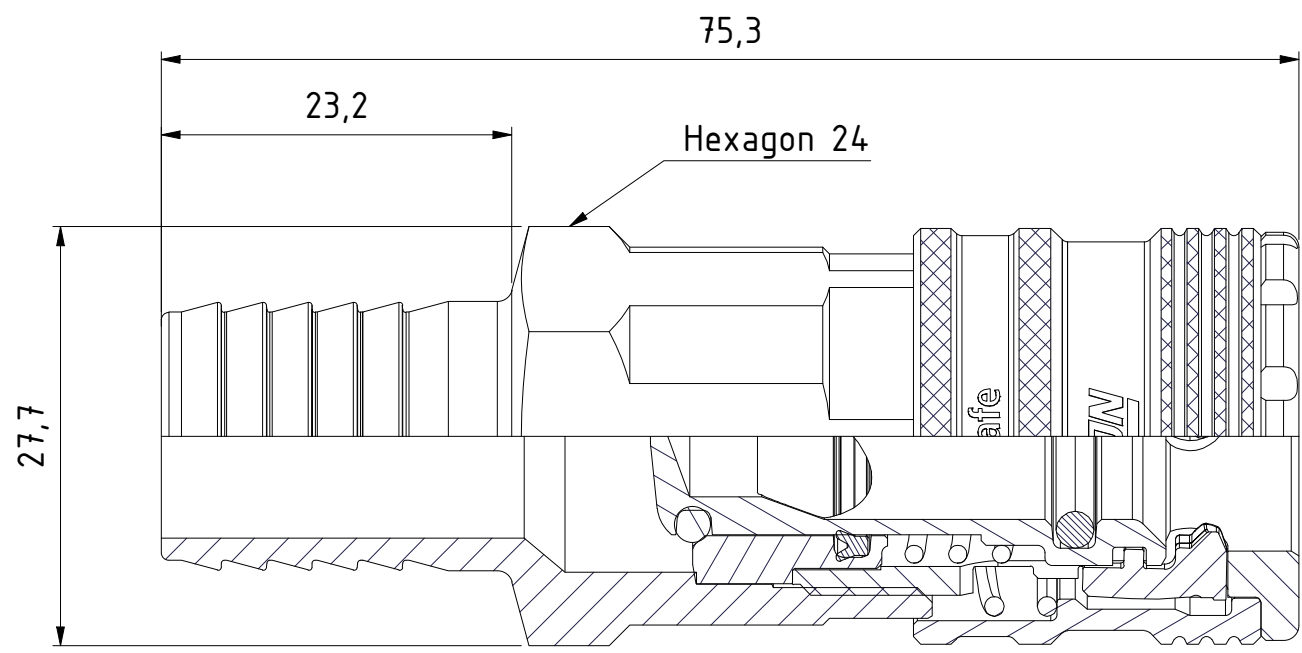

1 : 1

D
C
B
A



11	1	Valve	Aluminum Lead Free
10	1	Valve seat	Aluminum Lead Free
9	1	Locking sleeve	Hard. Steel, Zn 8 silver
8	1	Spring	Stainless Steel
7	1	Spring	Stainless Steel
6	1	Lip seal	NBR
5	1	O-ring	NBR
4	1	O-ring	NBR
3	3	Hook	Hard. Steel, Zn-Ni 8 transp.
2	1	Front part	Hard. Steel Zn 8 Silver
1	1	Back part	Steel, Zn 8 Silver
Item	Qty	Description	Material
State Production		Drawn CABLIJA	Checked ALAL
		Approved OSJO	Date 2025-05-09
		ECO 002136	Former No.
		Scale 2 : 1	
		Drawing No. 104302006	Issue C
			Sheet 1 /(1)



Coupling 5/8" hose NBR - eSafe