

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3



D

C


B

A

Product No.	104302066
Nominal flow Ø DN:	8,2 mm
Connection Stroke:	23,6 mm
Max WP Connected:	12 bar w. CEJN braided PUR hose
Min BP Connected:	48 bar w. CEJN braided PUR hose
Temperature range:	-20°C - +100°C
Connection:	Stream-Line 11x16
Sealing material:	NBR
Hexagon:	24 (2x)

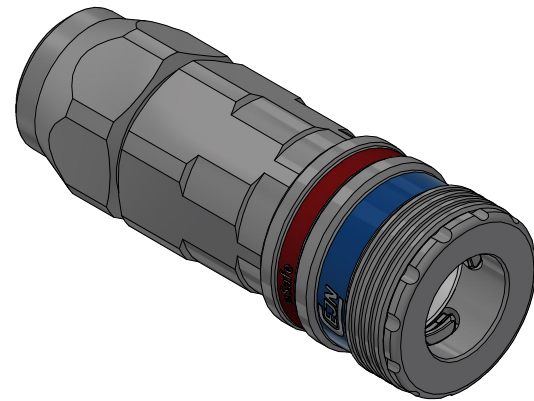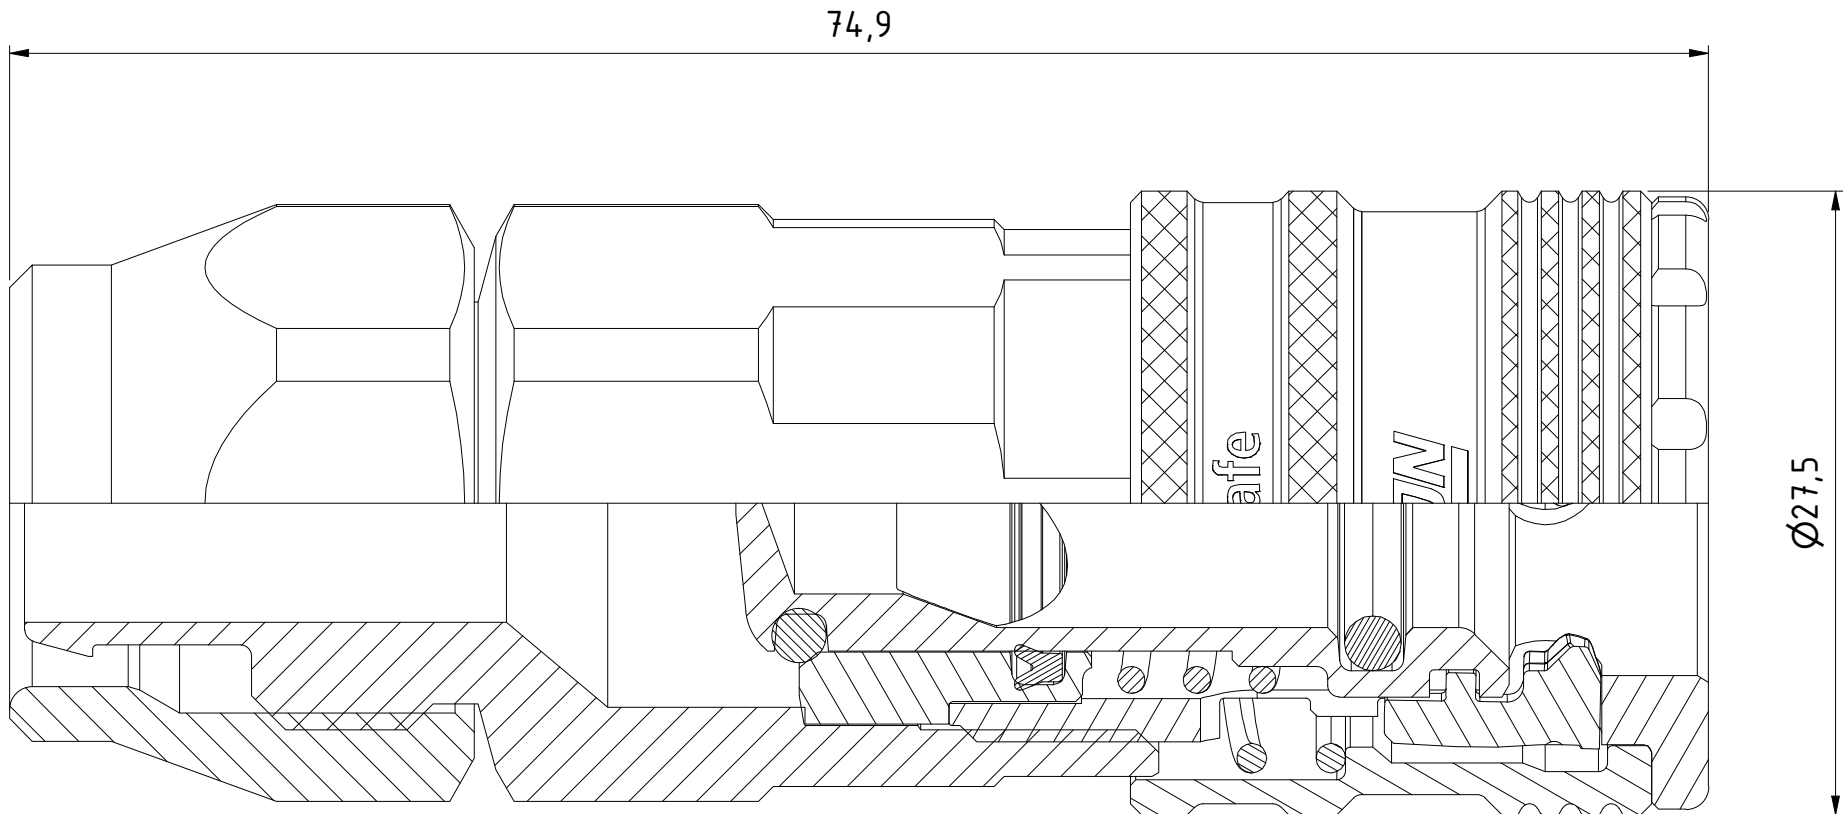


1 : 1



13	1	Valve seat	Aluminum Lead Free
12	1	Locking sleeve	Hard. Steel, Zn 8 silver
11	1	Spring	Stainless Steel
10	1	Spring	Stainless Steel
9	1	Lip seal	NBR
7	1	O-ring	NBR
6	1	O-ring	NBR
5	1	Valve	Aluminum Lead Free
4	3	Hook	Hard. Steel, Zn-Ni 8 transp.
3	1	Front part	Hard. Steel Zn 8 Silver
2	1	Swivel nut 11x16	Steel, Zn 8 Silver
1	1	Back part 11x16	Steel, Zn 8 Silver

Item	Qty	Description	Material
State		Drawn	Checked
Production		CABLIJA	ALAL
Approved		OSJO	Date
ECO		002136	2025-05-09
Former No.		Scale	
Drawing No.		104302066	3 : 1
Issue		E	Sheet
			1 /(1)



Connection stroke

6

5

4

3

2

1