

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©





A

B

C



D

Product No. 104302157	
Nominal flow Ø DN:	8.2 mm
Connection Stroke:	23.6 mm
Max WP Connected:	16 bar
Min BP Connected:	140 bar
Temperature range:	-20°C - +100°C
Connection:	R 3/4" Male
Sealing material:	NBR

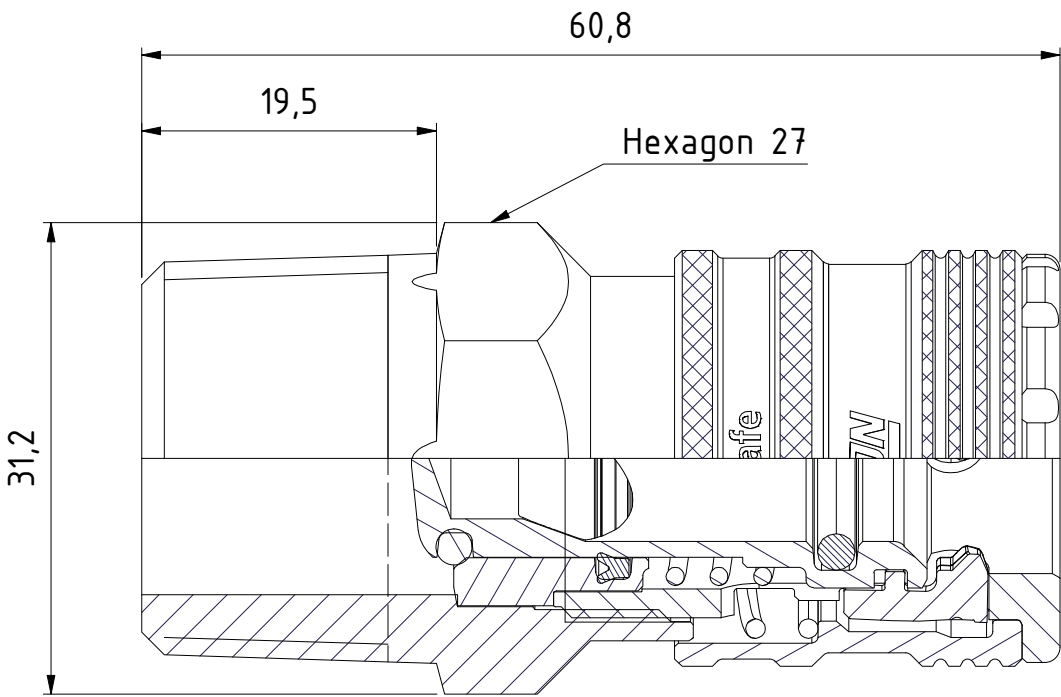

11	1	Valve	Aluminum Lead Free
10	1	Valve seat	Aluminum Lead Free
9	1	Locking sleeve	Hard. Steel, Zn 8 silver
8	1	Spring	Stainless Steel
7	1	Spring	Stainless Steel
6	1	Lip seal	NBR
5	1	O-ring	NBR
4	1	O-ring	NBR
3	3	Hook	Hard. Steel, Zn-Ni 8 transp.
2	1	Front part	Hard. Steel Zn 8 Silver
1	1	Back part	Steel, Zn 8 Silver

Item	Qty	Description	Material	
State		Drawn	Checked	Approved
Production		CABLIJA	ALAL	OSJO
Date		2025-05-12		
ECO		002136	Former No.	
Drawing No.		104302157		Scale
				2 : 1
		Issue		Sheet
		C		1 /(1)

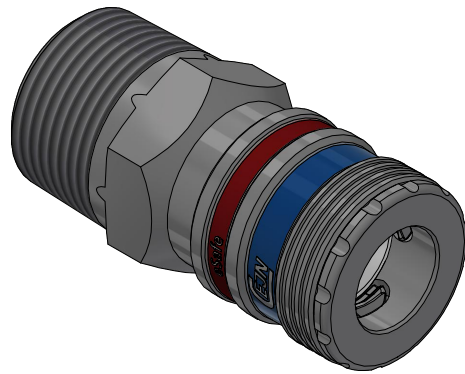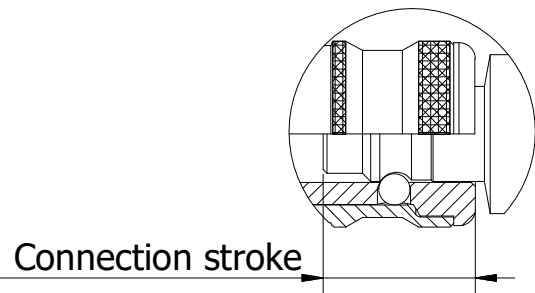

1 : 1



Coupling R 3/4" male NBR - eSafe

002136
104302157

Former No.
Issue
Scale
2 : 1
Sheet
1 /(1)