

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C


B

D



C

B

A

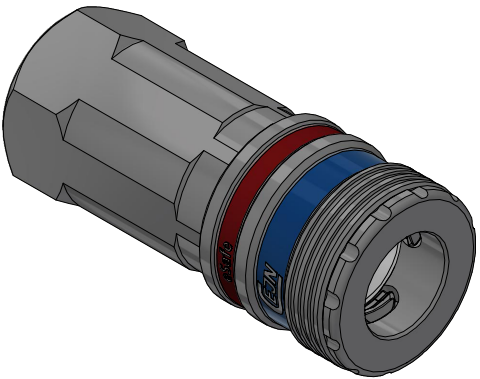


1 : 1

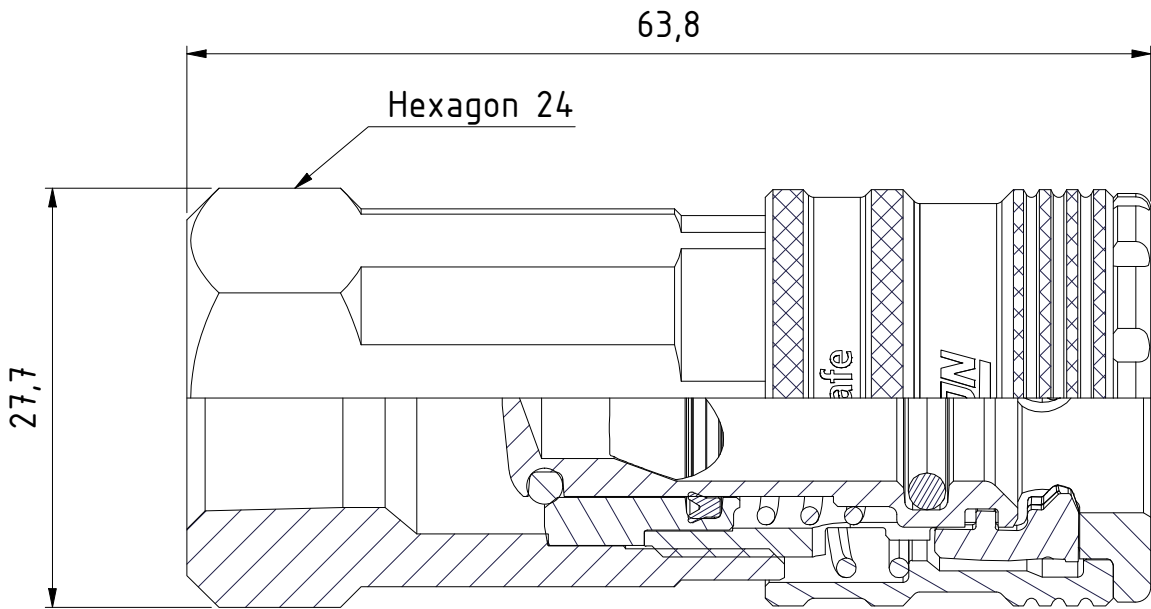

11	1	Valve	Aluminum Lead Free
10	1	Valve seat	Aluminum Lead Free
9	1	Locking sleeve	Hard. Steel, Zn 8 silver
8	1	Spring	Stainless Steel
7	1	Spring	Stainless Steel
6	1	Lip seal	NBR
5	1	O-ring	NBR
4	1	O-ring	NBR
3	3	Hook	Hard. Steel, Zn-Ni 8 transp.
2	1	Front part	Hard. Steel Zn 8 Silver
1	1	Back part	Steel, Zn 8 Silver

Item	Qty	Description	Material
State		Drawn	Checked
Production		CABLIJA	ALAL
ECO		Approved	Date
002136		OSJO	2025-05-12
Former No.		Scale	
		2 : 1	
Drawing No.		Issue	Sheet
104302404		C	1 /(1)



Connection stroke

Product No. 104302404

Nominal flow $\varnothing$ DN: 8.2 mm
Connection Stroke: 23.6 mm
Max WP Connected: 16 bar
Min BP Connected: 140 bar
Temperature range: -20°C - +100°C
Connection: 3/8" NPT Fem
Sealing material: NBR



Coupling 3/8" NPT fem NBR
- eSafe

002136
104302404

Former No.

Issue

C

Scale

Sheet

1 /(1)