

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C

B



A

D

C

B

A

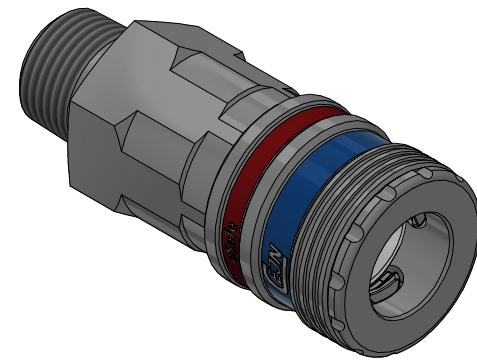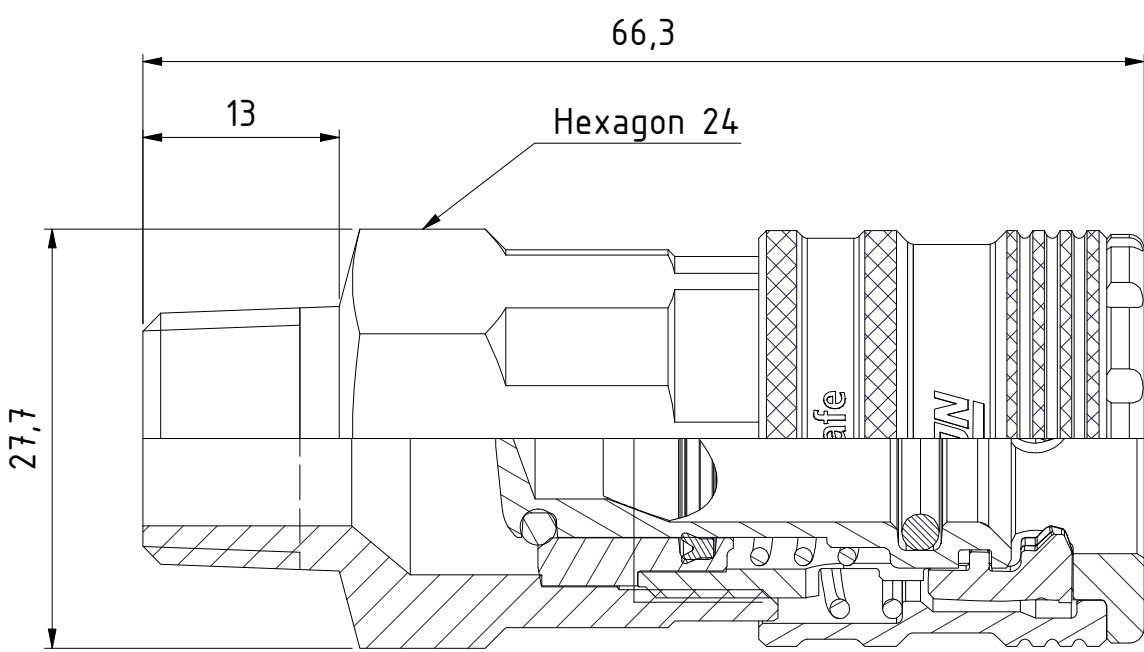


1 : 1



11	1	Valve	Aluminum Lead Free
10	1	Valve seat	Aluminum Lead Free
9	1	Locking sleeve	Hard. Steel, Zn 8 silver
8	1	Spring	Stainless Steel
7	1	Spring	Stainless Steel
6	1	Lip seal	NBR
5	1	O-ring	NBR
4	1	O-ring	NBR
3	3	Hook	Hard. Steel, Zn-Ni 8 transp.
2	1	Front part	Hard. Steel Zn 8 Silver
1	1	Back part	Steel, Zn 8 Silver
Item	Qty	Description	Material

State	Drawn	Checked	Approved	Date
Production	CABLIJA	ALAL	OSJO	2025-05-12
 Coupling 3/8" NPT male NBR - eSafe		ECO	Former No.	Scale
		002136		2 : 1
Drawing No.			Issue	Sheet
104302454			C	1 /(1)

Product No.	104302454
Nominal flow Ø DN:	8.2 mm
Connection Stroke:	23.6 mm
Max WP Connected:	16 bar
Min BP Connected:	140 bar
Temperature range:	-20°C - +100°C
Connection:	3/8" NPT Male
Sealing material:	NBR

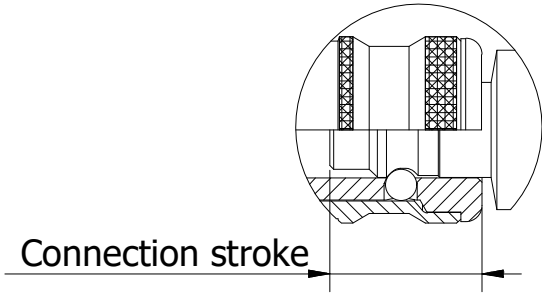

Connection stroke