

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C

B

A



D

C


B

A


Product No. 104302457	
Nominal flow Ø DN:	8.2 mm
Connection Stroke:	23.6 mm
Max WP Connected:	16 bar
Min BP Connected:	140 bar
Temperature range:	-20°C - +100°C
Connection:	3/4" NPT Male
Sealing material:	NBR

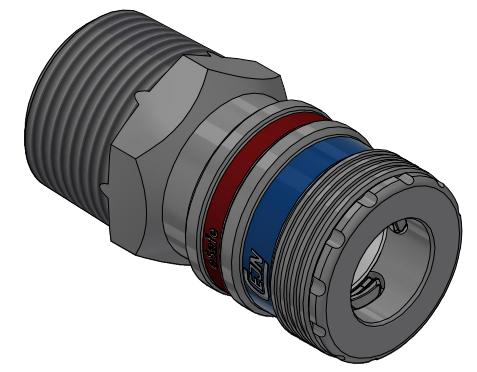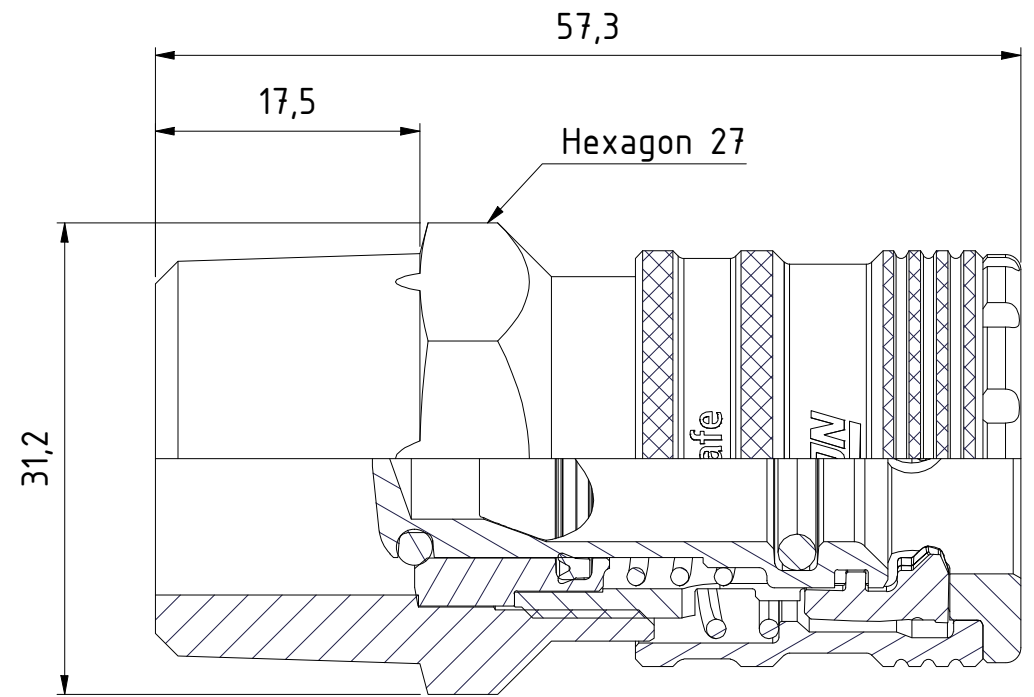

1 : 1



11	1	Valve	Aluminum Lead Free		
10	1	Valve seat	Aluminum Lead Free		
9	1	Locking sleeve	Hard. Steel, Zn 8 silver		
8	1	Spring	Stainless Steel		
7	1	Spring	Stainless Steel		
6	1	Lip seal	NBR		
5	1	O-ring	NBR		
4	1	O-ring	NBR		
3	3	Hook	Hard. Steel, Zn-Ni 8 transp.		
2	1	Front part	Hard. Steel Zn 8 Silver		
1	1	Back part	Steel, Zn 8 Silver		
Item	Qty	Description	Material		
State		Drawn	Checked	Approved	Date
Production		CABLIJA	ALAL	OSJO	2025-05-12
 Coupling 3/4" NPT male NBR - eSafe			ECO	Former No.	Scale
			002136		2 : 1
			Drawing No.	Issue	Sheet
			104302457	C	1 /(1)



Connection stroke