

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D


C

B

A

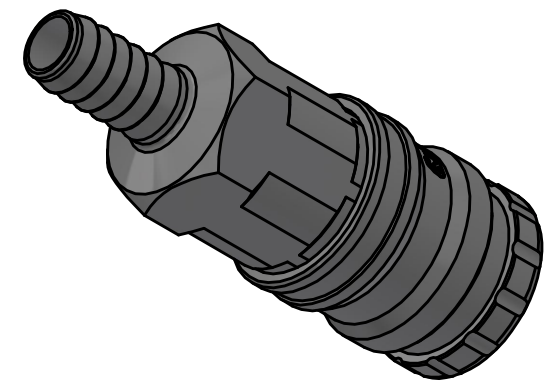


1 : 1

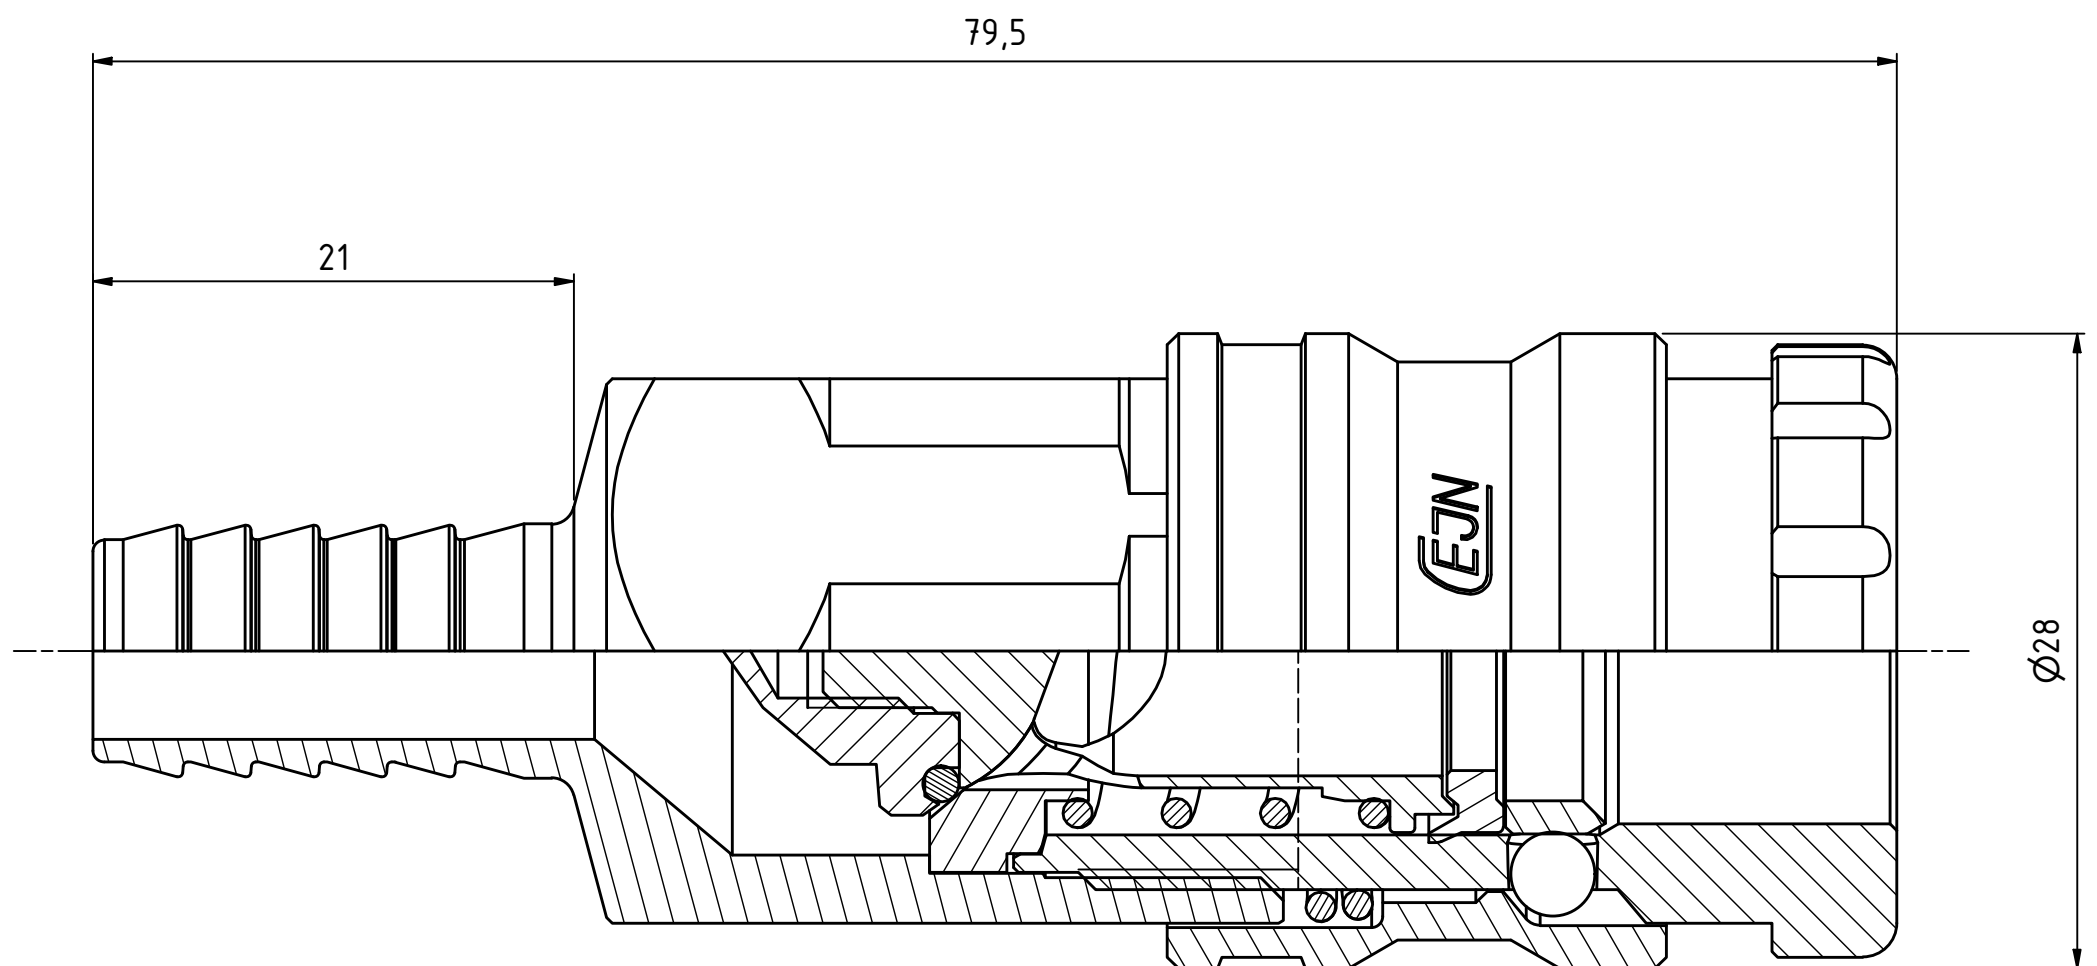

12	1	Back part	Steel, Zn 8 Silver
11	6	Ball	Stainless steel
10	1	Locking sleeve	Hard.steel, FeNi5b
9	1	Spring	Stainless steel
8	1	Spring	Stainless steel
7	1	Valve nut	Brass
6	1	O-ring	NBR
5	1	Lip Seal	NBR
4	1	Ratchet sleeve	Brass
3	1	Valve seat	Brass
2	1	Valve	Brass
1	1	Front part	Steel, Chem. Ni.
Item	Qty	Description	Material

Product No.	104421004
Nominal flow Ø DN:	7.8 mm
Connection Stroke:	22.3 mm
Max WP Connected:	35 bar
Min BP Connected:	140 bar
Temperature range:	-30°C - +100°C
Connection:	Hose 3/8" 10,0mm
Sealing material:	NBR
Hexagon:	22

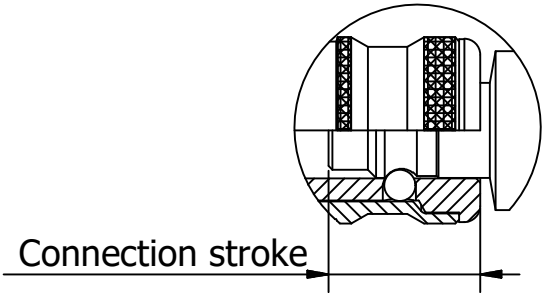

Scale

3 : 1

Drawn

CABANLA

Checked

LHE

Appr.

JOOL

ECO

11916

Date

2018-01-08

Assembly Drawing

104421004

Drawing No.

104421004

Issue

C

Sheet

1 /(1)