



Connection stroke

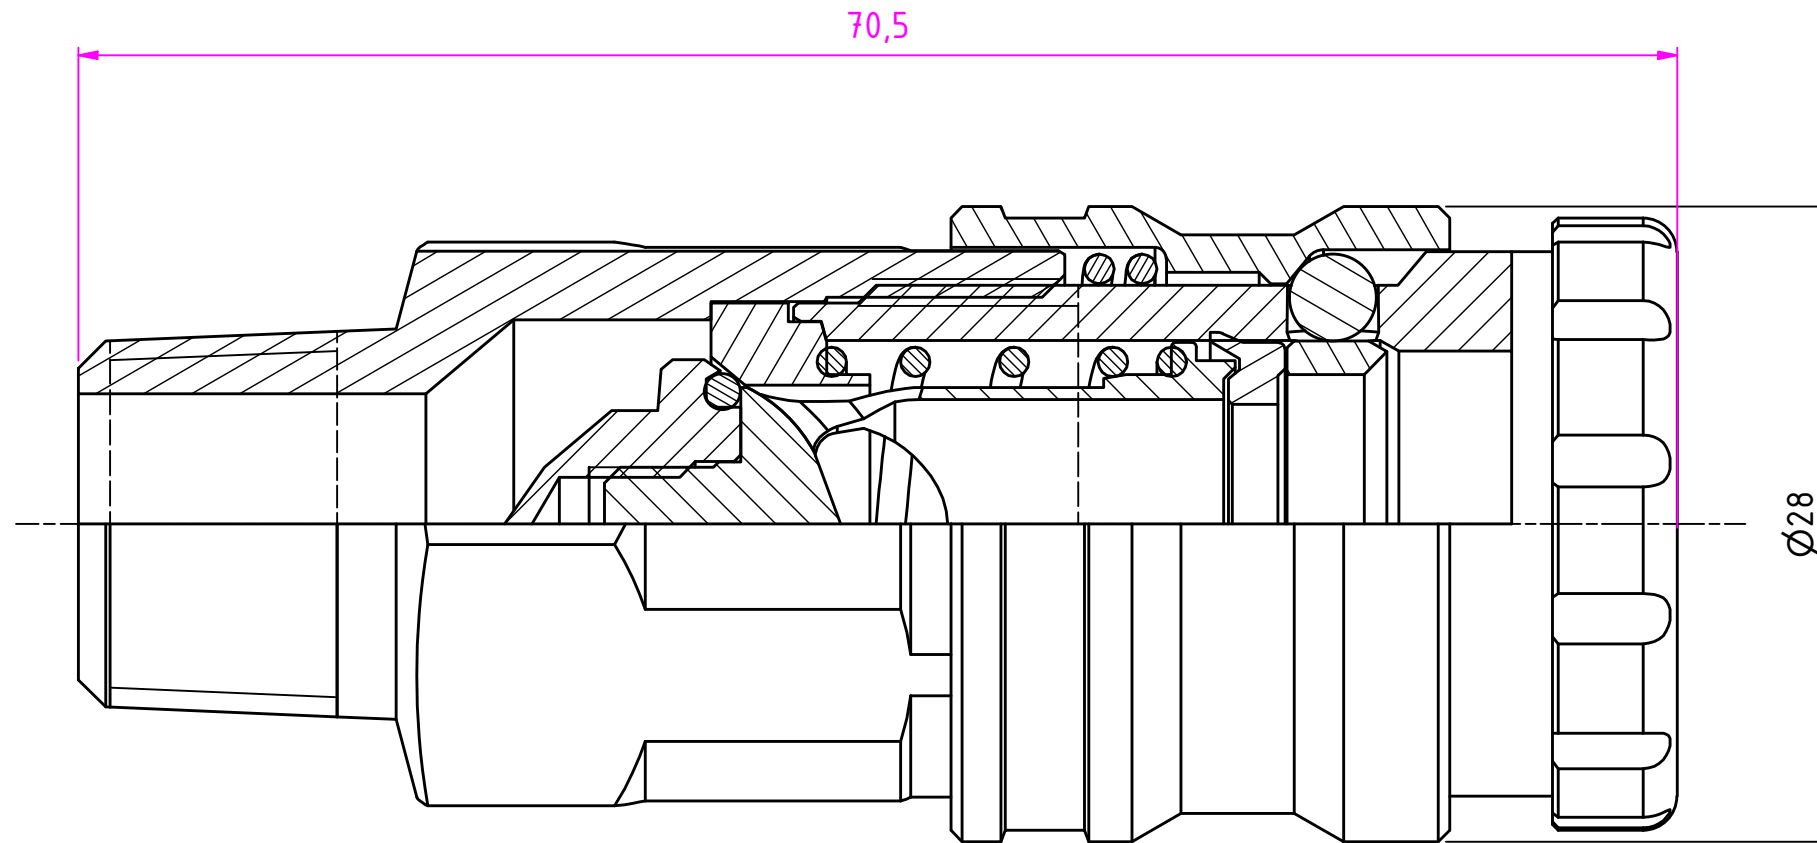

12	1	Back part	Steel, Zn 8 Silver
11	6	Ball	Stainless steel
10	1	Locking sleeve	Hard.steel, FeNi5b
9	1	Spring	Stainless steel
8	1	Spring	Stainless steel
7	1	Valve nut	Brass
6	1	O-ring	NBR
5	1	Lip Seal	NBR
4	1	Ratchet sleeve	Brass
3	1	Valve seat	Brass
2	1	Valve	Brass
1	1	Front part	Steel, Chem. Ni.
Item	Qty	Description	Material

Product No.	104421154
Nominal flow Ø DN:	10.4 mm
Connection Stroke:	22.3 mm
Max WP Connected:	35 bar
Min BP Connected:	140 bar
Temperature range:	-30°C - +100°C
Connection:	R 3/8" Male
Sealing material:	NBR
Hexagon:	24



Scale 3 : 1	Drawn CABANLA	Checked LHE	Appr. JOOL	ECO 11916	Date 2018-01-10	
Assembly Drawing			Drawing No. 104421154		Issue C	Sheet 1 /(1)