

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©





A

B


C

D

Product No. 104421155	
Nominal flow Ø DN:	10.4 mm
Connection Stroke:	22.3 mm
Max WP Connected:	35 bar
Min BP Connected:	140 bar
Temperature range:	-30°C - +100°C
Connection:	R 1/2" Male
Sealing material:	NBR
Hexagon:	24

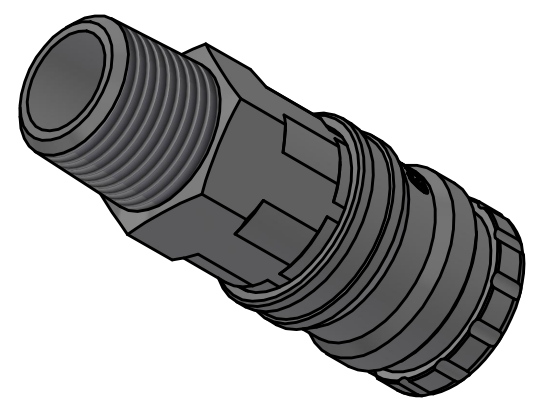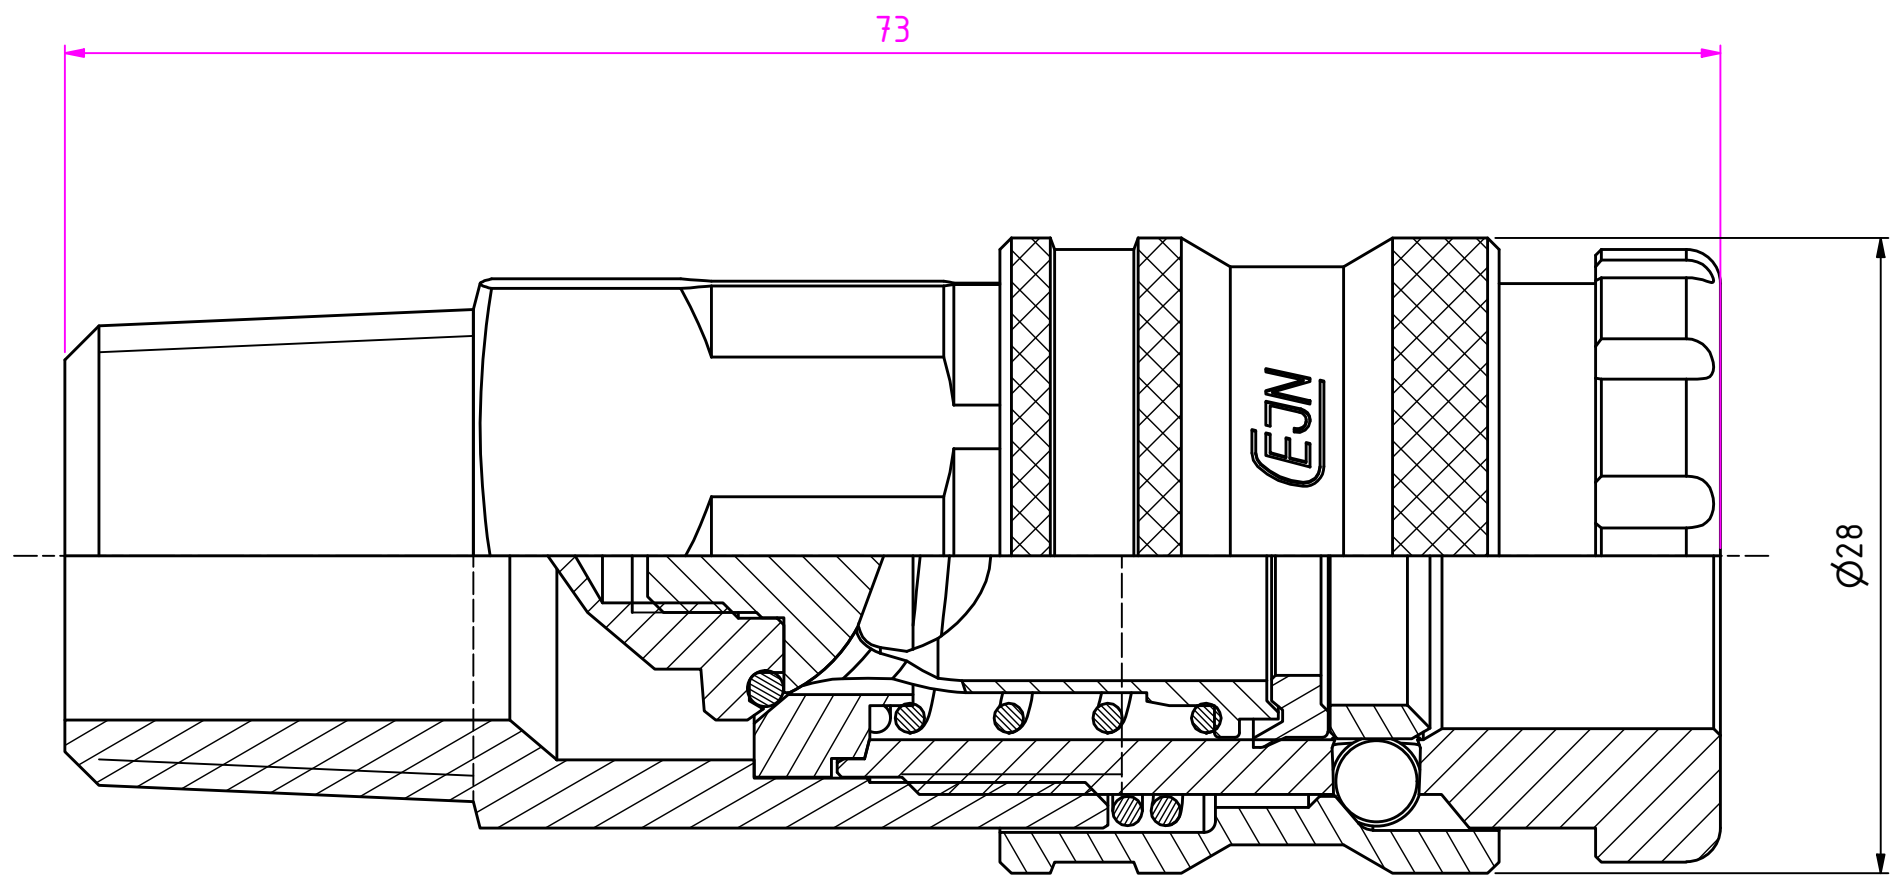

1 : 1

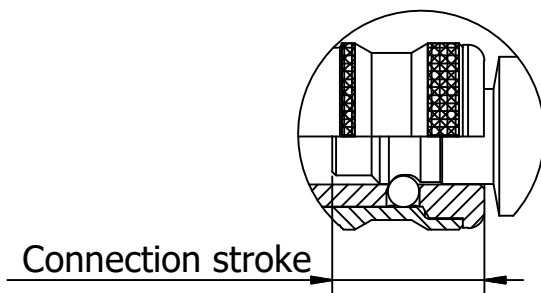

Connection stroke



12	1	Back part	Steel, Zn 8 Silver
11	6	Ball	Stainless steel
10	1	Locking sleeve	Hard steel, FeNi5b
9	1	Spring	Stainless steel
8	1	Spring	Stainless steel
7	1	Valve nut	Brass
6	1	O-ring	NBR
5	1	Lip Seal	NBR
4	1	Ratchet sleeve	Brass
3	1	Valve seat	Brass
2	1	Valve	Brass
1	1	Front part	Steel, Chem. Ni.
Item	Qty	Description	Material

Scale
3 : 1

Drawn
CABANLA

Checked
LHE

Appr.
JOOL

ECO
11916

Date
2018-01-10

Assembly Drawing 104421155

Drawing No.

Issue
C

Sheet
1 /(1)