

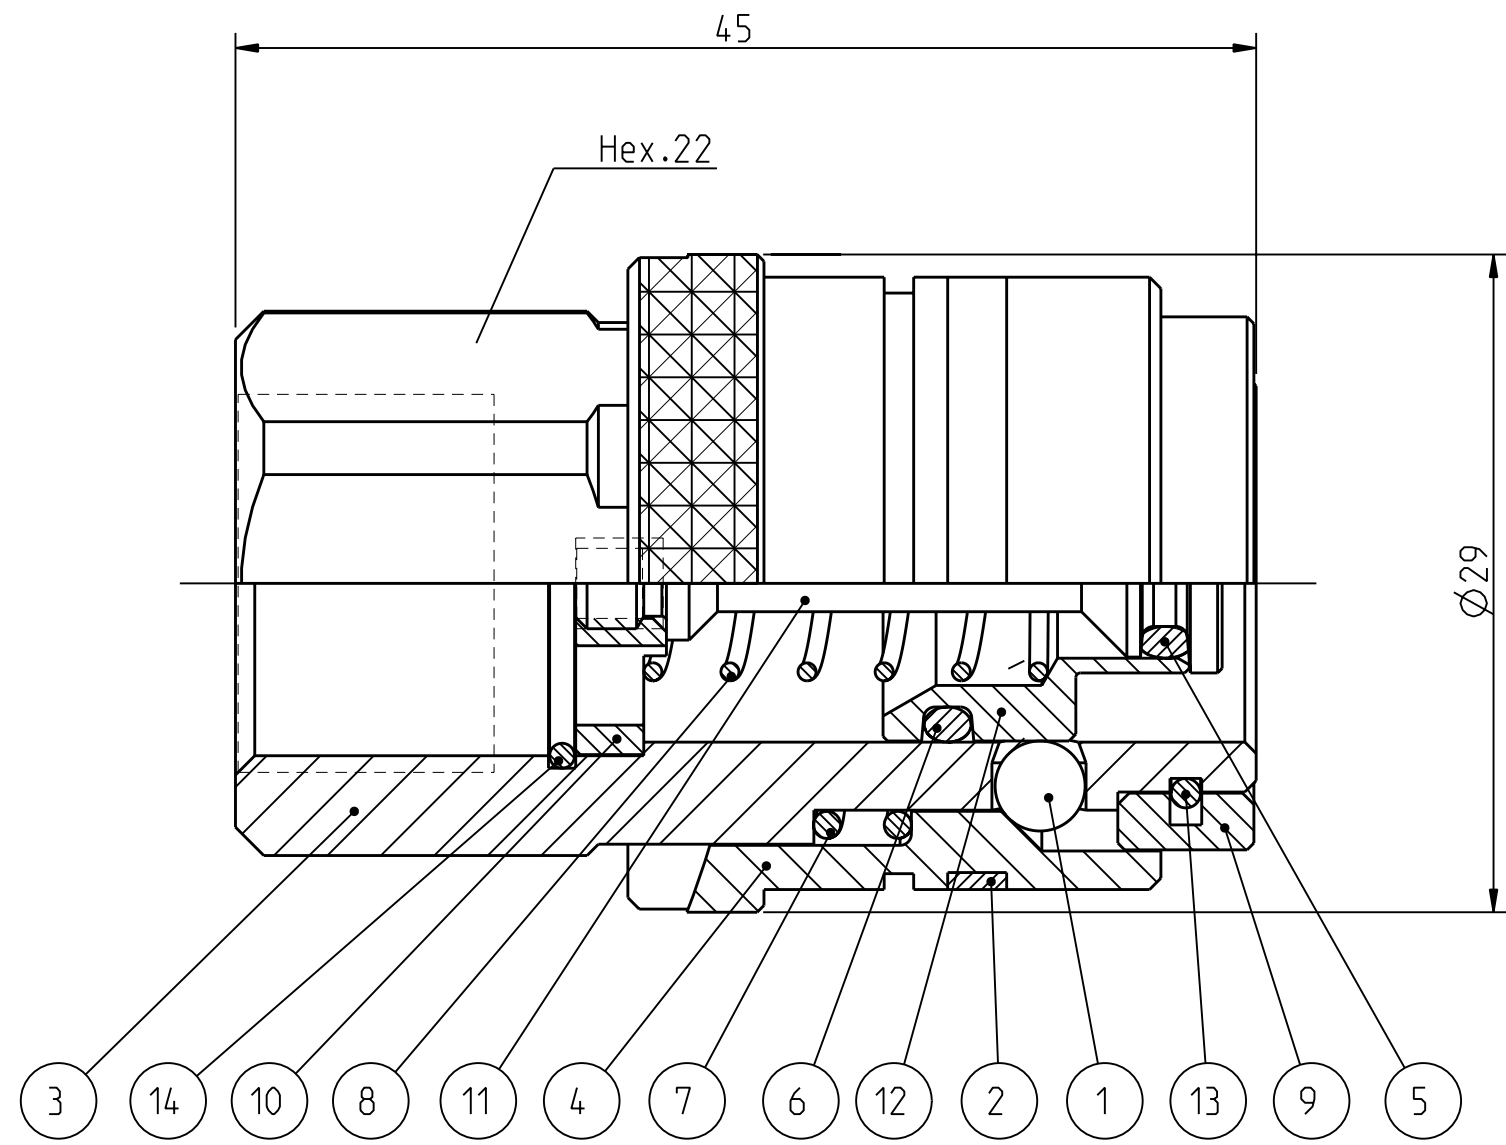


Denna handling för ej utan vårt medgivande delges annan, kopieras eller eljest överförigen användas.
Överträdelse härvid beivras med stöd av gällande lag.
This document must not be copied, either completely or in part, without permission.
Any infringement will have legal consequences.

Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdrückliche Genehmigung kopiert oder auf andere Weise vervielfältigt werden.
Alle r  tigheten f  rbeh  lts.
All rights reserved.
Alle Rechte vorbehalten.



Product no.: 10_467_1200



Connection stroke

Max working pressure:	20	bar connected
	20	bar disconnected
Min burst pressure:	80	bar connected
	80	bar disconnected
Sealing material:	NBR	
Temperatur range:	-15 �C - +100 �C	
Nominal flow diameter,DN:	6	mm
Connection	G 3/8" Female	
Connection stroke:	16.6	mm

14	1	Wire coil	Stainless steel
13	1	Wire coil	Stainless steel
12	1	Valve sleeve	Brass, CuNi5b
11	1	Valve pin	Brass, CuNi5b
10	1	Stop for valve	Brass
9	1	Stop flange	Brass, CuNi5b
8	1	Spring	Stainless steel
7	1	Spring	Stainless steel
6	1	O-ring	NBR
5	1	O-ring	NBR
4	1	Locking sleeve	Brass, CuNi5b
3	1	Coupling body	Brass, CuNi5b
2	1	Checking ring	Plastic
1	6	Ball	Stainless steel
Pos.	Antal Quant.	Ben��mning Description	Material Material



Skala Scale	3:1	Rit��d Drawn	LES	Kontr. Checked	JE	Godk. Appr.	KK	��M nr. Alt. no.	6202	Dat. Date	040916
Assembly drawing								Ritning nr./Drawing No.		Utg./Issue	
50_467_1200								AA			