



Alla rättigheter förbehålls.
 All rights reserved.
 Alle Rechte vorbehalten.

Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdrückliche Genehmigung kopiert oder auf andere Weise vervielfältigt werden.

Denna handling får ej utan vårt medgivande delges annan. Kopieras eller eljest obehörigen användas. Övertryckelse härvid beivras med stöd av gällande lag.



Max working pressure:	20	bar connected
	20	bar disconnected
Min burst pressure:	80	bar connected
	80	bar disconnected
Sealing material:	NBR	
Temperatur range:	-15 °C - +100 °C	
Nominal flow diameter,DN:	6	mm
Connection	G 3/8" Female	
Connection stroke:	-	mm

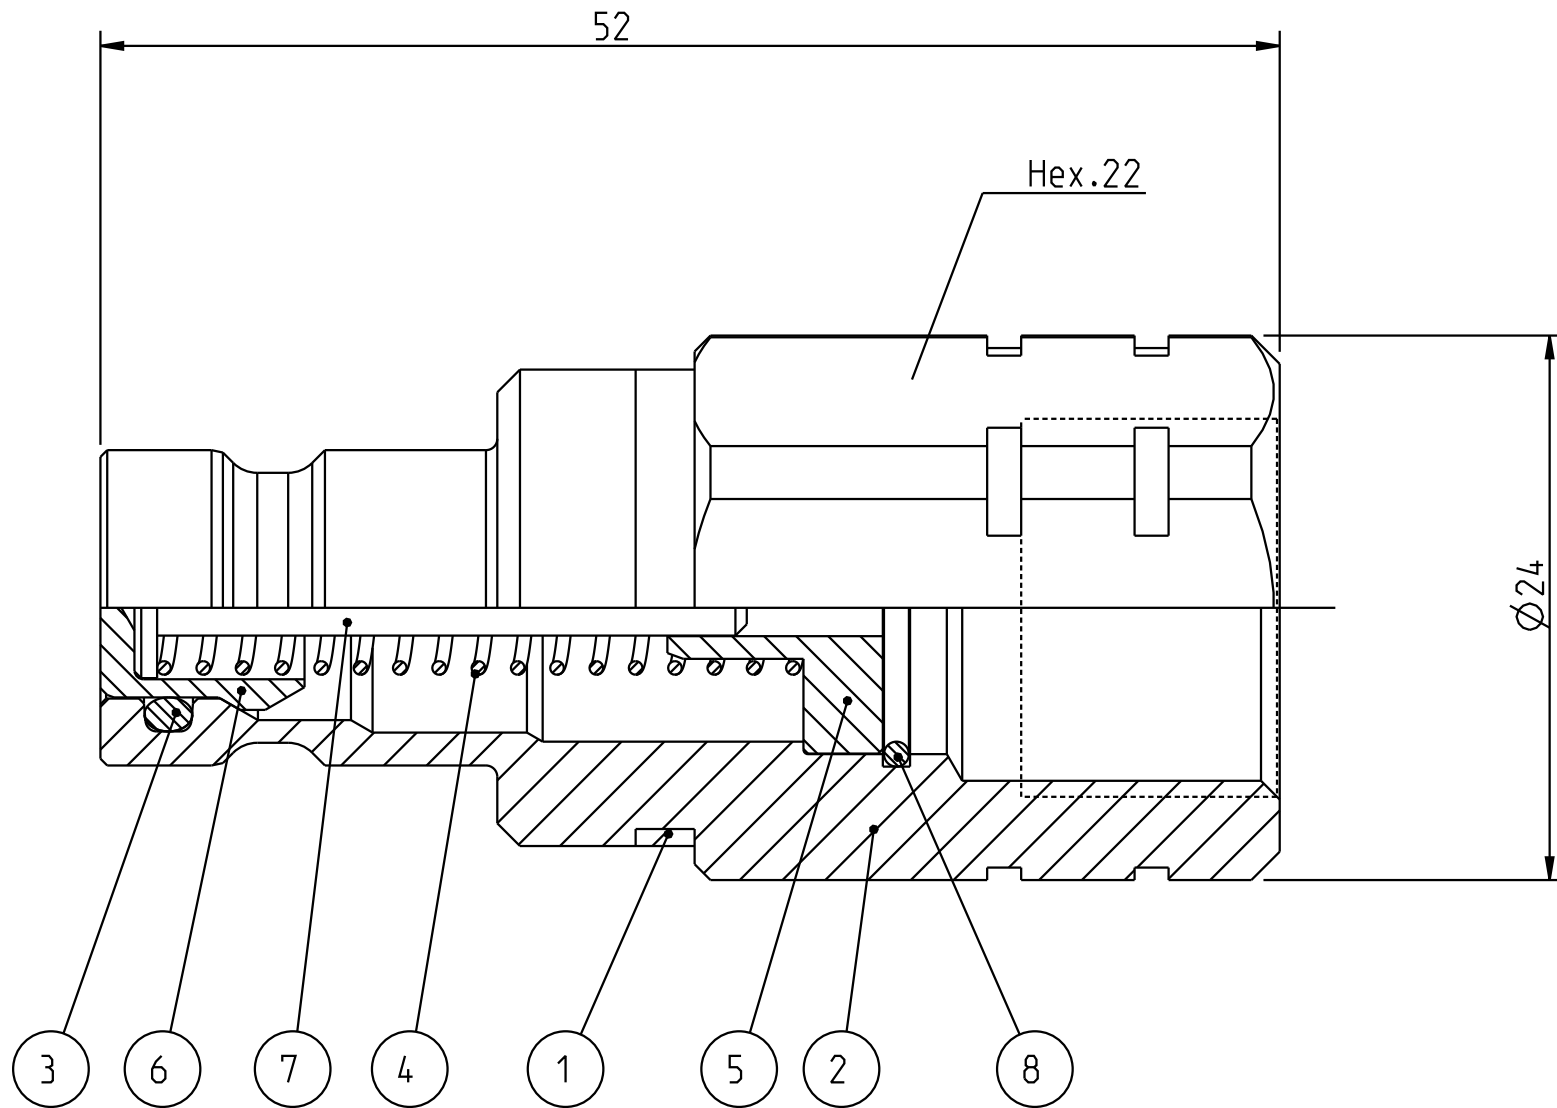

8	1	Wire coil	Acid-proof steel
7	1	Valve pin	Brass
6	1	Valve	Brass, Ni5
5	1	Stop for valve	Brass
4	1	Spring	Acid-proof steel
3	1	O-ring	NBR
2	1	Nipple body	Brass, Ni5
1	1	Checking ring	Plastic, green
Pos.	Antal Quant.	Benämning Description	Material Material

	Skala Scale	3:1	Ritad Drawn	LES	Kontroll. Checked	JE	Godk. Appr.	KK	Äm nr. Alt. no.	6202	Dat. Date	040917
	Assembly drawing						Ritning nr./Drawing No.			50_467_6200	Utg./Issue	