


This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

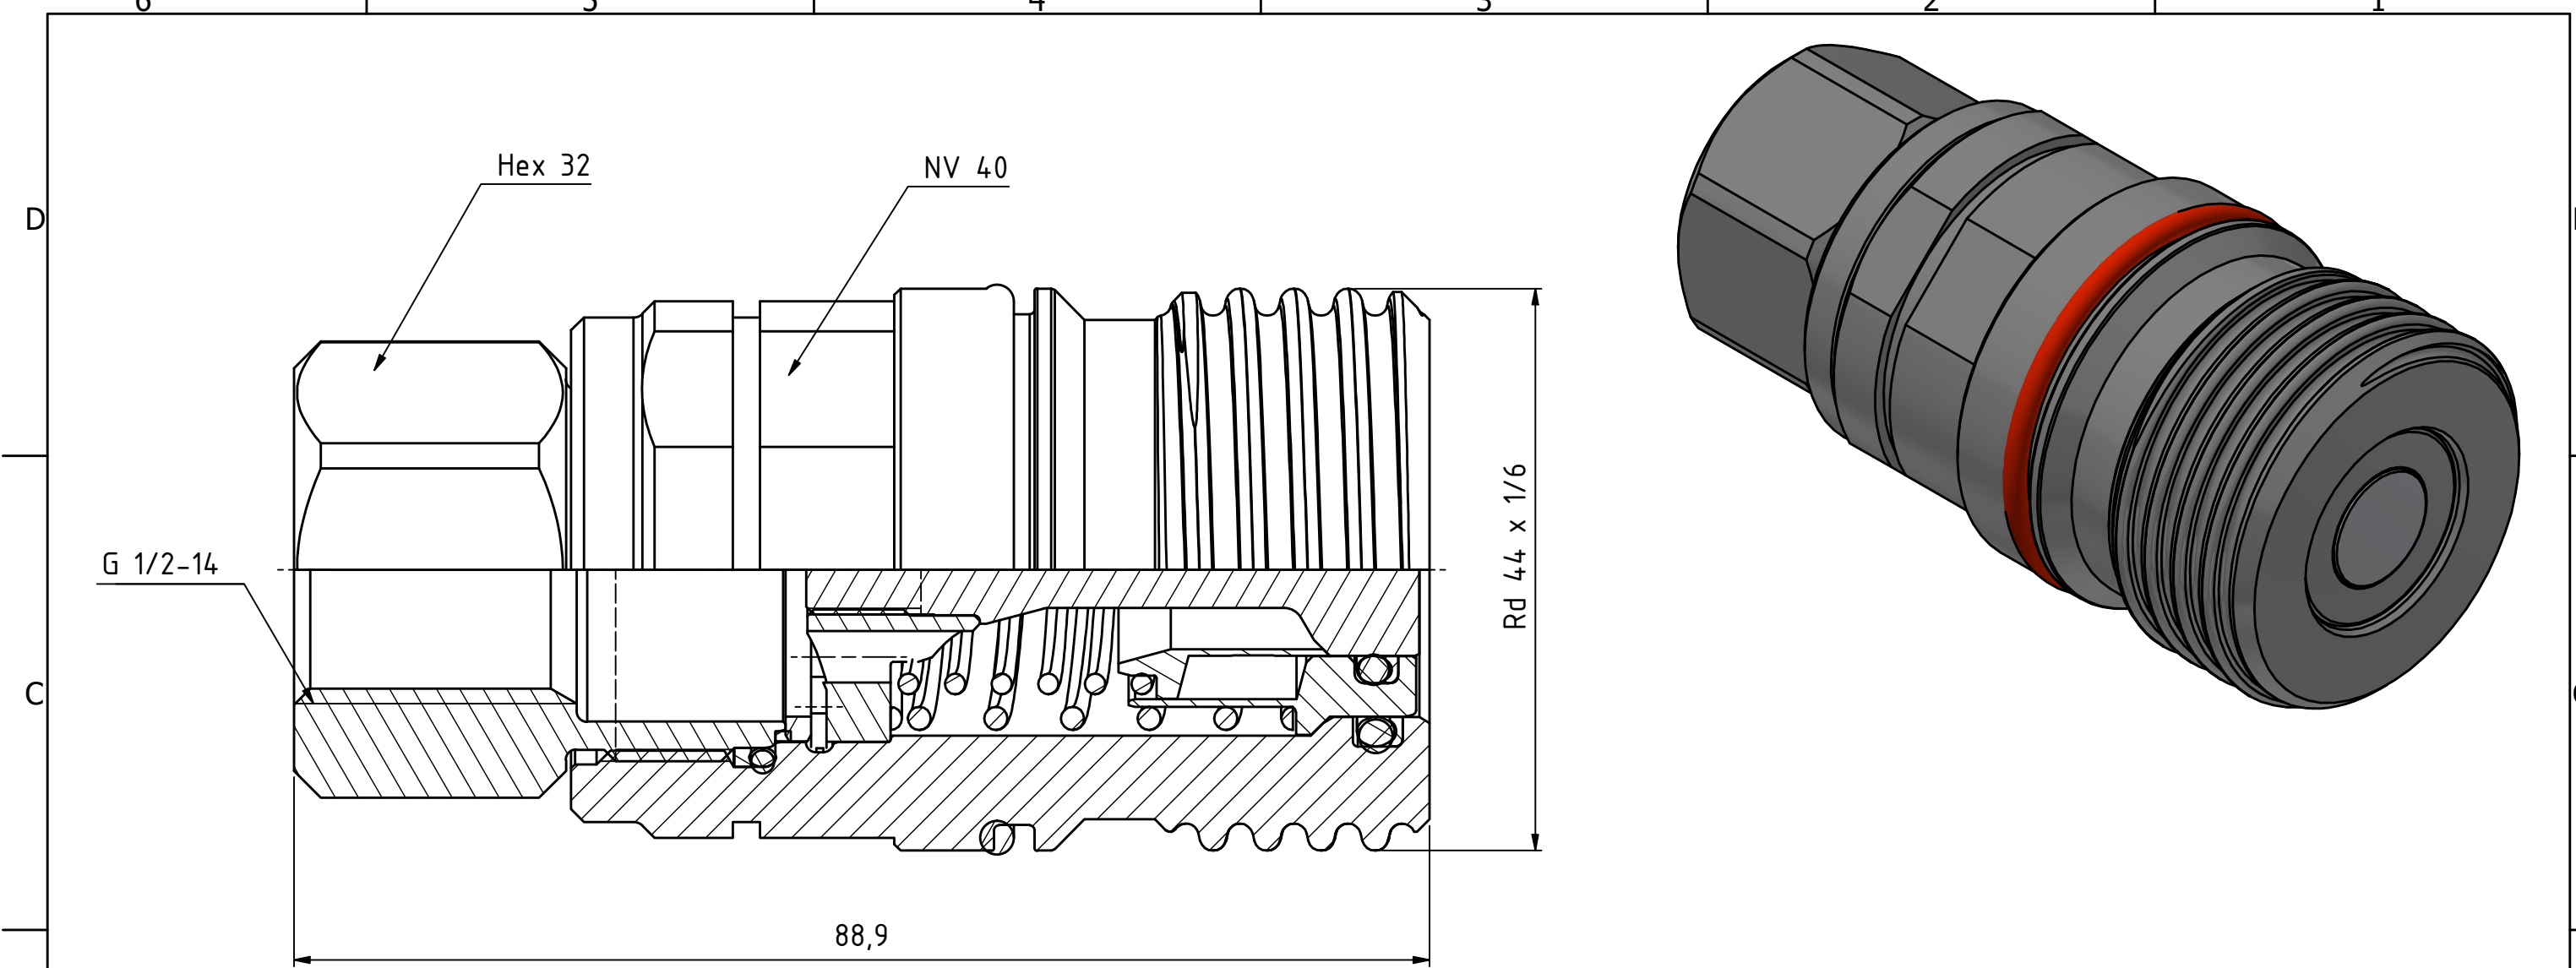

Product No. 105071205	
Nominal flow Ø DN:	mm
Connection Stroke:	mm
Max WP Connected:	420 bar
Max WP Disconnected:	420 bar
Min BP Connected:	1680 bar
Min BP Disconnected:	1050 bar
Temperature range:	-30°C - +100°C
Connection:	G 1/2"
Sealing material:	HNBR
Hexagon:	

15	1	O-ring	HNBR
14	1	O-ring	HNBR
13	1	O-ring	HNBR
12	1	Back-up ring	PTFE
11	1	Flat seal	POM
10	1	Back part	Steel, Plated
9	1	Washer	Steel
8	1	Lock ring	Steel
7	1	Back up ring	PTFE
6	1	O-ring	NBR
5	1	Back-up ring	PTFE+Bronze
4	1	Valve	Steel, Plated
3	1	Spring	Steel
2	1	Semi Assembly Valve	
1	1	Coupling body	Hardened steel, Plated
Item	Qty	Description	Material
State		Drawn	Checked
Production		CABANUN	EMPE
		Approved	Date
		JOER	2023-10-20
		ECO	Former No.
		001680	Scale
		Drawing No.	2 : 1
		105071205	Issue
			Sheet
			B 1 /(1)