

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

D

C

B



A

D

C

B

A

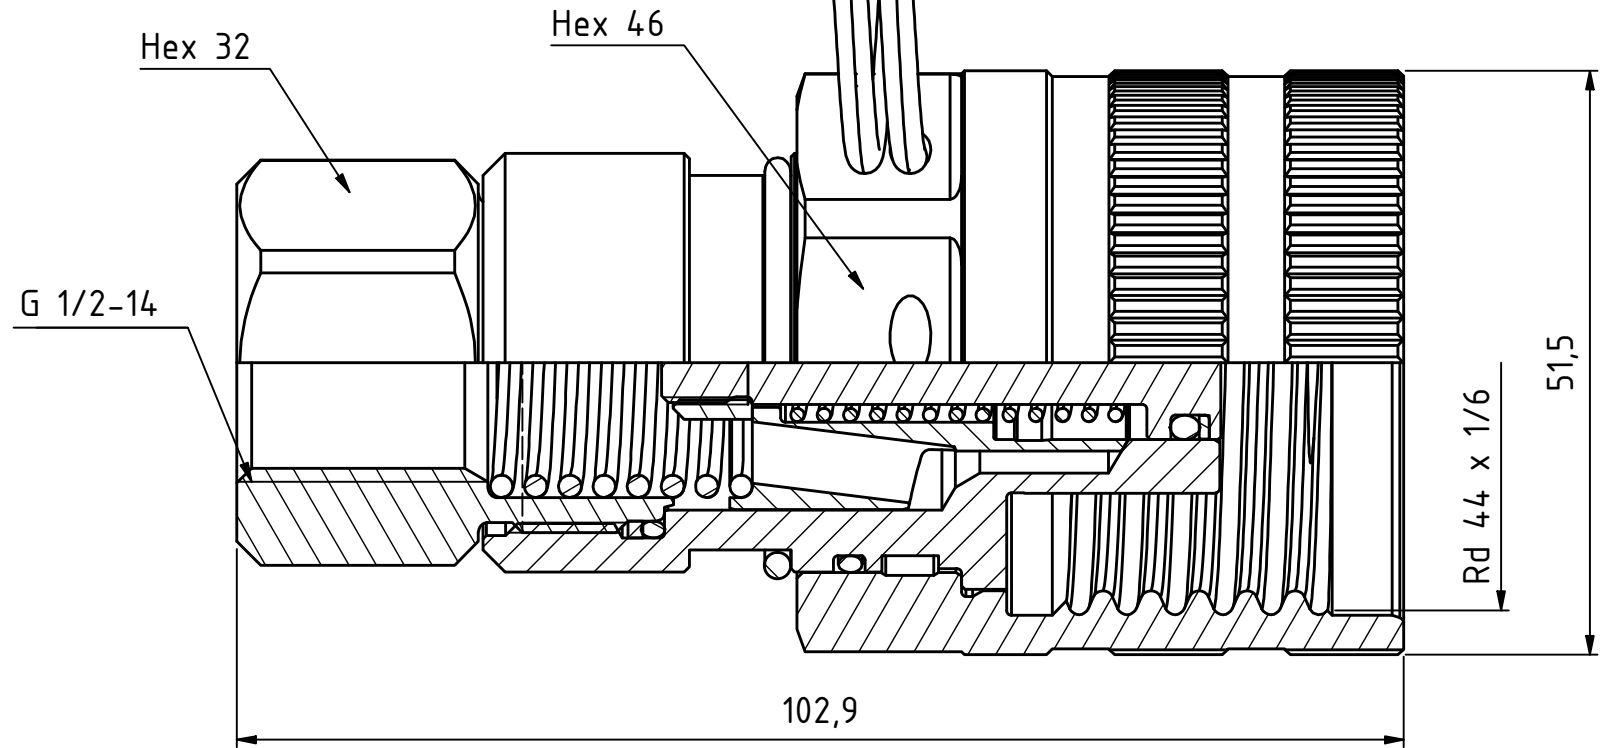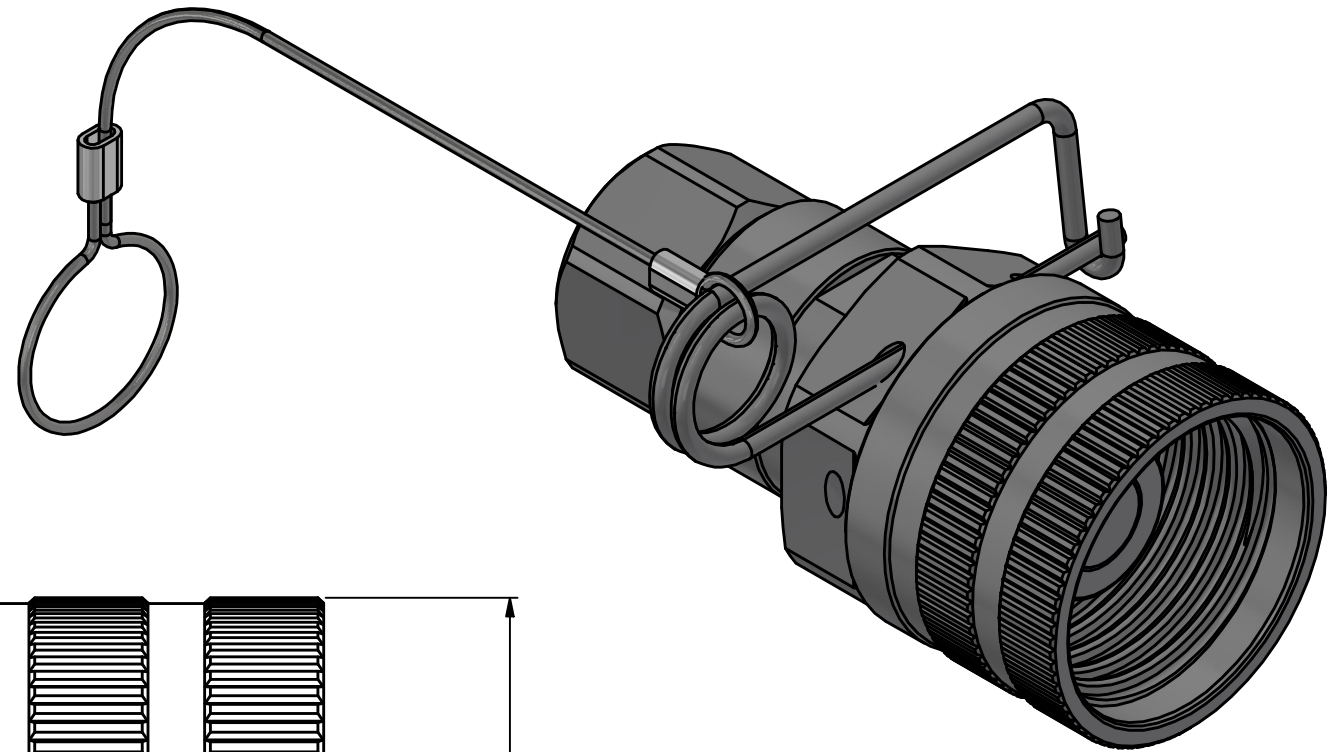

Product No. 105076205	
Nominal flow Ø DN:	11 mm
Connection Stroke:	mm
Max WP Connected:	420 bar
Max WP Disconnected:	420 bar
Min BP Connected:	1680 bar
Min BP Disconnected:	1050 bar
Temperature range:	-30°C - +100°C
Connection:	G 1/2"
Sealing material:	HNBR
Hexagon:	

10	1	O-ring	HNBR
9	1	Semi ass. - Valve HNBR	
8	1	Back-up ring	PTFE
7	1	O-ring	HNBR
6	1	Semi A. - Sprint and wire	
5	1	Wire coil	Stainless steel
4	1	Spring	Stainless steel
3	1	Back part	Steel, Plated
2	1	Locking sleeve	Steel, Plated
1	1	Semi Asm Nipple Body	
Item	Qty	Description	Material

State	Drawn	Checked	Approved	Date
Production	CABANUN	EMPE	JOER	2023-11-15
ECO		Former No.	Scale	
001680			1,5 : 1	
Drawing No.			Issue	Sheet
105076205			B	1 /(1)



Nipple TLX 1/2" - G 1/2" fem
HNBR

