

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

D

C

B


A

D

C

B

A

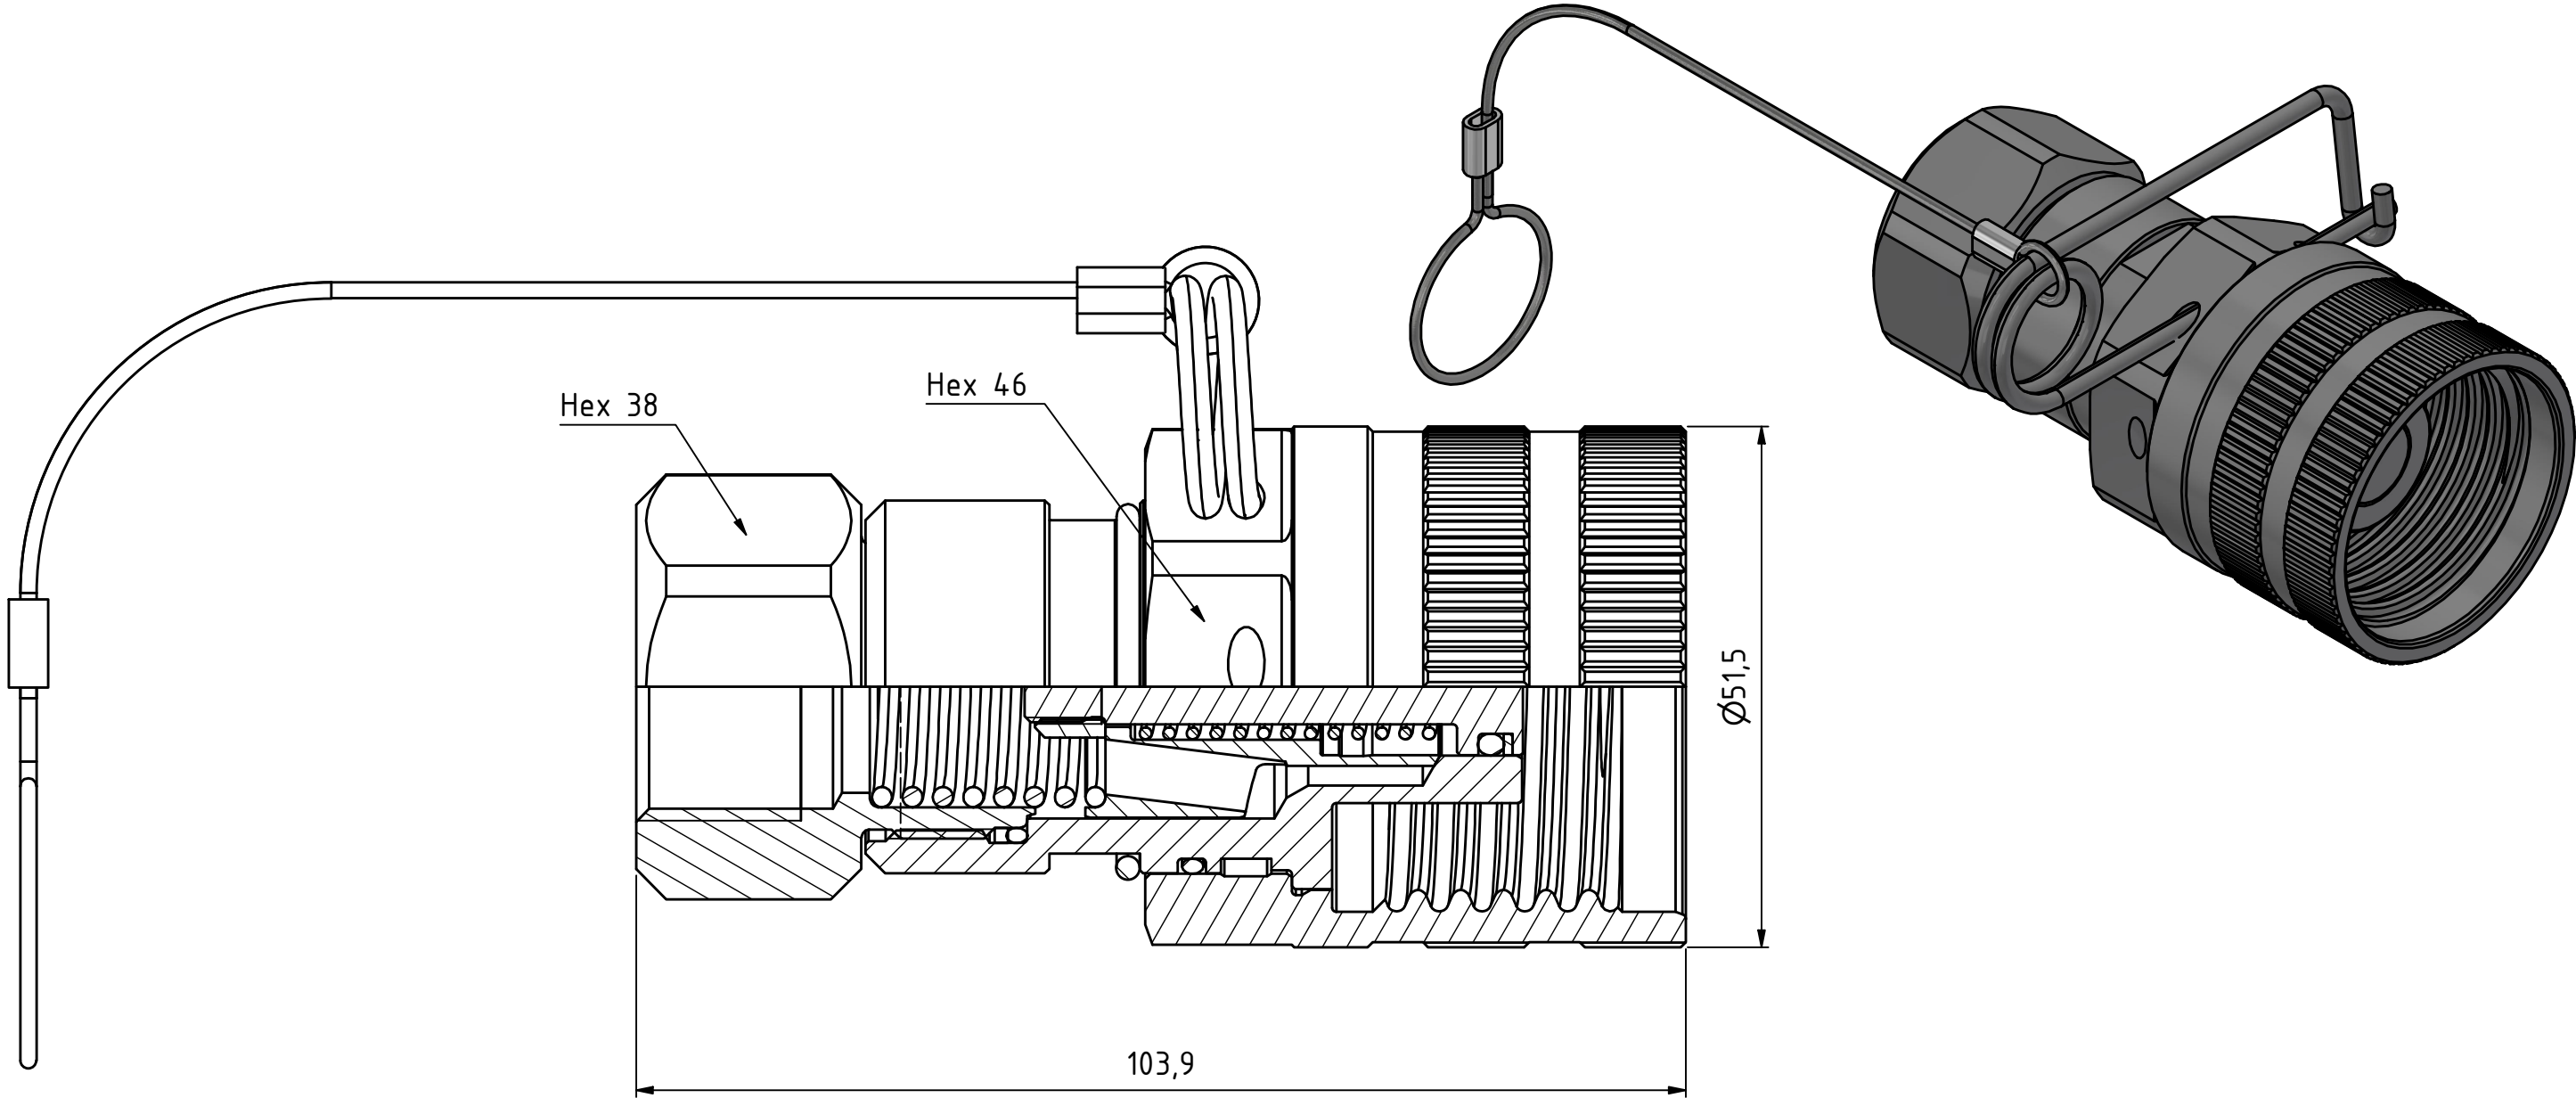

Product No. 105076207

Nominal flow $\varnothing$ DN: mm
Connection Stroke: mm
Max WP Connected: 420 bar
Max WP Disconnected: 420 bar
Min BP Connected: 1680 bar
Min BP Disconnected: 1050 bar
Temperature range: -30°C - +100°C
Connection: G 3/4"
Sealing material: HNBR
Hexagon:

10	1	Semi ass. - Valve HNBR	
9	1	Back-up ring	PTFE
8	1	Back part	Steel, Plated
7	1	O-ring	HNBR
6	1	Semi A. - Sprint and wire	
5	1	Wire coil	Stainless steel
4	1	O-ring	HNBR
3	1	Spring	Stainless steel
2	1	Locking sleeve	Steel, Plated
1	1	Semi Asm Nipple Body	
Item	Qty	Description	Material

State Production	Drawn CABANUN	Checked EMPE	Approved JOER	Date 2023-11-15
ECO 001680		Former No.		Scale 1,5 : 1
Drawing No. 105076207			Issue B	Sheet 1 / (1)



Nipple TLX 1/2" - G 3/4" fem
HNBR