


This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D
C
B
A

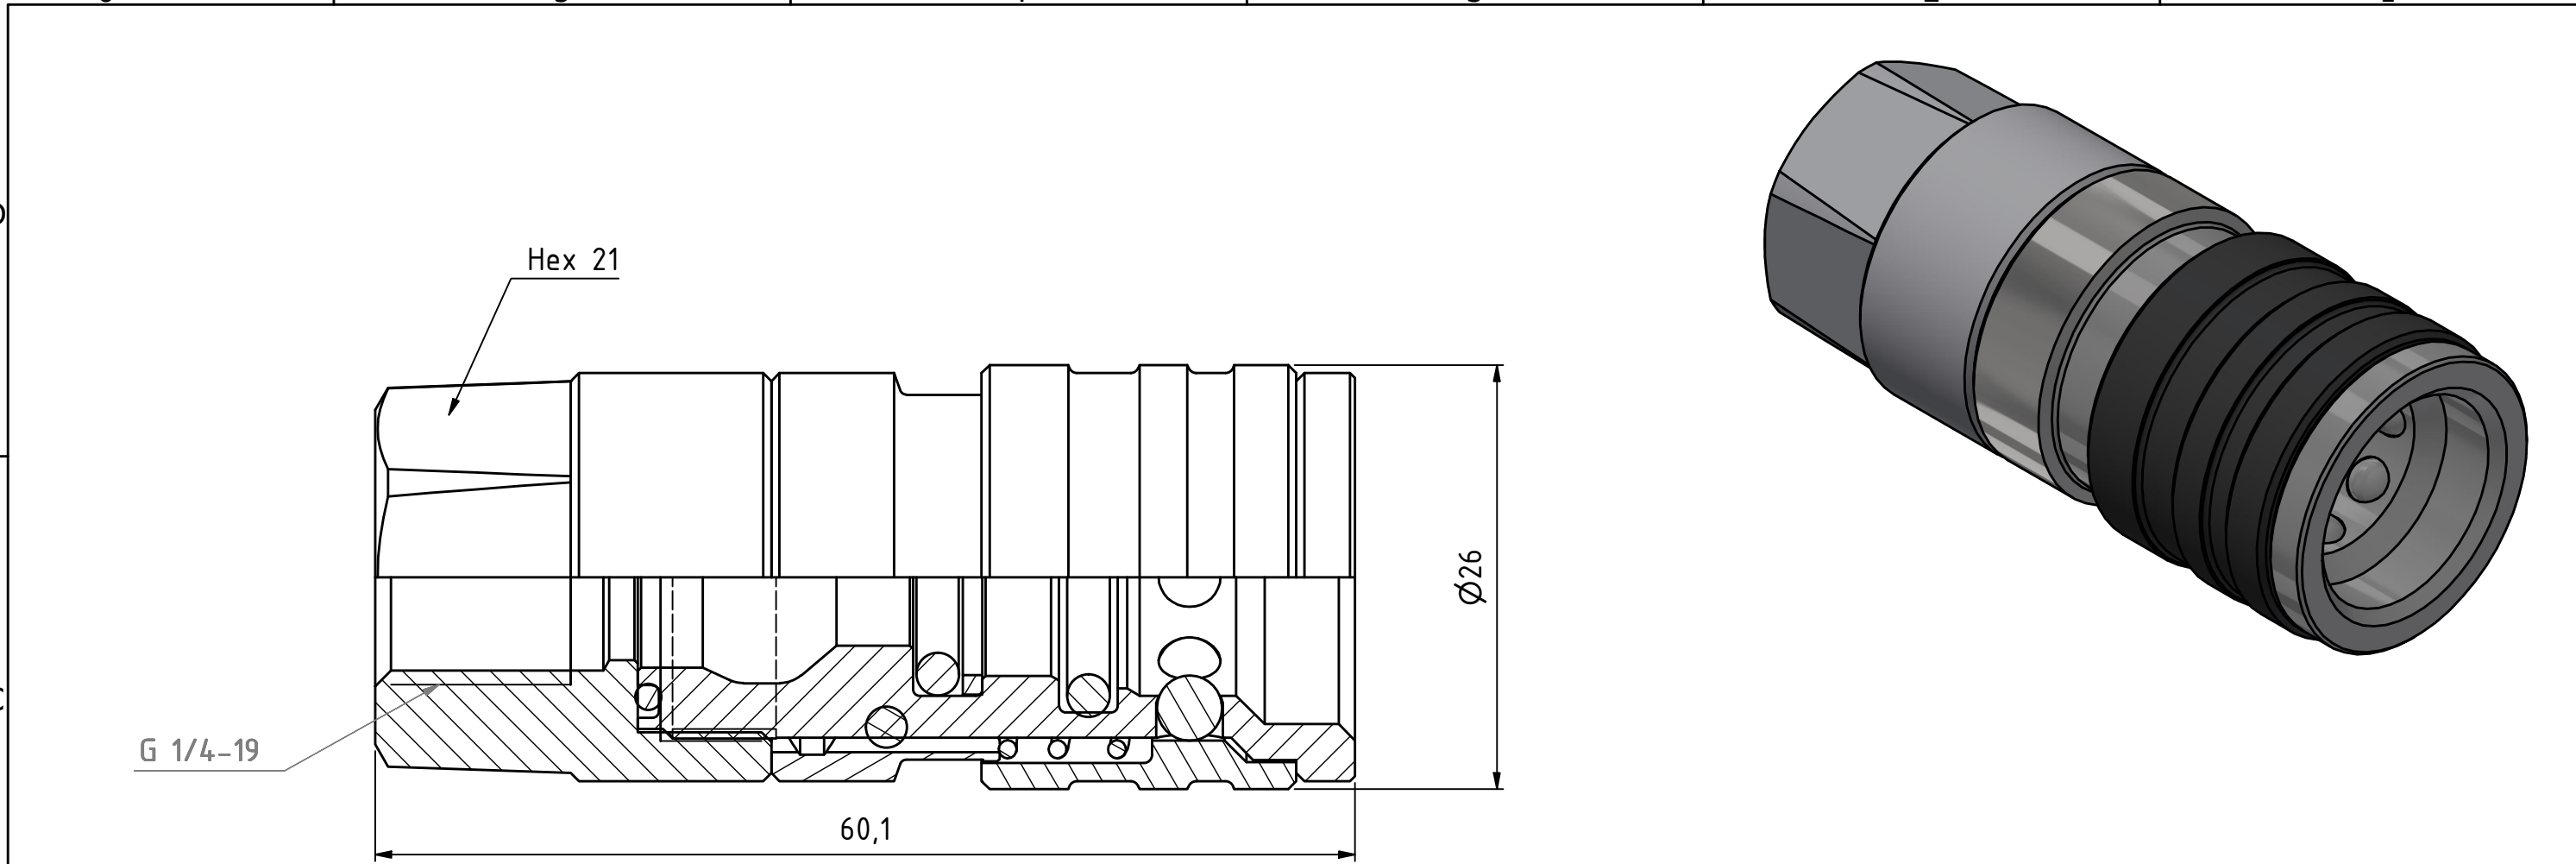

Product No. 105250202	
Nominal flow Ø DN:	6.3 mm
Connection Stroke:	- mm
Max WP Connected:	450 bar
Max WP Disconnected:	300 bar
Min BP Connected:	1800 bar
Min BP Disconnected:	1200 bar
Temperature range:	-30°C - 100°C
Connection:	G 1/4" Fem
Sealing material:	NBR
Hexagon:	21

11	1	Ball	Stainless steel	091414800
10	1	O-ring	NBR	091712803
9	1	O-ring 11.91x2.62	NBR	094142801
8	1	O-ring	NBR	095252800
7	1	Spring	Stainless steel	095253200
6	1	Locking ring	Steel, Zn-Ni	095253300
5	1	Locking sleeve	Steel, hard. Zn-Ni	095252500
4	8	Ball	Stainless steel	091154800
3	1	Back-up ring	PTFE	095255600
2	1	Back part	Steel, Zn-Ni	095254322
1	1	Front part	Steel, Zn-Ni	095252000
Item	Qty	Description	Material	Part Number
		Scale 2,5 : 1	Drawn PeOd	Checked
		Appr. -		ECO
		Date 2019-01-24		Issue
		Drawing No. 105250202		Sheet
		Assembly Drawing		A 1 / (1)